TAOGLAS

Datasheet

Maximus Series
Part No:
FXUB16.07.0150AQ

Description

Wideband Cellular 90x15mm Flex PCB Antenna (617-6000MHz)

with 90° feed Black 150mm 1.37 Cable and I-PEX MHF I

Features:

Super Small Wideband Cellular Flex PCB Antenna
Covering Global Cellular Bands from 617-6000MHz
Dimensions: 90 x 15 x 0.24mm
Cable:150mm of 1.37 Coaxial Cable (Black)
Connector: I-PEX MHF I
RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	7
4.	Packaging	8
5.	Antenna Characteristics	9
6.	Radiation Patterns	13
	Changelog	53

Ireland & USA
ISO 9001:2015
Certified

Taiwan
ISO 9001:2015
Certified

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction

The Maximus Series FXUB16 is the smallest Taoglas wideband flex PCB antenna by footprint size. Engineered to cover all global working frequencies in the 600-8000 MHz spectrum with efficiencies of up to 60%, it is the perfect solution when size constraints limit the use of a larger antenna. It covers all cellular 5G and 4G bands with fall back to 3G/2G, and it also functions for NB-IoT, Cat-M, Wi-Fi, ISM and Wi-Fi 6 frequencies. This wide band coverage enables designers to use only one antenna to cover all frequencies and future proofs device design for 5G and 4G globally.

Typical Applications for the FXUB16 include:

- Gateways, Routers and Private LTE Networks
- In-Building Connectivity and Security Systems
- Point of Sales Kiosks and Retail Digital Signage
- Connected Industry and Smart Metering
- Handheld Devices and Tablets
- Mobile Wireless Camera Systems

The antenna is delivered with a flexible body for ease of installation and is supplied with 1.37 micro coax cable and IPEX(TM) MHF I connector as standard. At just 90.4 × 15 × 0.24mm, the antenna is compact and ultra-thin. It is integrated into a device by a simple “peel and stick” process, attaching securely to non-metal surfaces via strong, 3M adhesive. It is also the ideal antenna to fit in devices that are being retrofitted with wireless functionality, as it will cover non cellular applications such as 868, 915MHz or Zigbee applications. Its inherently wide bandwidth is more resistant to detuning than traditional small but narrow-band legacy antennas. It is an ideal choice for any device maker that needs to keep manufacturing costs down over the lifetime of a product, as the same antenna can be used if the radio module is upgraded to work on a different frequency band.

Cables and Connectors are fully customisable, contact your local Taoglas Customer Services Team for more information.

2. Specification

LTE Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5GNR/4G Band71	617-698	Cable Feed Left	19.9	-7.02	-1.83	50 Ω	Linear	Omni directional	10W
		Cable Feed Right	36.5	-4.38	-0.17				
		Cable Feed Straight	26.6	-5.75	-1.09				
4G/3G Band 12,13,14,17,28,29	698-824	Cable Feed Left	35.2	-4.54	-0.29				
		Cable Feed Right	48.8	-3.11	0.50				
		Cable Feed Straight	41.7	-3.79	0.01				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	Cable Feed Left	34.6	-4.61	-0.52				
		Cable Feed Right	38.8	-4.11	-0.56				
		Cable Feed Straight	35.4	-4.50	-0.77				
5GNR/4G Band 21,32,74,75,76	1427-1518	Cable Feed Left	13.1	-8.84	-1.72				
		Cable Feed Right	15.3	-8.15	-1.54				
		Cable Feed Straight	13.8	-8.61	-1.83				
4G/3G Band 1,2,3,4,9,23,25,35,39, 66	1710-2200	Cable Feed Left	57.1	-2.43	2.53				
		Cable Feed Right	61.7	-2.10	3.00				
		Cable Feed Straight	59.6	-2.25	2.10				
4G/3G Band 7,30,38,40,41	2300-2690	Cable Feed Left	52.9	-2.76	4.06				
		Cable Feed Right	58.3	-2.34	4.10				
		Cable Feed Straight	55.9	-2.53	3.61				
5GNR/4G Band 22,42,48,77,78,79	3300-5000	Cable Feed Left	49.6	-3.05	5.35				
		Cable Feed Right	53.2	-2.74	5.94				
		Cable Feed Straight	51.8	-2.86	6.05				
LTE5200/Wi-Fi5800	5150-5925	Cable Feed Left	44.5	-3.52	5.24				
		Cable Feed Right	45.8	-3.39	6.32				
		Cable Feed Straight	46.8	-3.30	5.90				

4G/5G Bands					
Band Number	5GNR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA				
	Uplink	Downlink	Cable Feed Left	Cable Feed Right	Cable Feed Straight
B1	1920 to 1980	2110 to 2170	✓	✓	✓
B2	1850 to 1910	1930 to 1990	✓	✓	✓
B3	1710 to 1785	1805 to 1880	✓	✓	✓
B4	1710 to 1755	2110 to 2155	✓	✓	✓
B5	824 to 849	869 to 894	✓	✓	✓
B7	2500 to 2570	2620 to 2690	✓	✓	✓
B8	880 to 915	925 to 960	✓	✓	✓
B9*	1749.9 to 1784.9	1844.9 to 1879.9	✓	✓	✓
B11	1427.9 to 1447.9	1475.9 to 1495.9	✗	✗	✗
B12	699 to 716	729 to 746	✓	✓	✓
B13	777 to 787	746 to 756	✓	✓	✓
B14	788 to 798	758 to 768	✓	✓	✓
B17	704 to 716	734 to 746	✓	✓	✓
B18	815 to 830	860 to 875	✓	✓	✓
B19	830 to 845	875 to 890	✓	✓	✓
B20	832 to 862	791 to 821	✓	✓	✓
B21	1447.9 to 1462.9	1495.9 to 1510.9	✗	✗	✗
B22*	3410 to 3490	3510 to 3590	✓	✓	✓
B23*	2000 to 2020	2180 to 2200	✓	✓	✓
B24	1626.5 to 1660.5	1525 to 1559	✓	✓	✓
B25	1850 to 1915	1930 to 1995	✓	✓	✓
B26	814 to 849	859 to 894	✓	✓	✓
B27*	807 to 824	852 to 869	✓	✓	✓
B28	703 to 748	758 to 803	✓	✓	✓
B29	717 to 728		✓	✓	✓
B30	2305 to 2315	2350 to 2360	✓	✓	✓
B31	452.5 to 457.5	462.5 to 467.5	✗	✗	✗
B32	1452 to 1496		✗	✗	✗
B34	2010 to 2025		✓	✓	✓
B35	1850 to 1910		✓	✓	✓
B36	1930 to 1990		✓	✓	✓
B37	1910 to 1930		✓	✓	✓
B38	2570 to 2620		✓	✓	✓
B39	1880 to 1920		✓	✓	✓
B40	2300 to 2400		✓	✓	✓
B41	2496 to 2690		✓	✓	✓
B42	3400 to 3600		✓	✓	✓
B43	3600 to 3800		✓	✓	✓
B45	1447 to 1467		✗	✗	✗
B46	5150 to 5925		✓	✓	✓
B47	5855 to 5925		✓	✓	✓
B48	3550 to 3700		✓	✓	✓
B49	3550 to 3700		✓	✓	✓
B50	1432 to 1517		✗	✗	✗
B51	1427 to 1432		✗	✓	✓
B52	3300 to 3400		✓	✓	✓
B53	2483.5 to 2495		✓	✓	✓
B65	1920 to 2010	2110 to 2200	✓	✓	✓
B66	1710 to 1780	2110 to 2200	✓	✓	✓
B68	698 to 728	753 to 783	✓	✓	✓
B69	2570 to 2620		✓	✓	✓
B70	1695 to 1710	1995 to 2020	✓	✓	✓
B71	663 to 698	617 to 652	✗	✓	✓
B72	451 to 456	461 to 466	✗	✗	✗
B73	450 to 455	460 to 465	✗	✗	✗
B74	1427 to 1470	1475 to 1518	✗	✗	✗
B75	1432 to 1517		✗	✗	✗
B76	1427 to 1432		✗	✓	✓
B77	3300 to 4200		✓	✓	✓
B78	3300 to 3800		✓	✓	✓
B79	4400 to 5000		✓	✓	✓
B85	698 to 716	728 to 746	✓	✓	✓
B87	410 to 415	420 to 425	✗	✗	✗
B88	412 to 417	422 to 427	✗	✗	✗

Mechanical	
Dimensions	90 x 15 x 0.24mm
Weight	--
Material	Flexible PCB
Connector	IPEX MHF I
Cable	150mm of 1.37 Coaxial

Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH

3. Mechanical Drawing

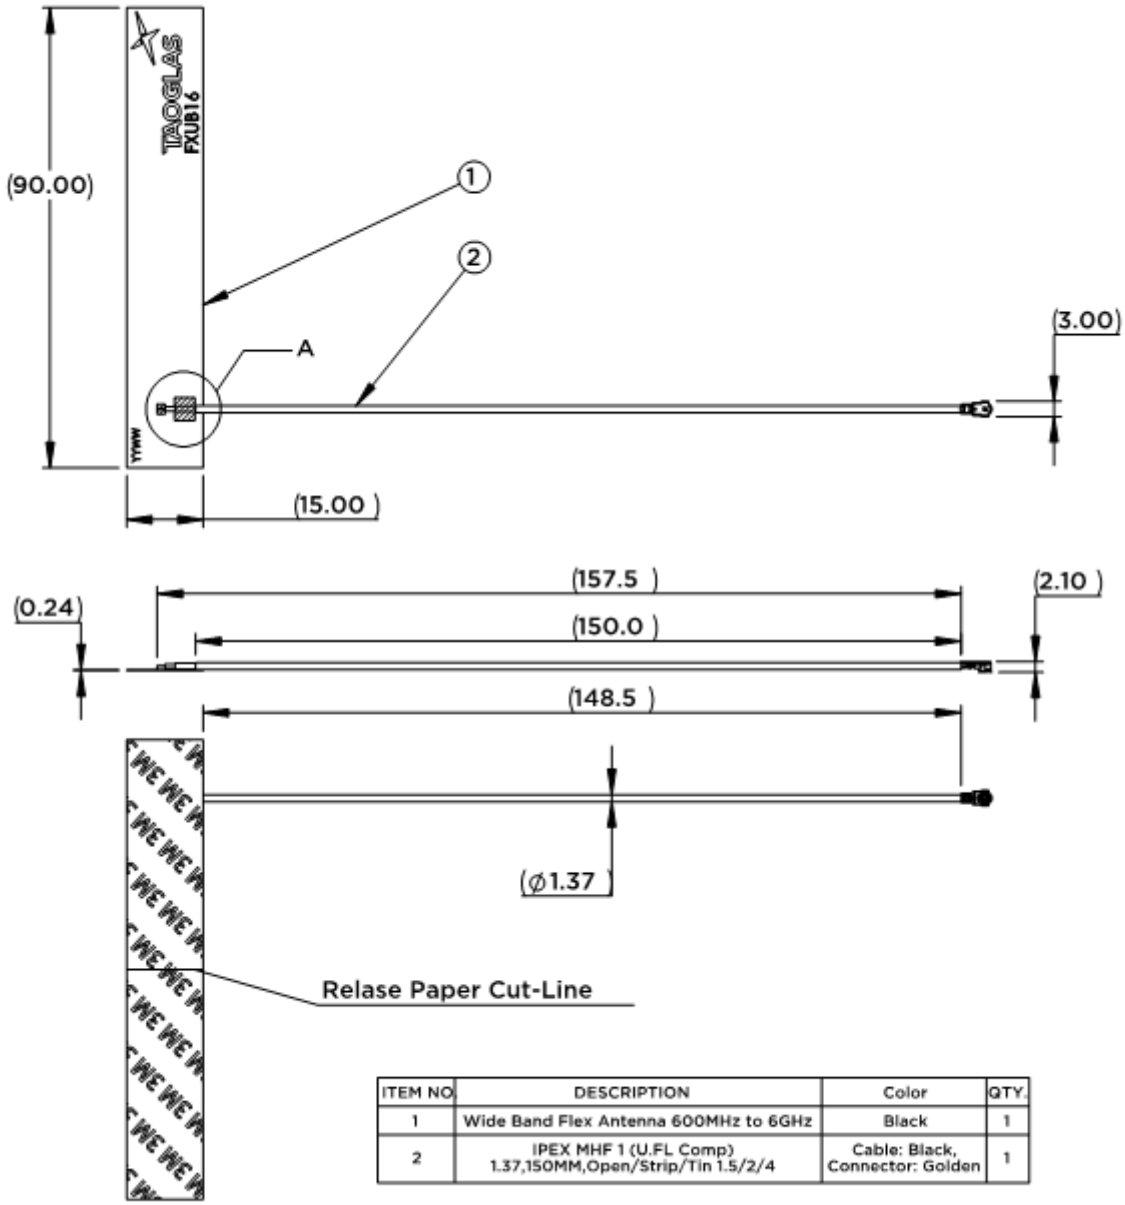

ITEM NO.	DESCRIPTION	Color	QTY.
1	Wide Band Flex Antenna 600MHz to 6GHz	Black	1
2	IPEX MHF 1 (U.FL Comp) 1.37,150MM,Open/Strip/Tin 1.5/2/4	Cable: Black, Connector: Golden	1

4. Packaging

100pcs per PE bag
Bag dimensions: 180 x 265mm
Weight:0.13Kg

3000pcs per carton
Carton dimensions: 360 x 310 x 160mm
Weight: 4.45Kg

5. Antenna Characteristics

5.1 Test Setup

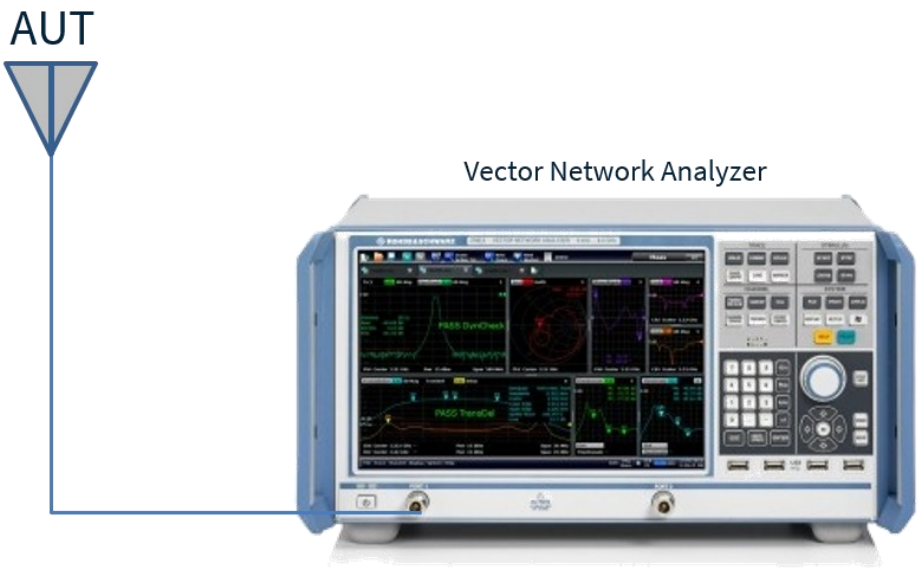

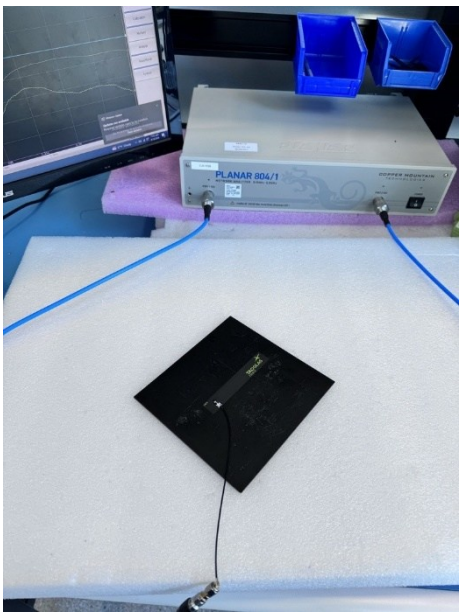

Cable Feed Left

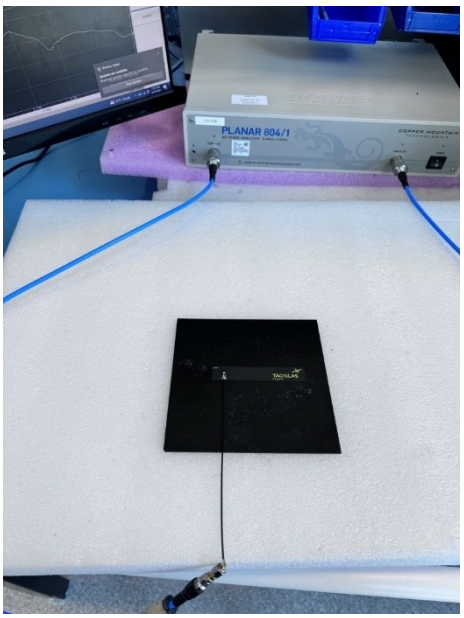

Cable Feed Straight

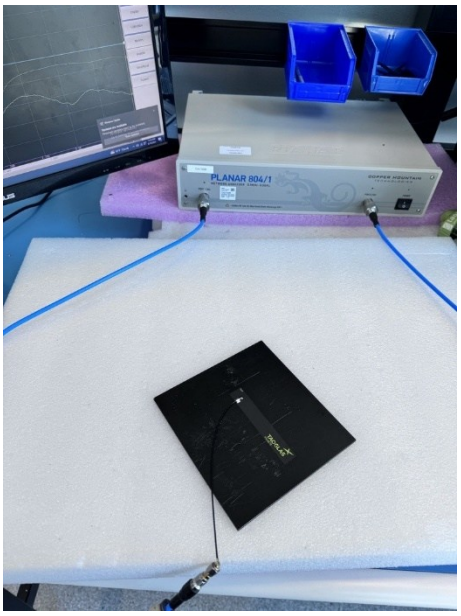

Cable Feed Right

5.2 Return Loss

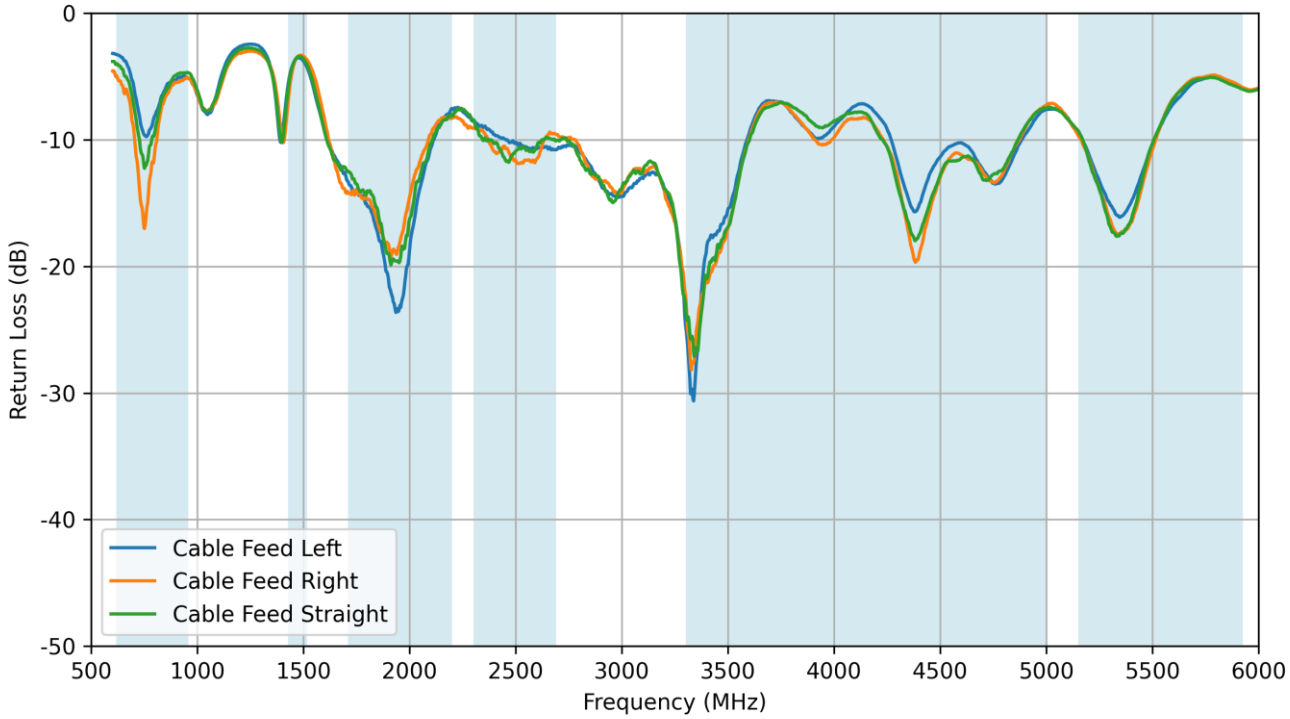

5.3 VSWR

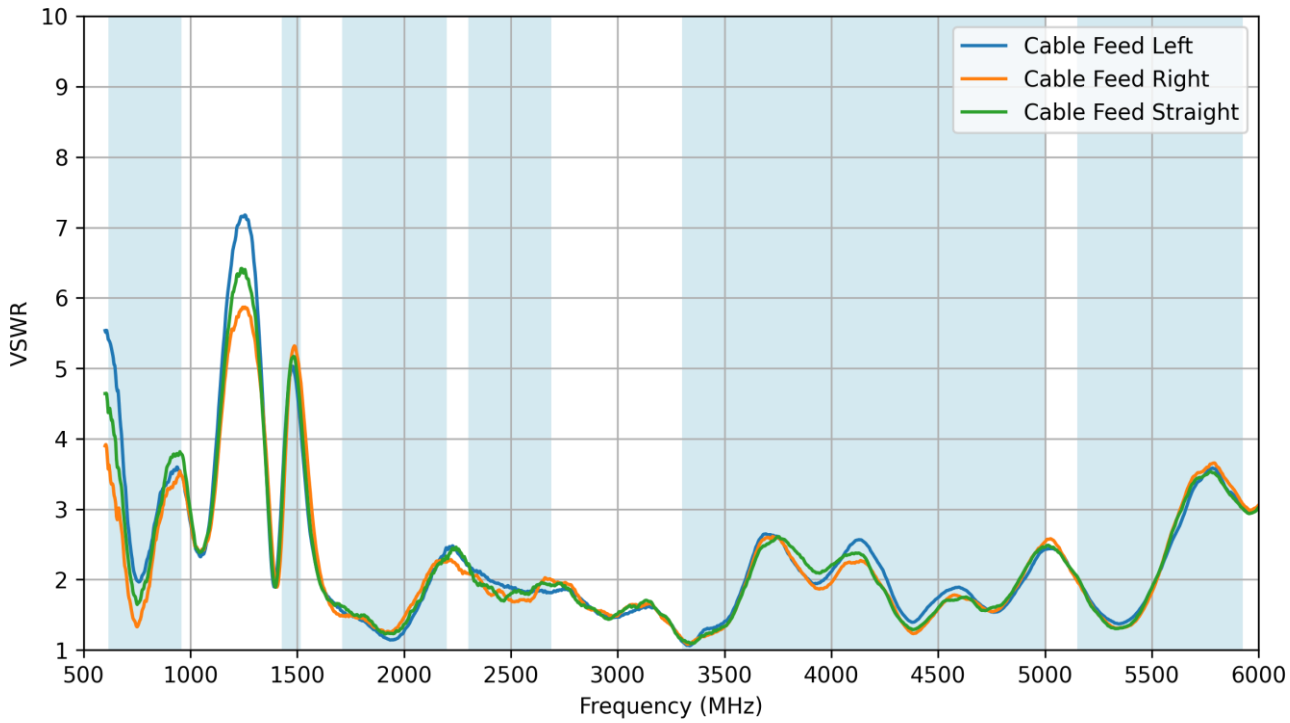

5.4 Efficiency

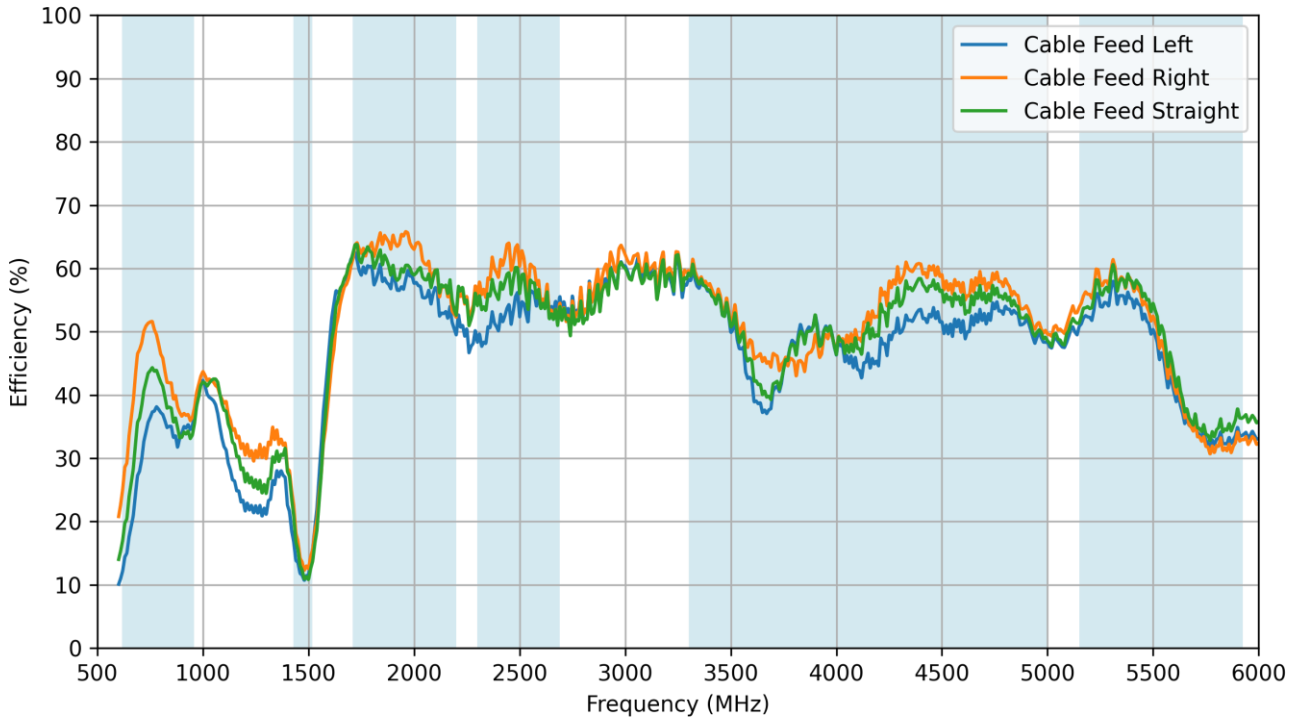

5.5 Average Gain

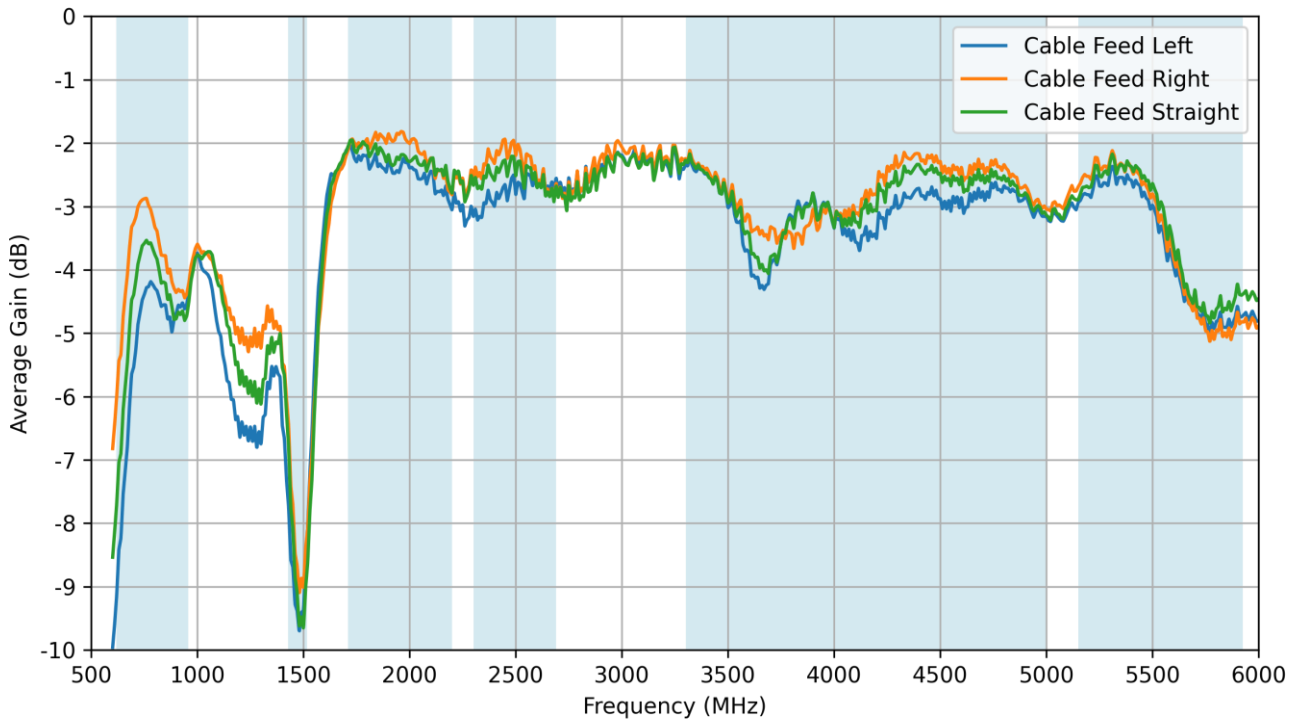

5.6 Peak Gain

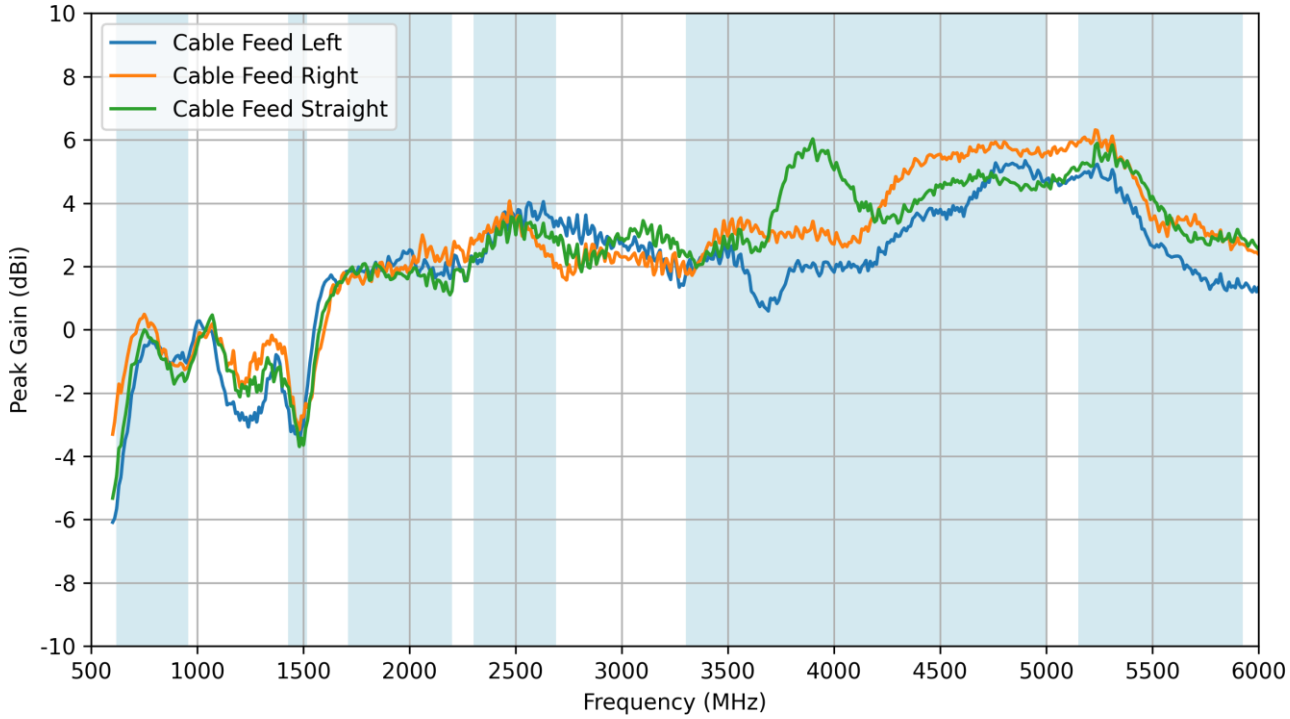
Cable Feed Left
Cable Feed Right
Cable Feed Straight
Peak Gain (dBi)
Frequency (MHz)
10
8
6
4
2
0
-2
-4
-6
-8
-10
500
1000
1500
2000
2500
3000
3500
4000
4500
5000
5500
6000

6. Radiation Patterns

6.1 Test Setup

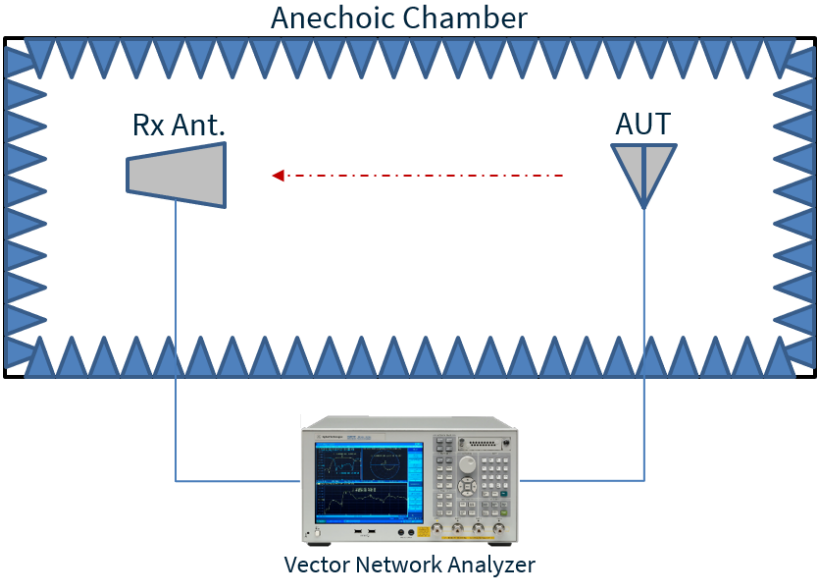

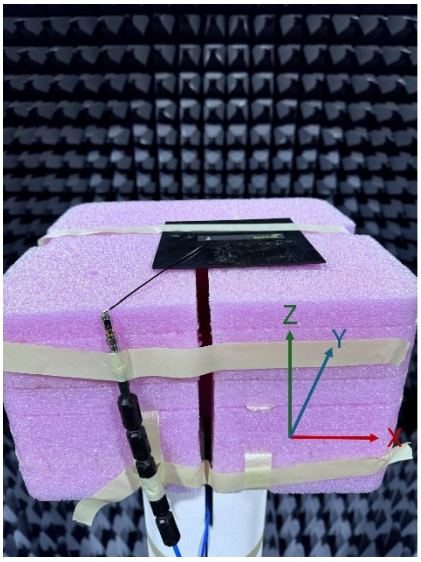

Cable Feed Left

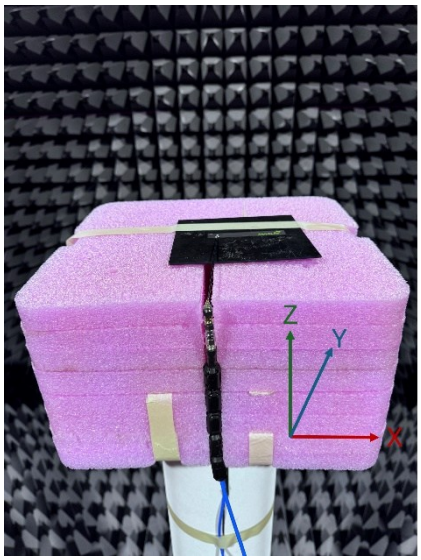

Cable Feed Straight

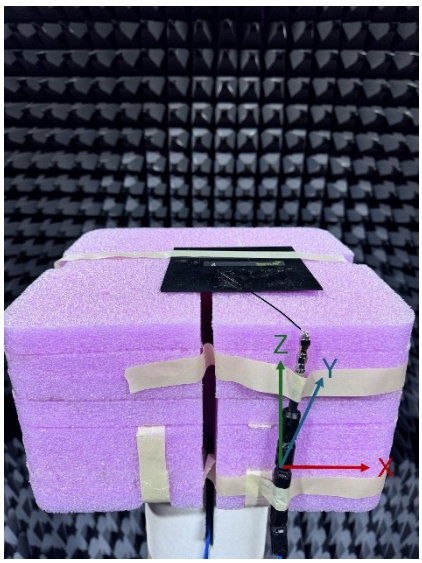

Cable Feed Right

6.2 Cable Feed Left Patterns at 650 MHz

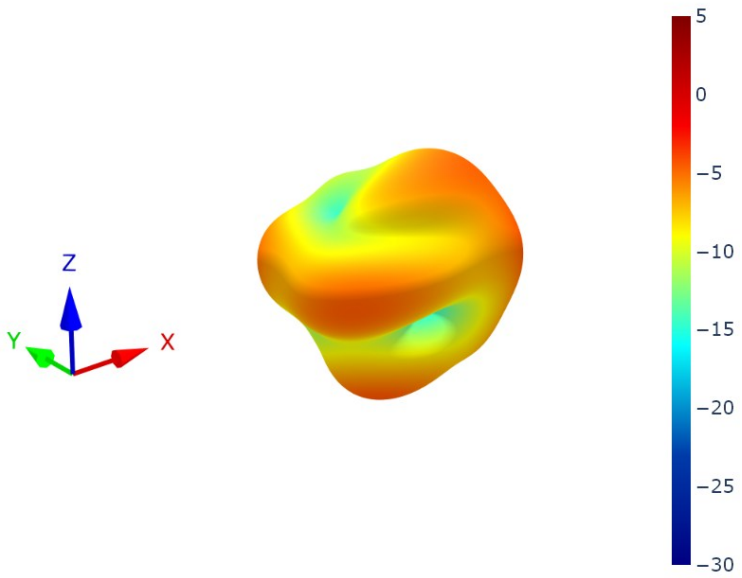

XZ Plane	YZ Plane	XY Plane

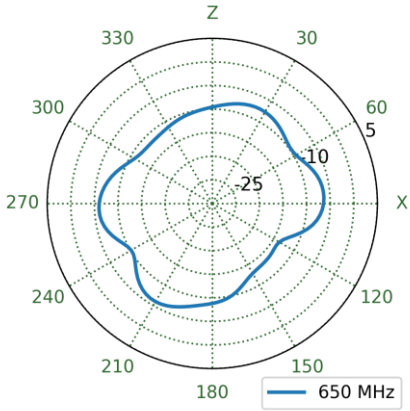

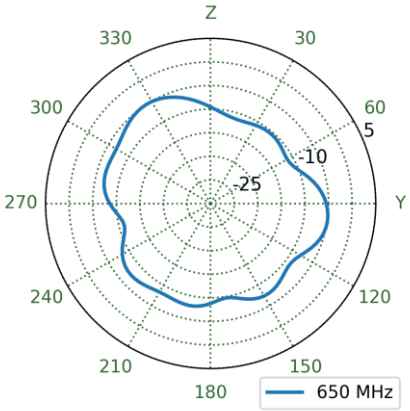

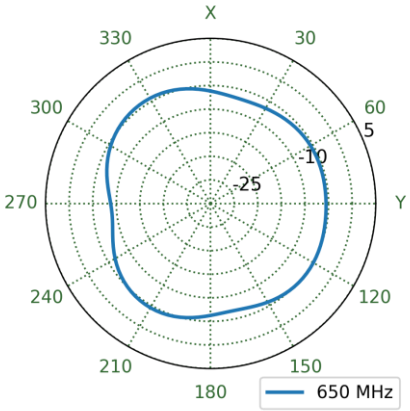

6.3 Cable Feed Right Patterns at 650 MHz

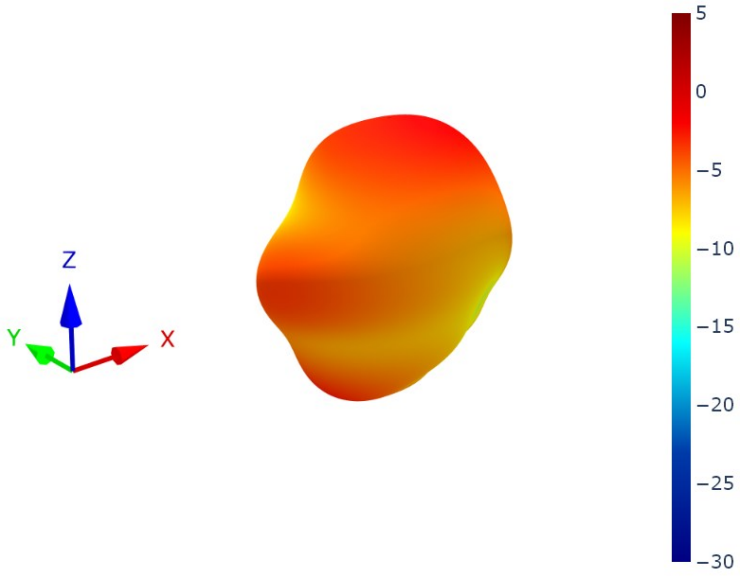

XZ Plane	YZ Plane	XY Plane

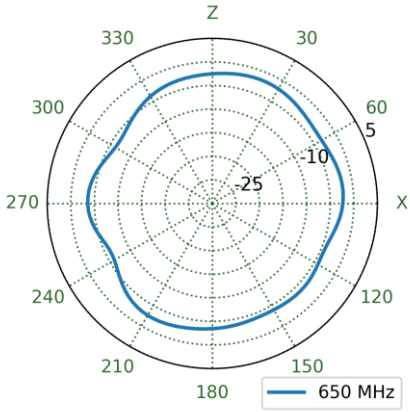

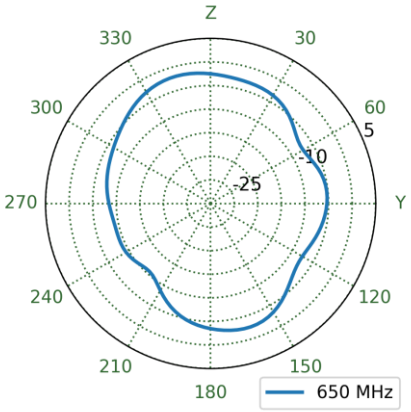

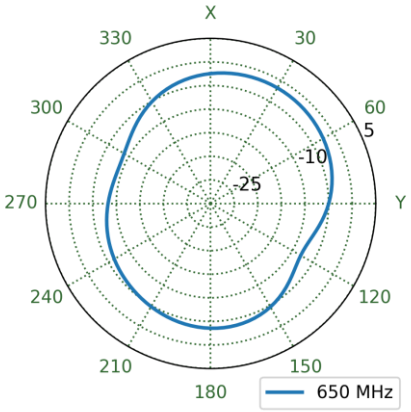

6.4 Cable Feed Straight Patterns at 650 MHz

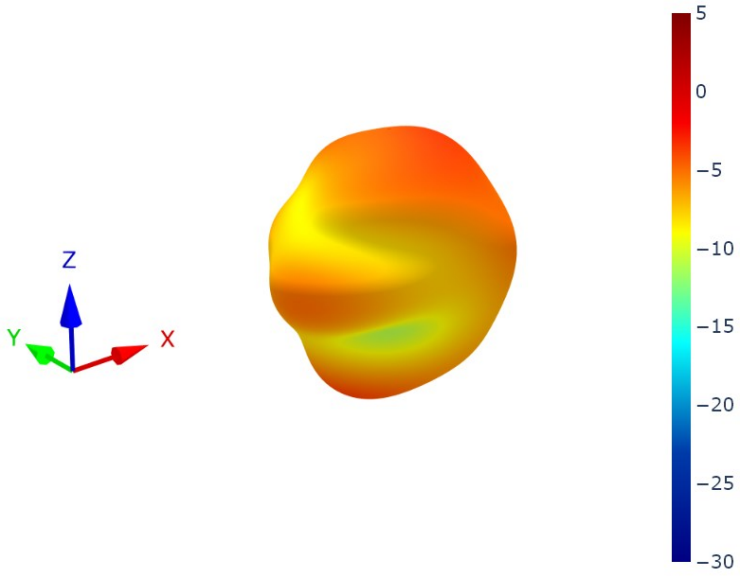

XZ Plane	YZ Plane	XY Plane

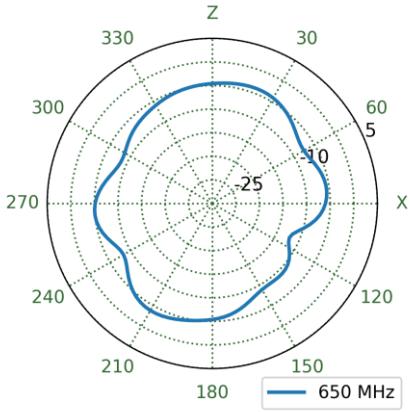

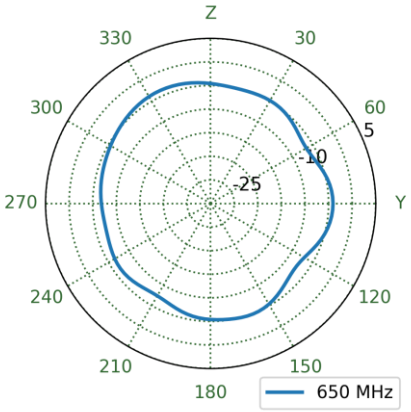

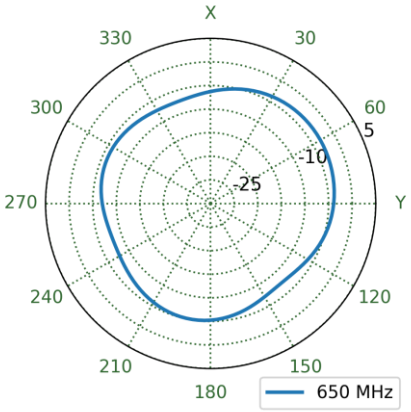

6.5 Cable Feed Left Patterns at 750 MHz

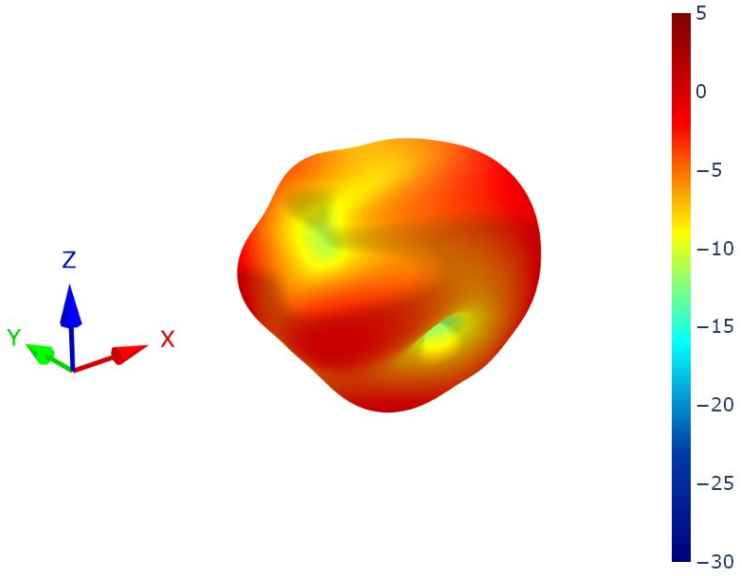

XZ Plane	YZ Plane	XY Plane

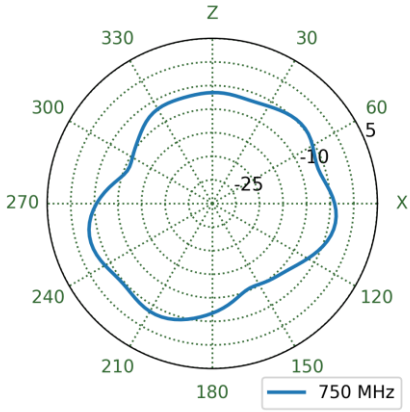

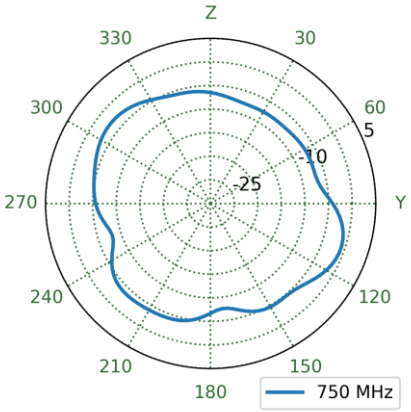

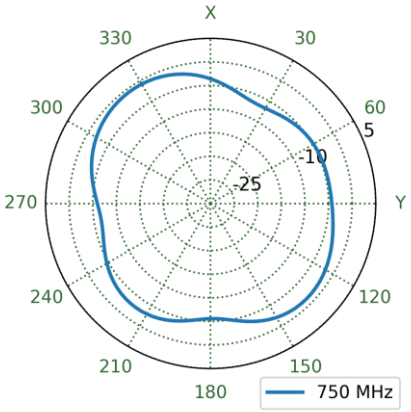

6.6 Cable Feed Right Patterns at 750 MHz

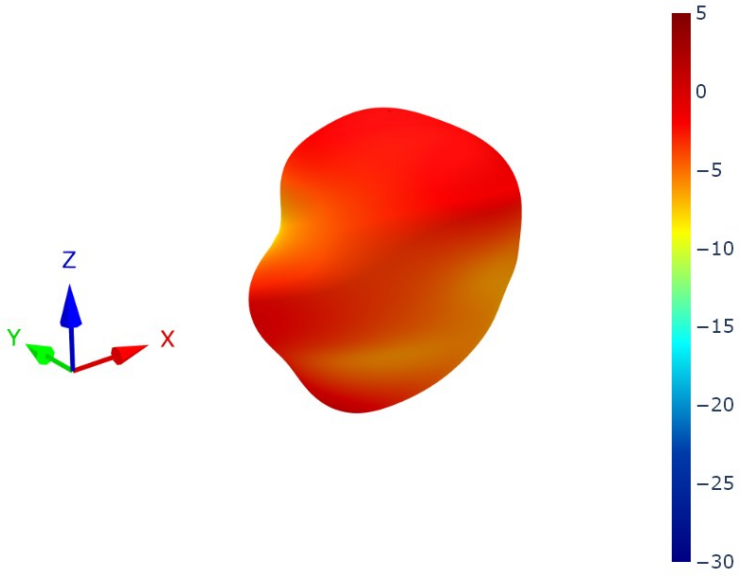

XZ Plane	YZ Plane	XY Plane

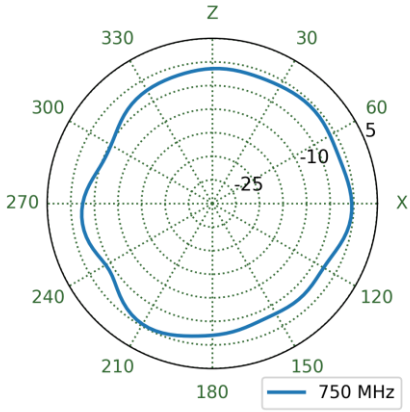

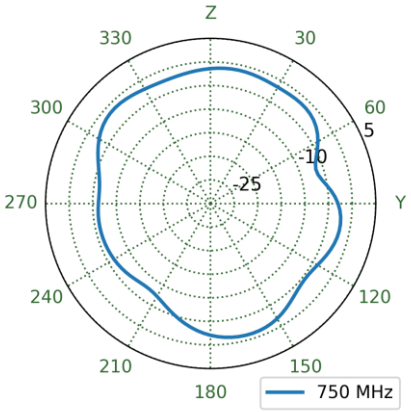

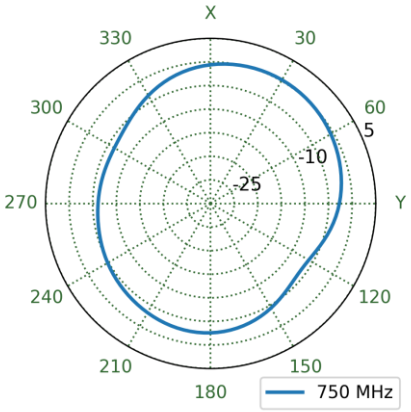

6.7 Cable Feed Straight Patterns at 750 MHz

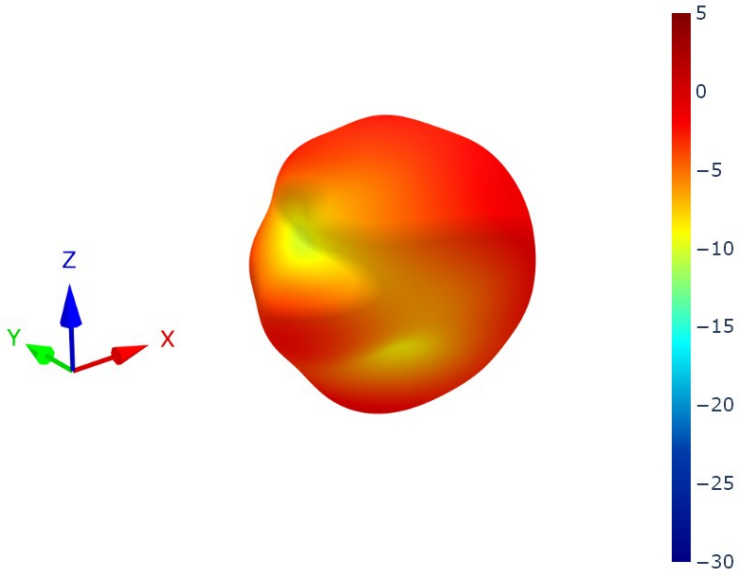

XZ Plane	YZ Plane	XY Plane

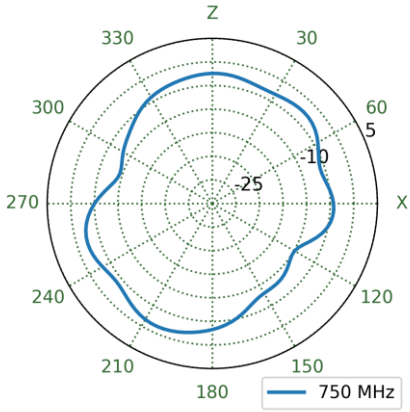

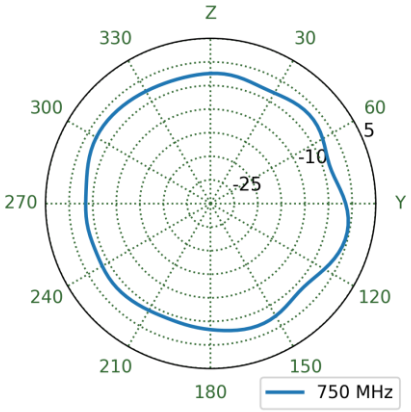

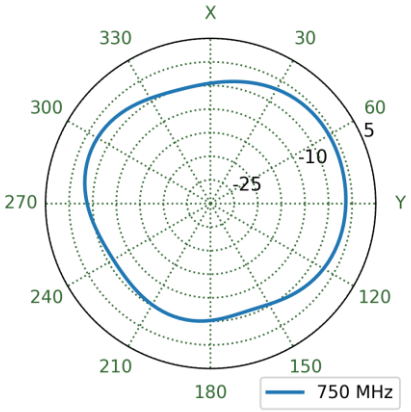

6.8 Cable Feed Left Patterns at 890 MHz

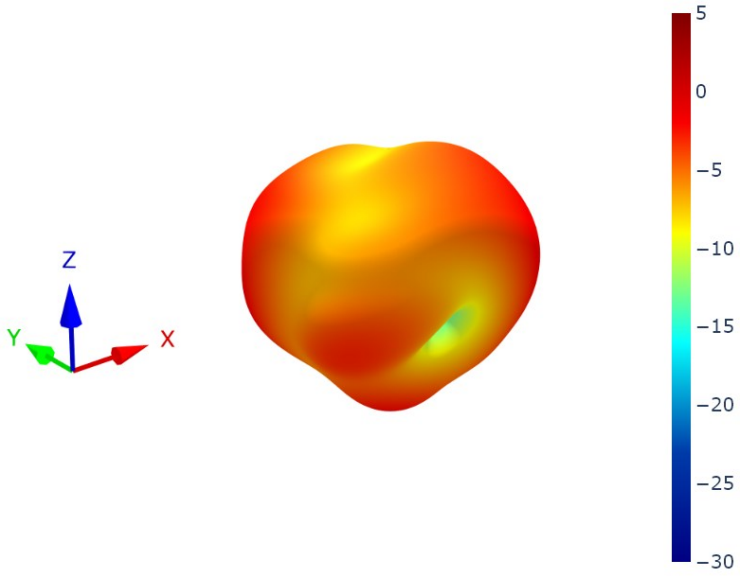

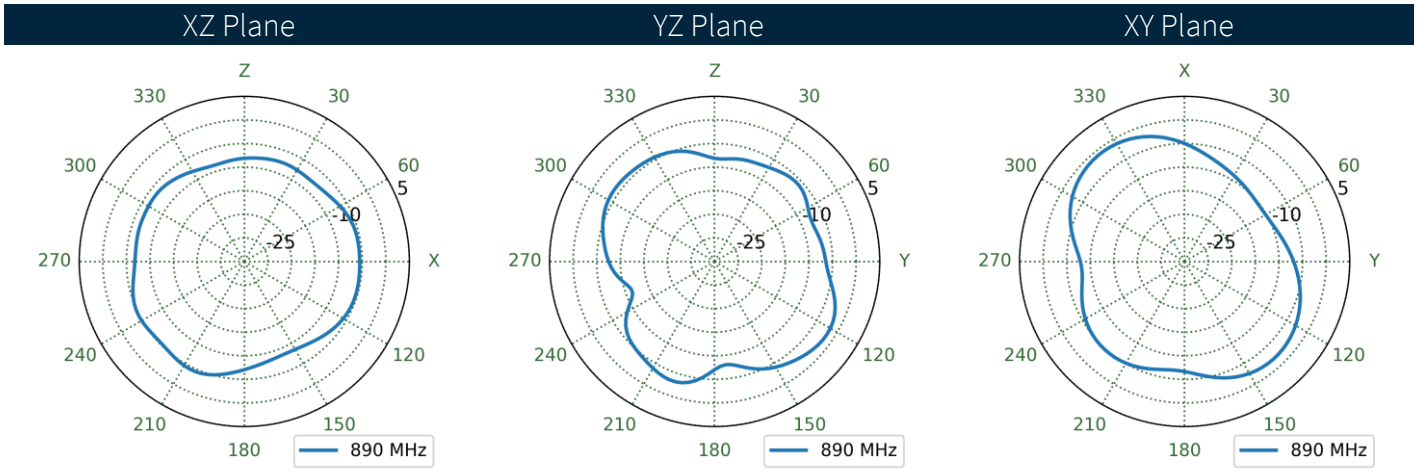

6.9 Cable Feed Right Patterns at 890 MHz

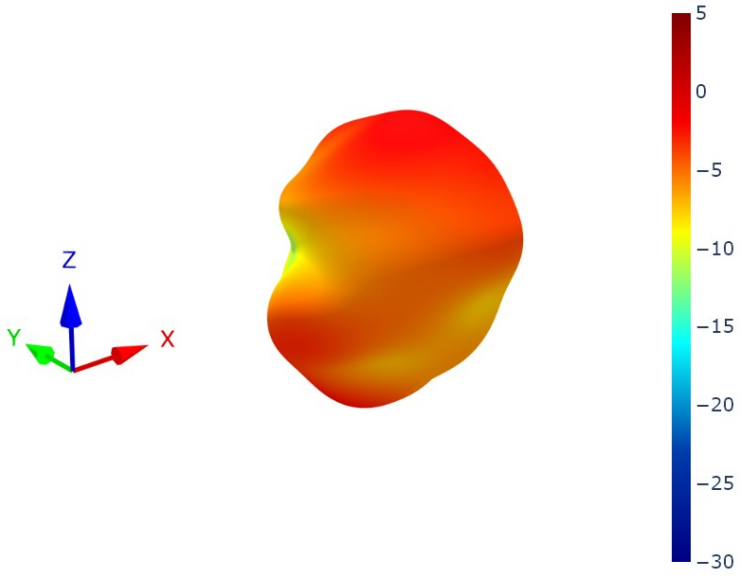

XZ Plane	YZ Plane	XY Plane

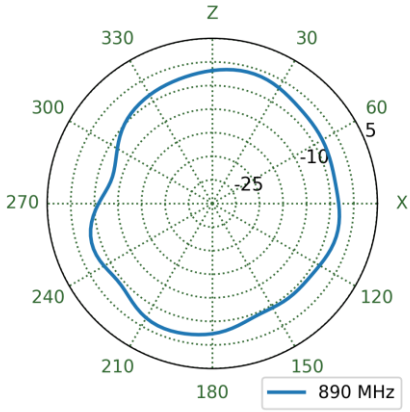

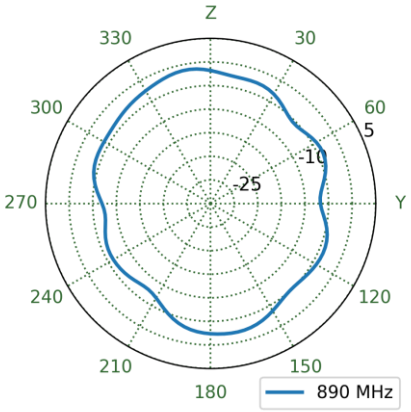

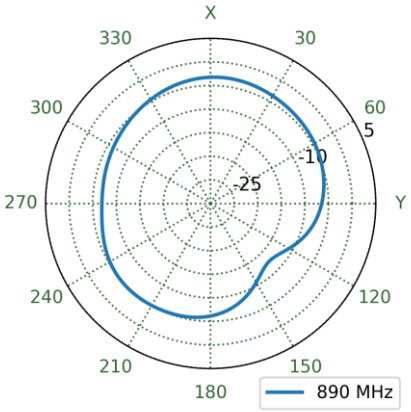

6.10 Cable Feed Straight Patterns at 890 MHz

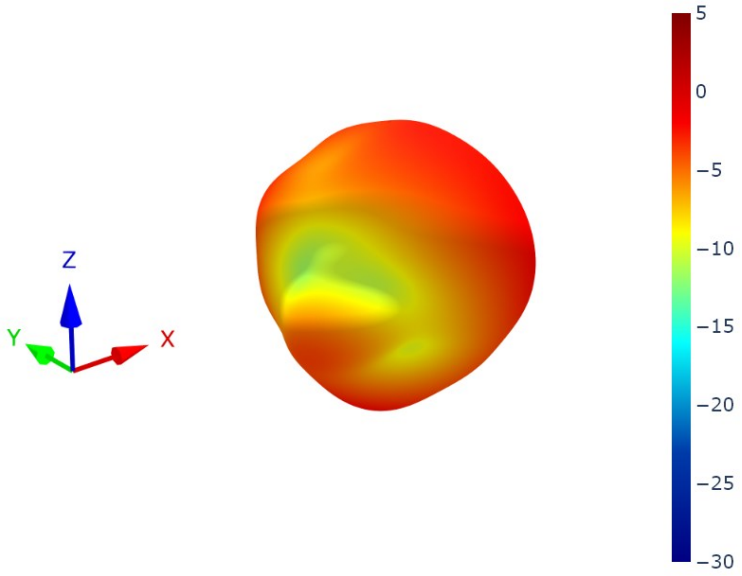

XZ Plane	YZ Plane	XY Plane

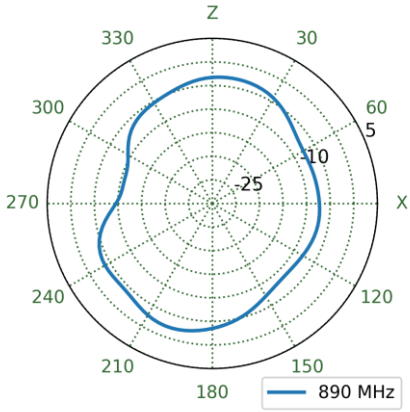

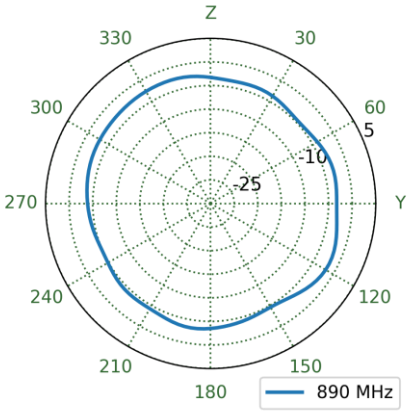

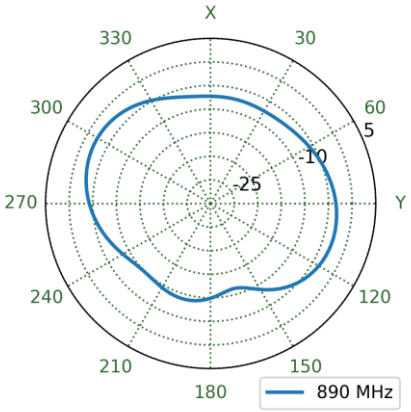

6.11 Cable Feed Left Patterns at 1470 MHz

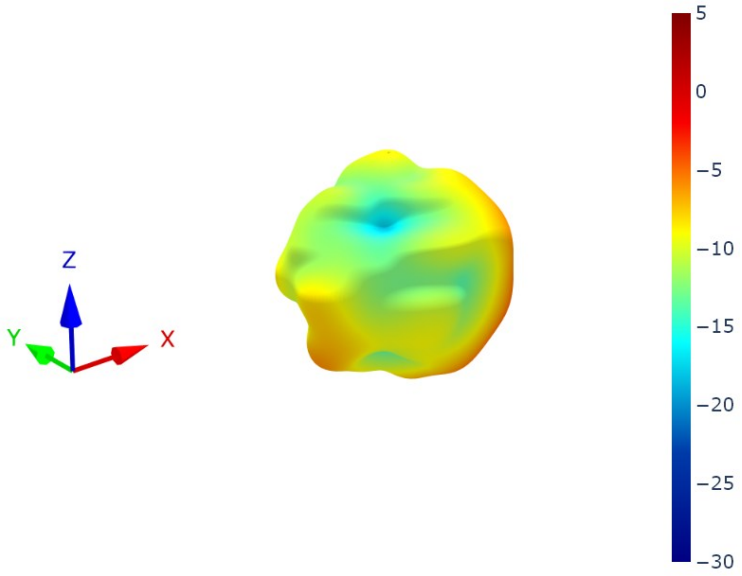

XZ Plane	YZ Plane	XY Plane

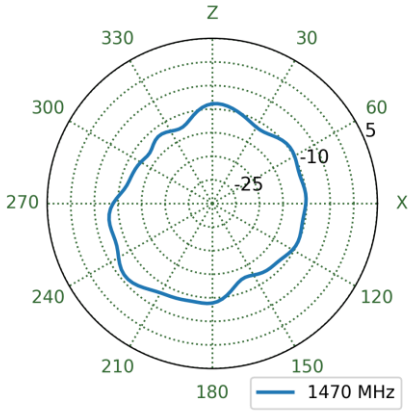

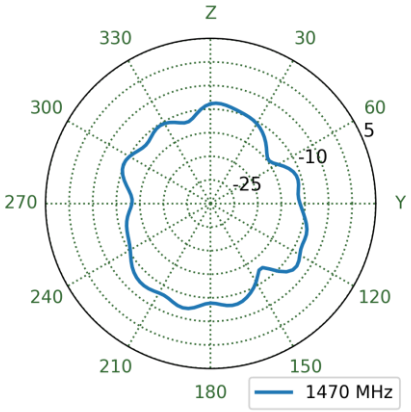

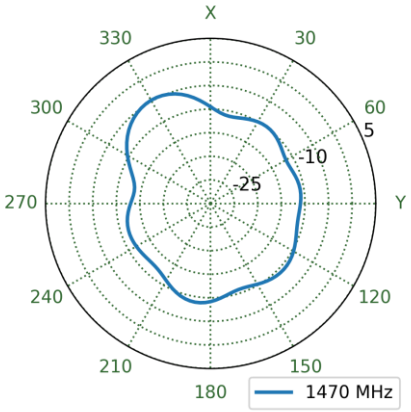

6.12 Cable Feed Right Patterns at 1470 MHz

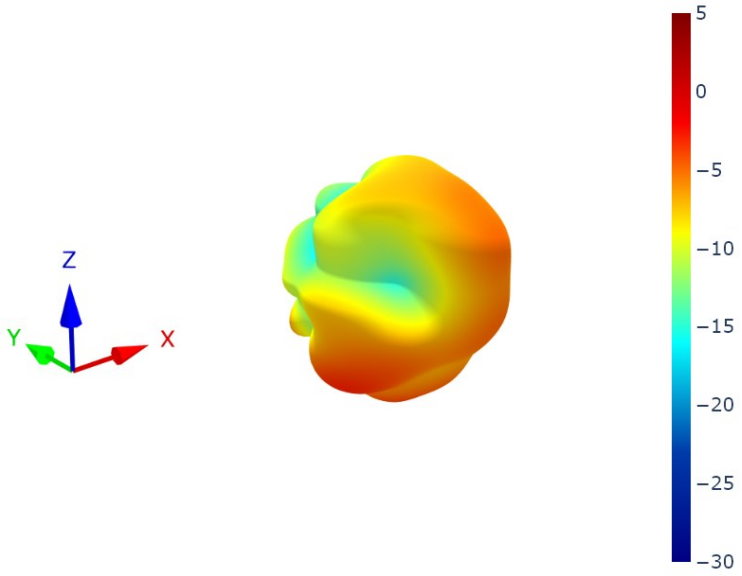

XZ Plane	YZ Plane	XY Plane

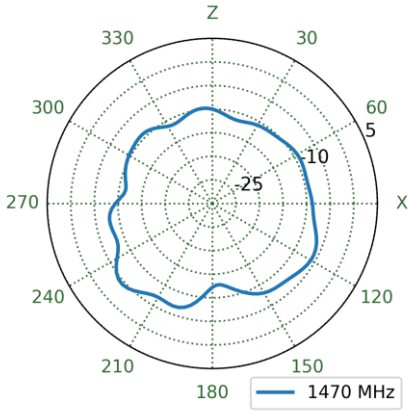

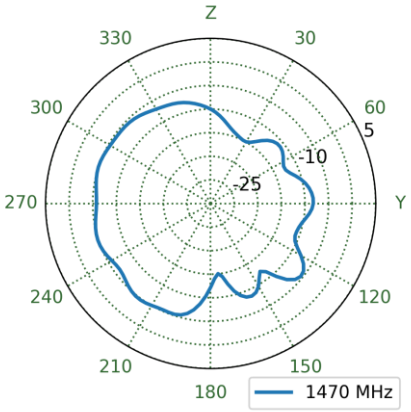

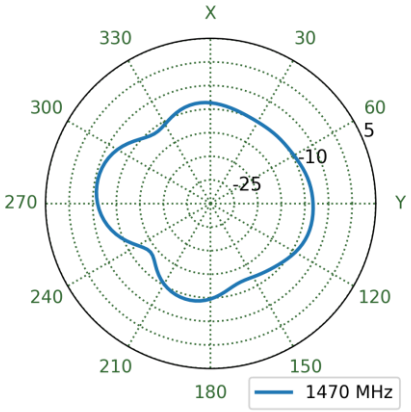

6.13 Cable Feed Straight Patterns at 1470 MHz

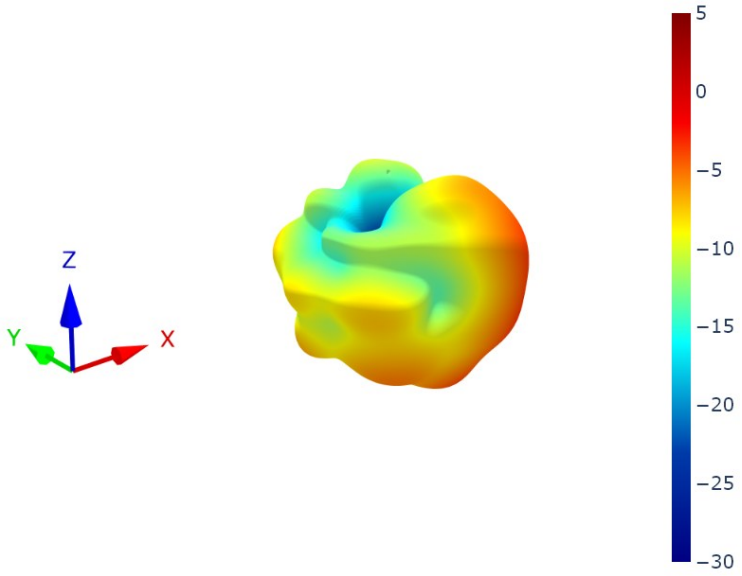

XZ Plane	YZ Plane	XY Plane

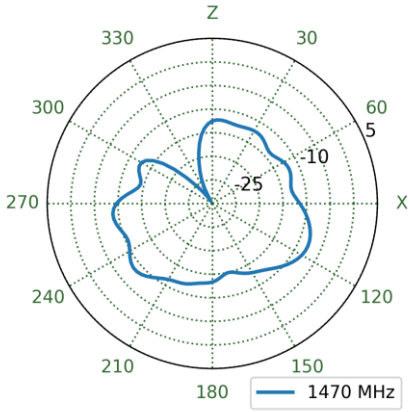

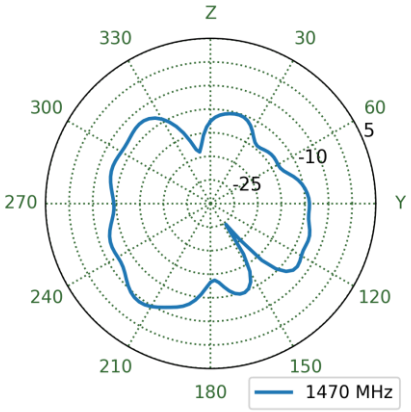

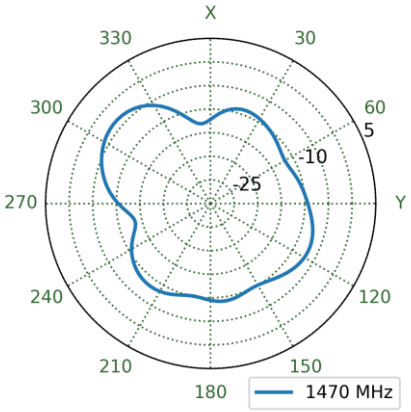

6.14 Cable Feed Left Patterns at 1805 MHz

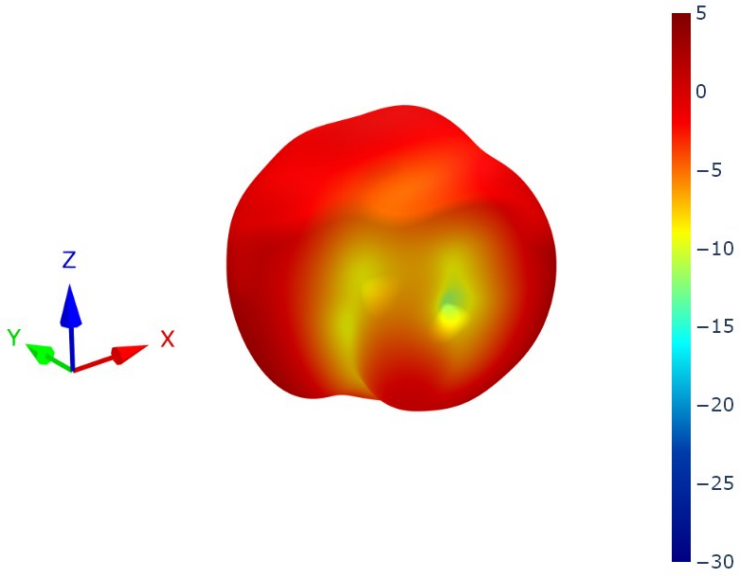

XZ Plane	YZ Plane	XY Plane

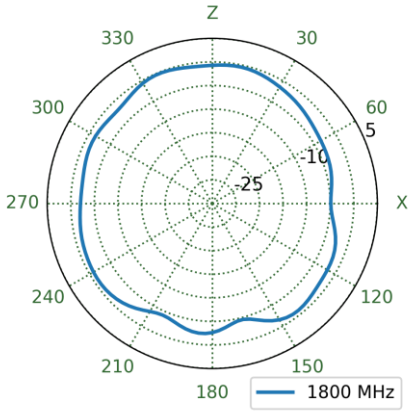

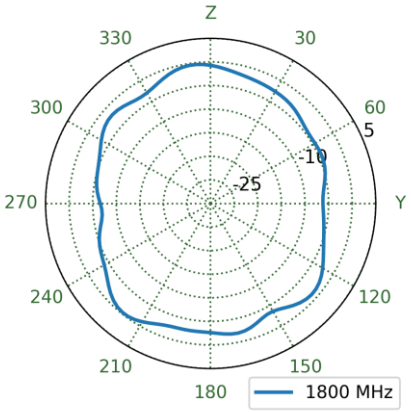

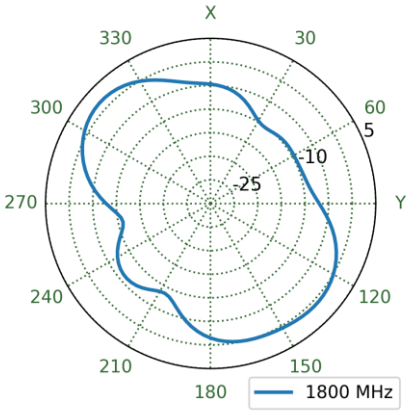

6.15 Cable Feed Right Patterns at 1805 MHz

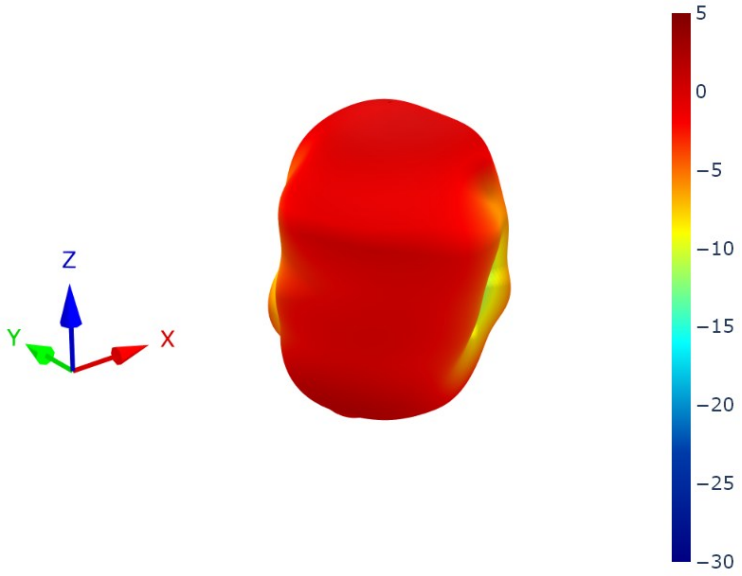

XZ Plane	YZ Plane	XY Plane

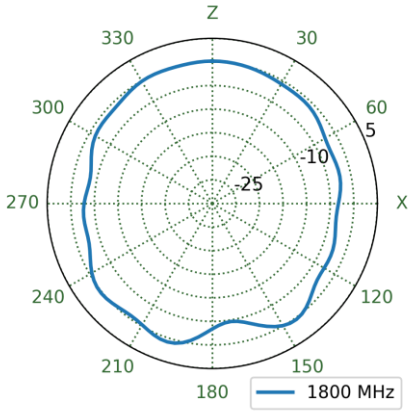

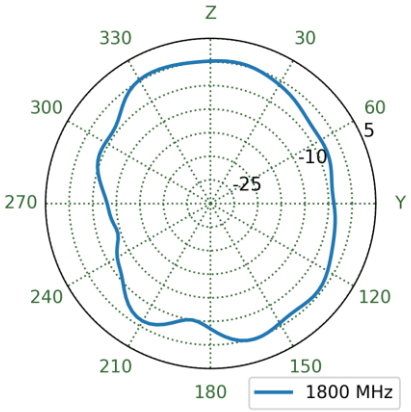

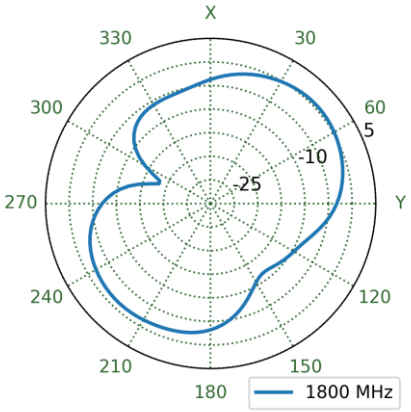

6.16 Cable Feed Straight Patterns at 1805 MHz

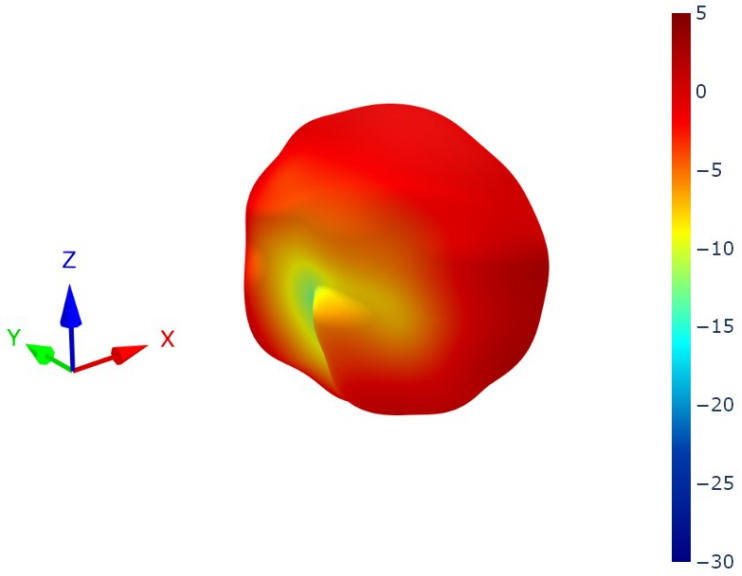

XZ Plane	YZ Plane	XY Plane

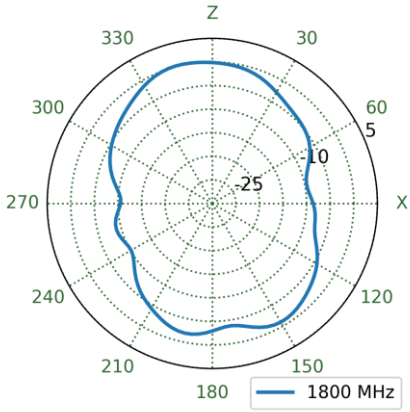

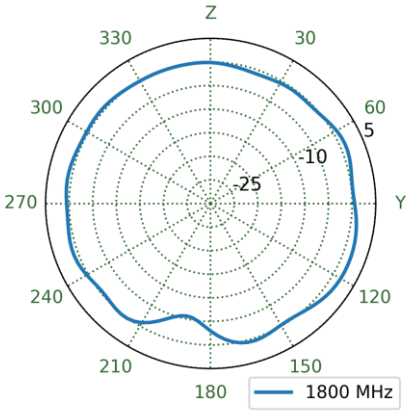

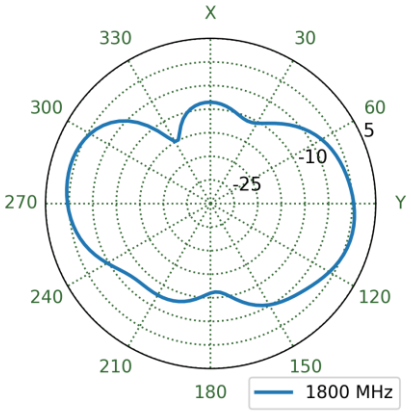

6.17 Cable Feed Left Patterns at 1920 MHz

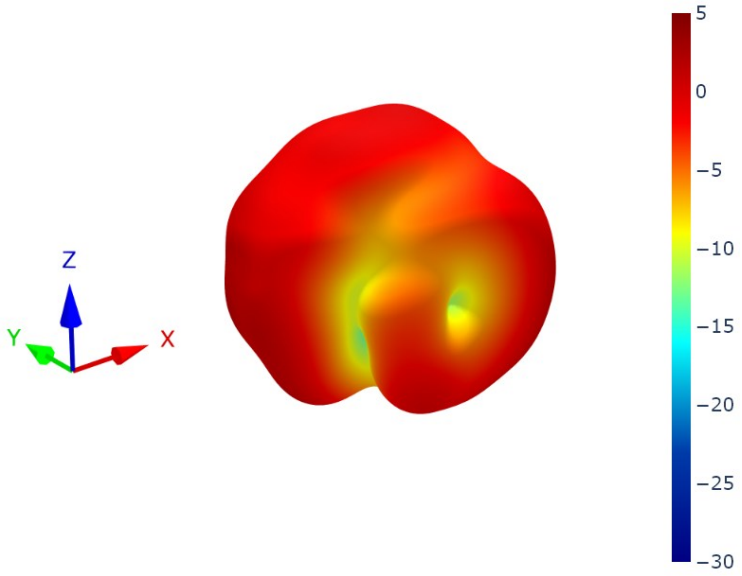

XZ Plane	YZ Plane	XY Plane

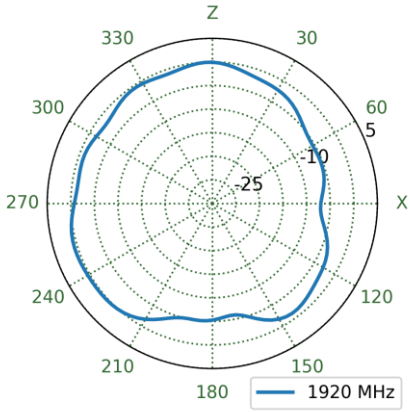

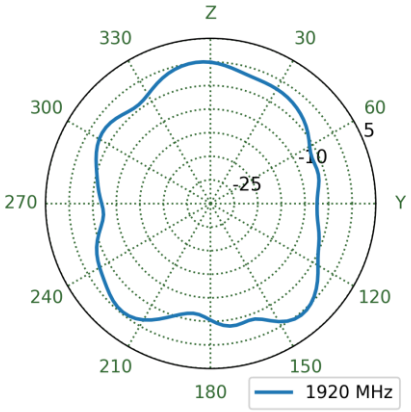

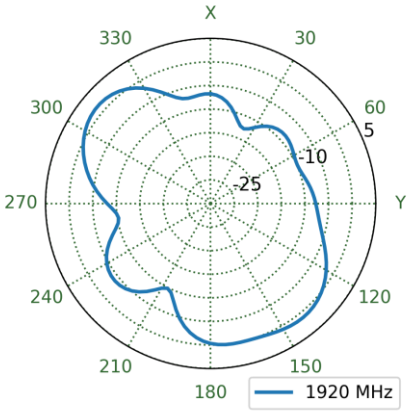

6.18 Cable Feed Right Patterns at 1920 MHz

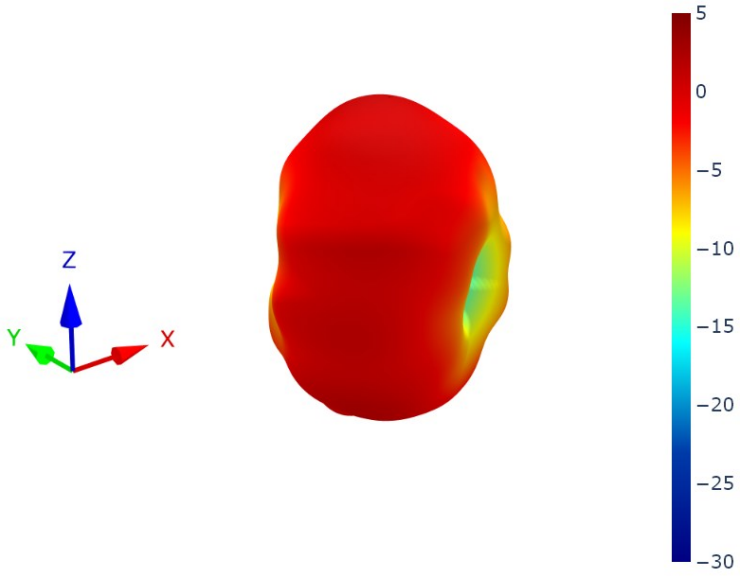

XZ Plane	YZ Plane	XY Plane

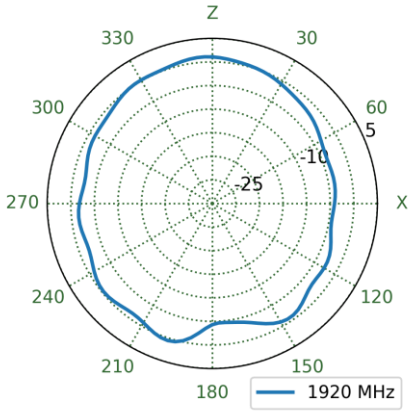

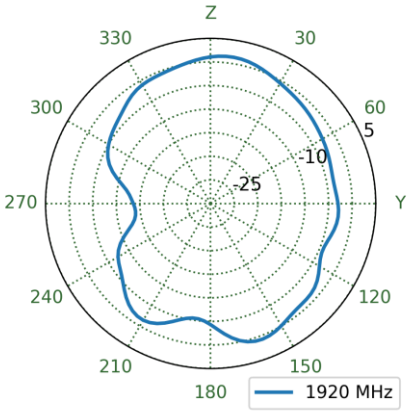

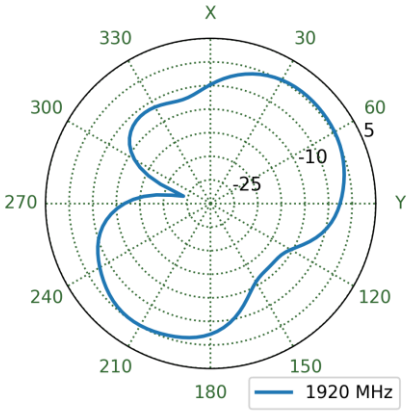

6.19 Cable Feed Straight Patterns at 1920 MHz

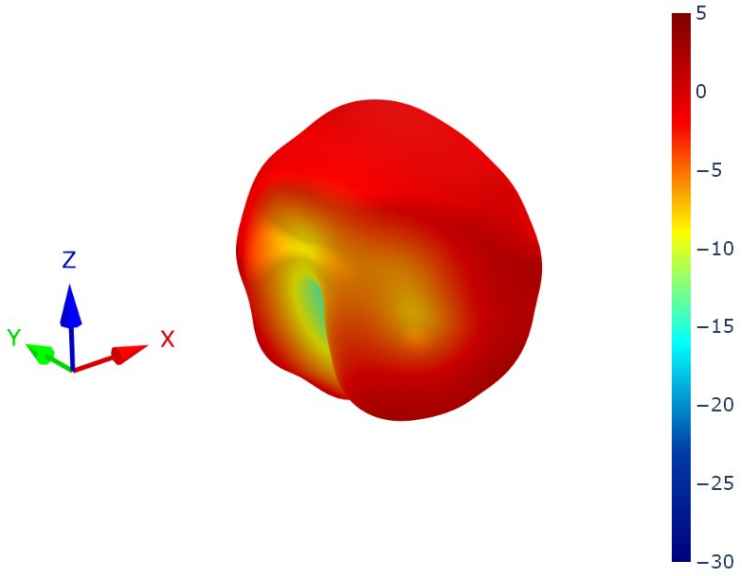

XZ Plane	YZ Plane	XY Plane

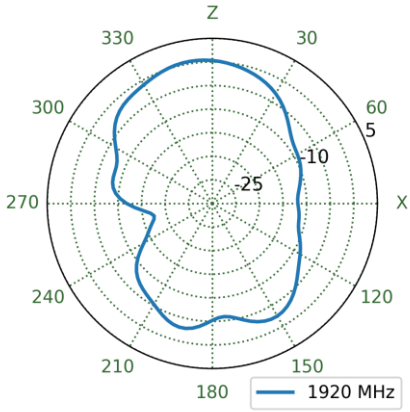

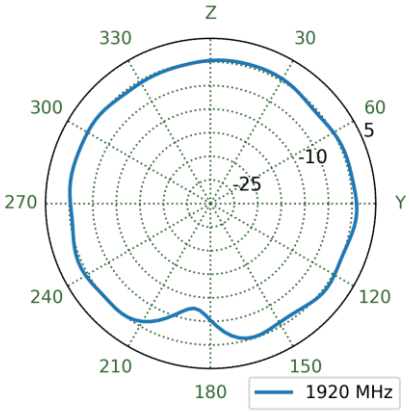

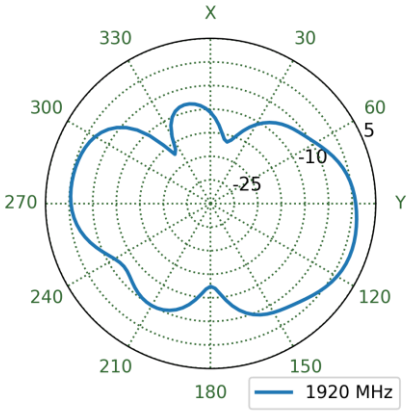

6.20 Cable Feed Left Patterns at 1990 MHz

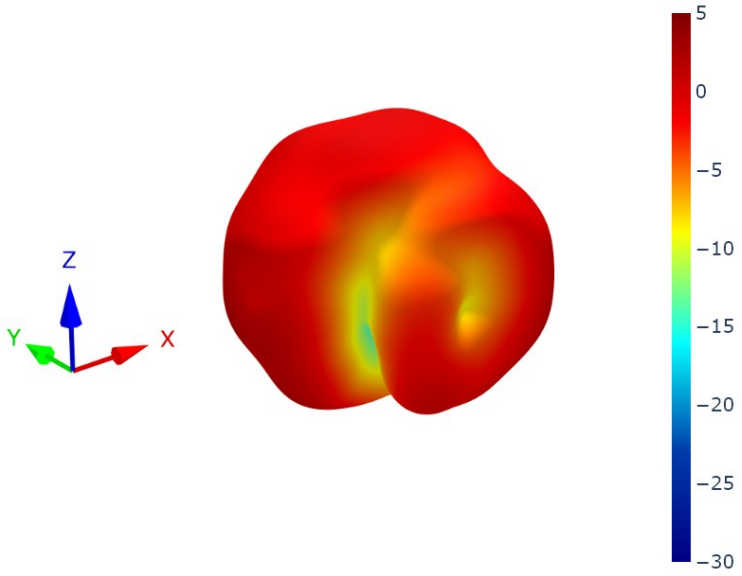

XZ Plane	YZ Plane	XY Plane

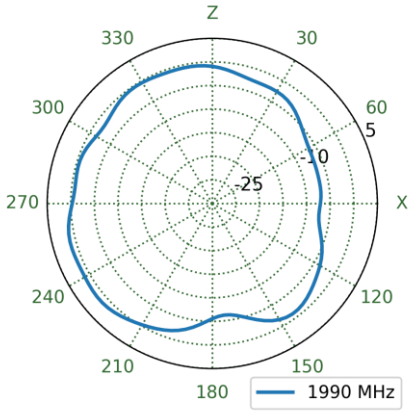

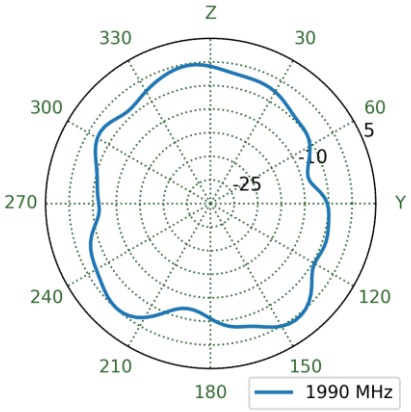

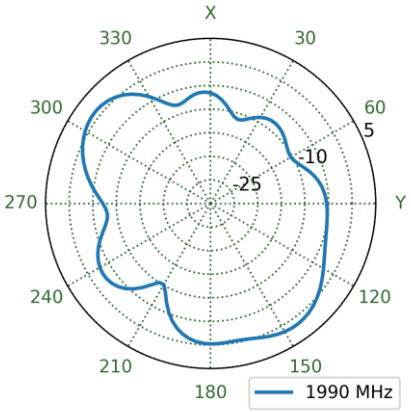

6.21 Cable Feed Right Patterns at 1990 MHz

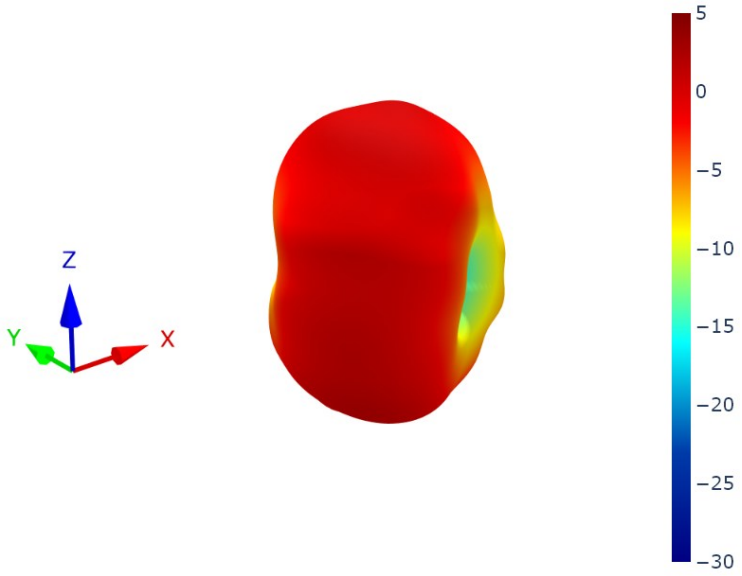

XZ Plane	YZ Plane	XY Plane

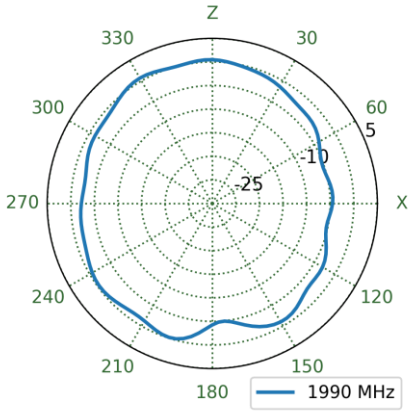

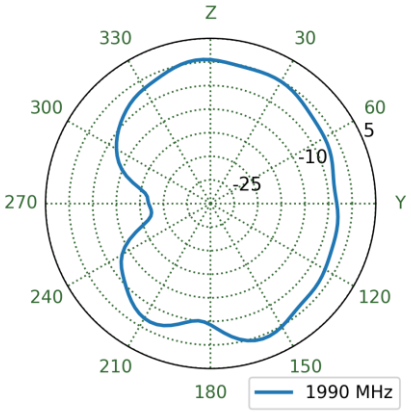

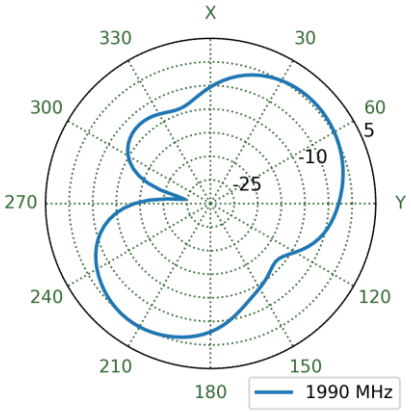

6.22 Cable Feed Straight Patterns at 1990 MHz

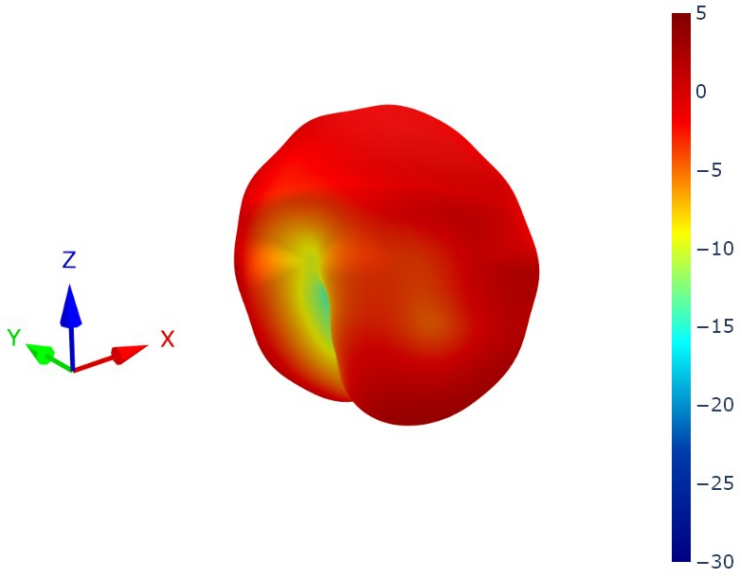

XZ Plane	YZ Plane	XY Plane

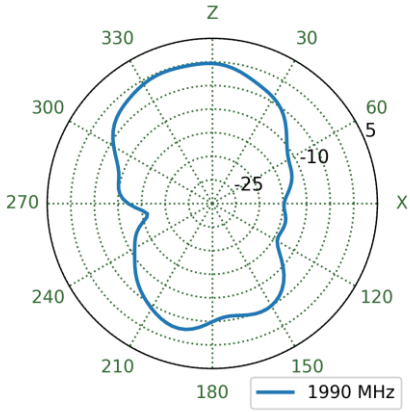

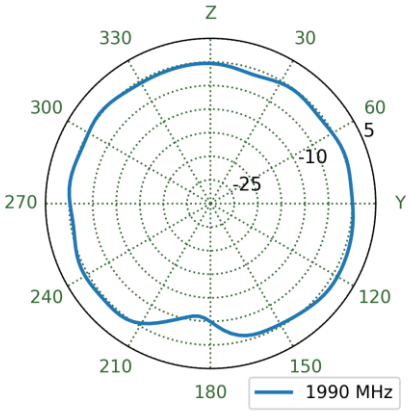

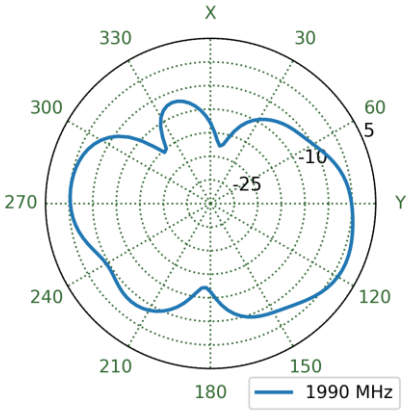

6.23 Cable Feed Left Patterns at 2360 MHz

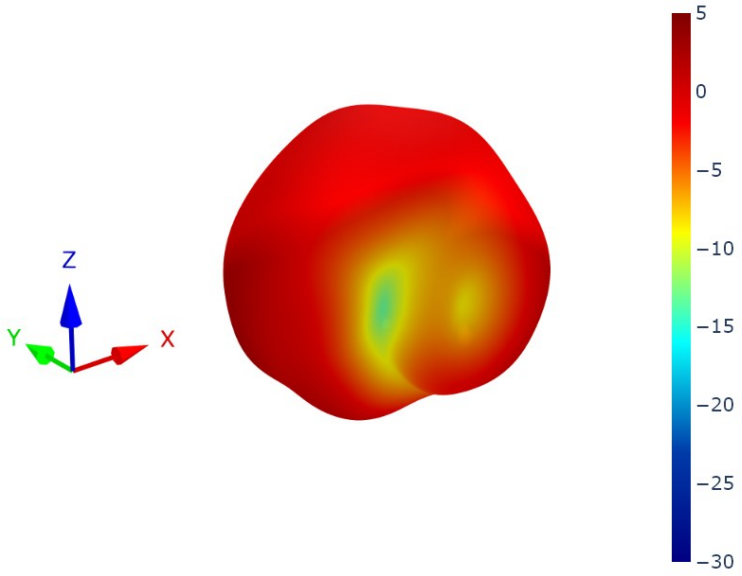

XZ Plane	YZ Plane	XY Plane

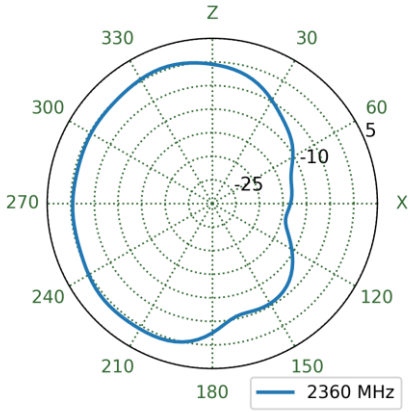

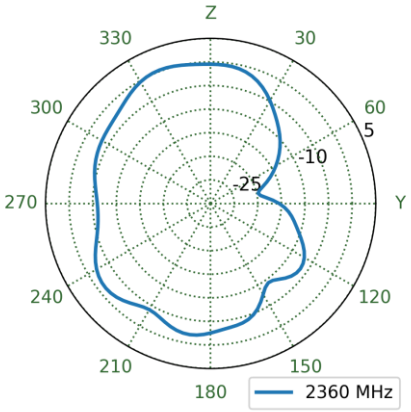

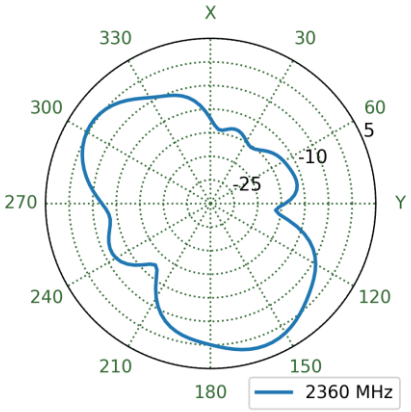

6.24 Cable Feed Right Patterns at 2360 MHz

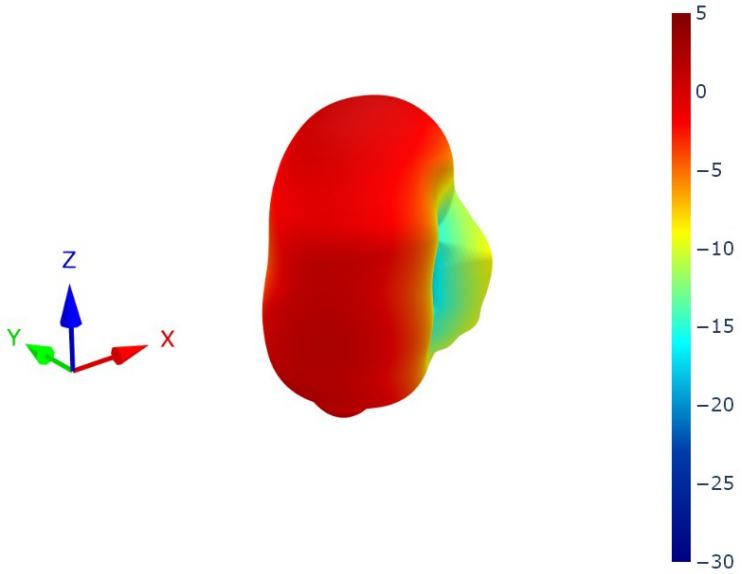

XZ Plane	YZ Plane	XY Plane

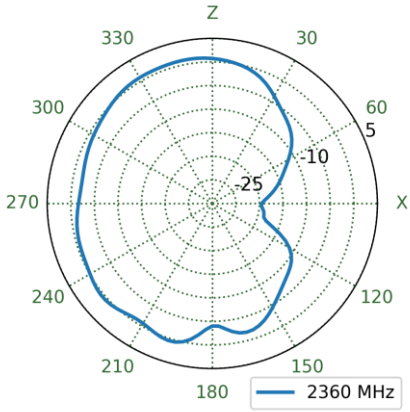

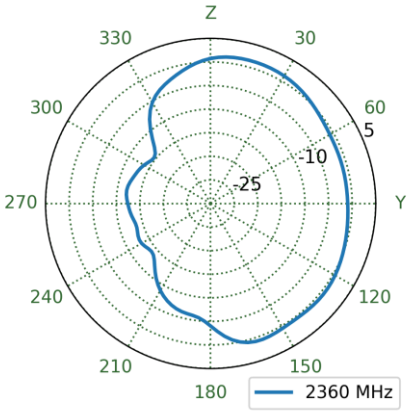

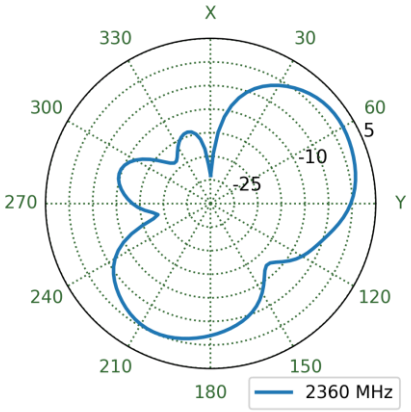

6.25 Cable Feed Straight Patterns at 2360 MHz

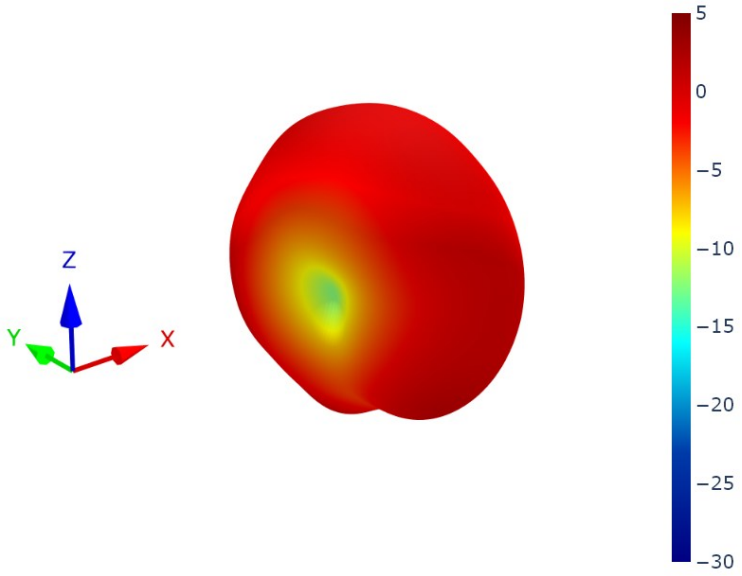

XZ Plane	YZ Plane	XY Plane

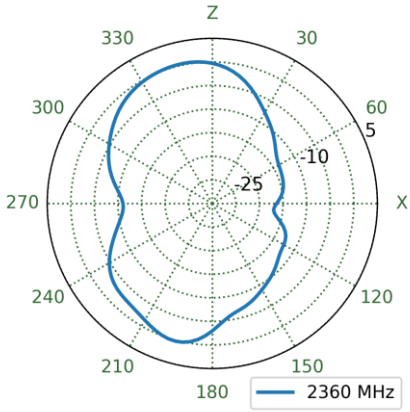

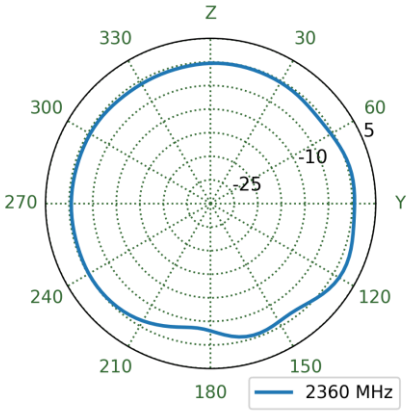

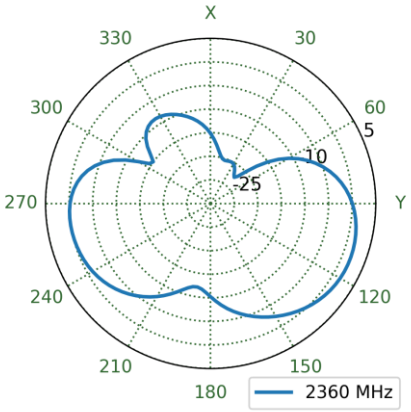

6.26 Cable Feed Left Patterns at 2595 MHz

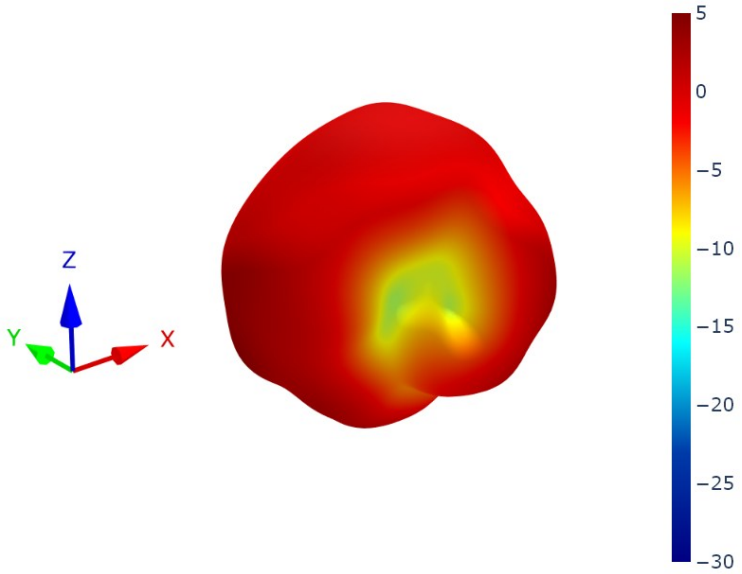

XZ Plane	YZ Plane	XY Plane

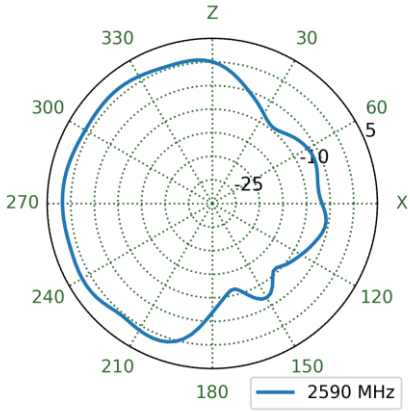

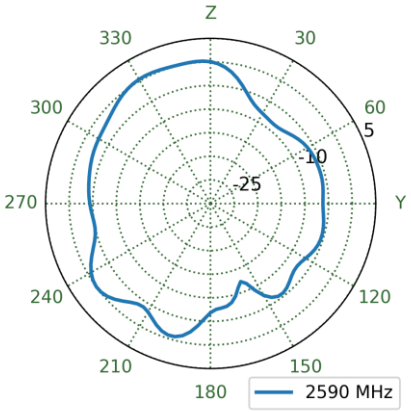

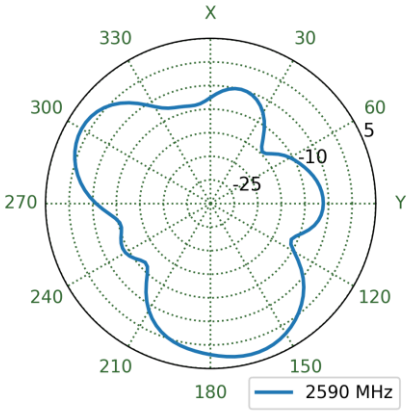

6.27 Cable Feed Right Patterns at 2595 MHz

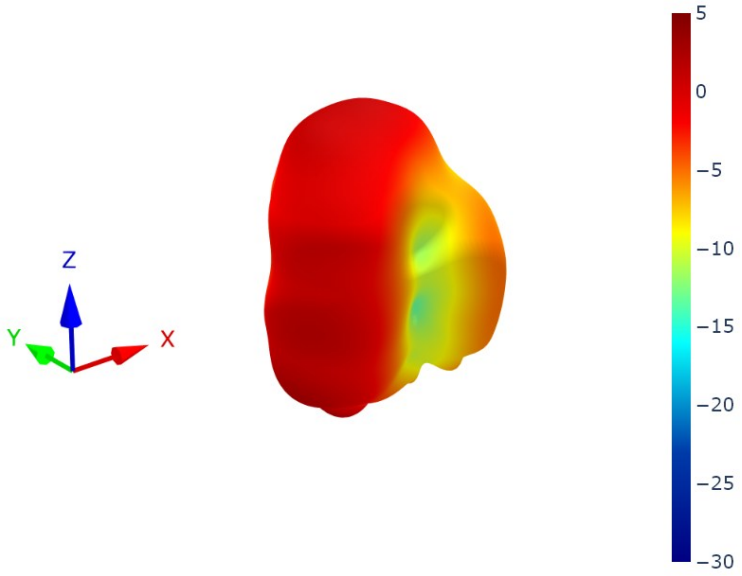

XZ Plane	YZ Plane	XY Plane

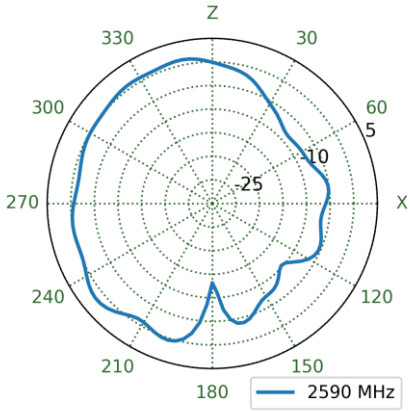

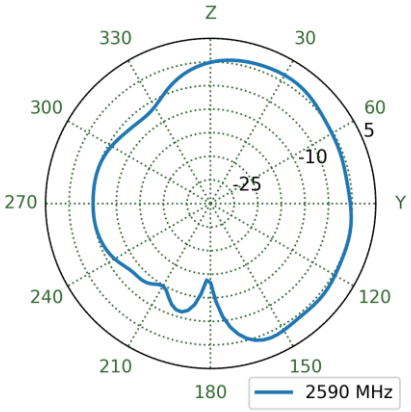

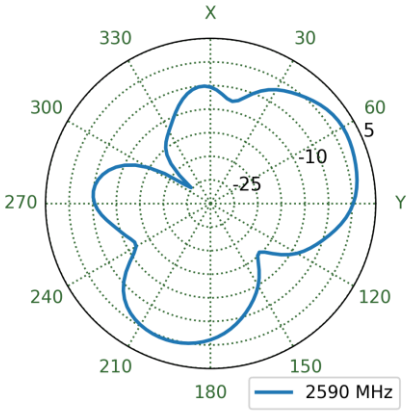

6.28 Cable Feed Straight Patterns at 2595 MHz

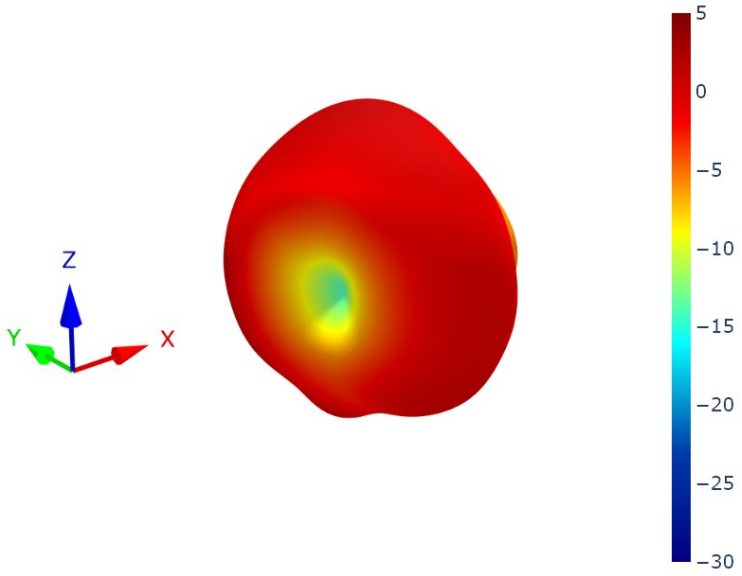

XZ Plane	YZ Plane	XY Plane

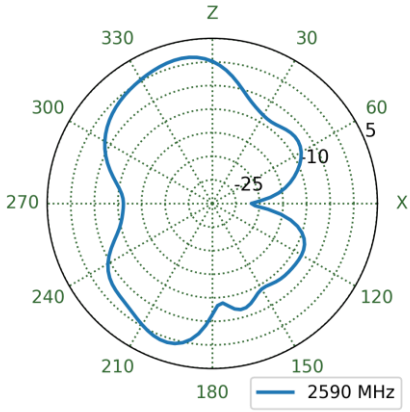

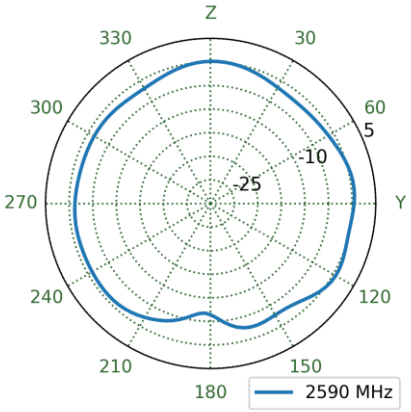

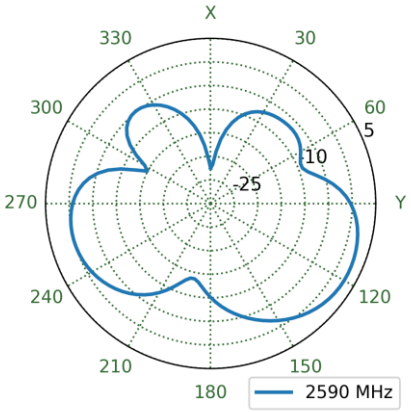

6.29 Cable Feed Left Patterns at 3550 MHz

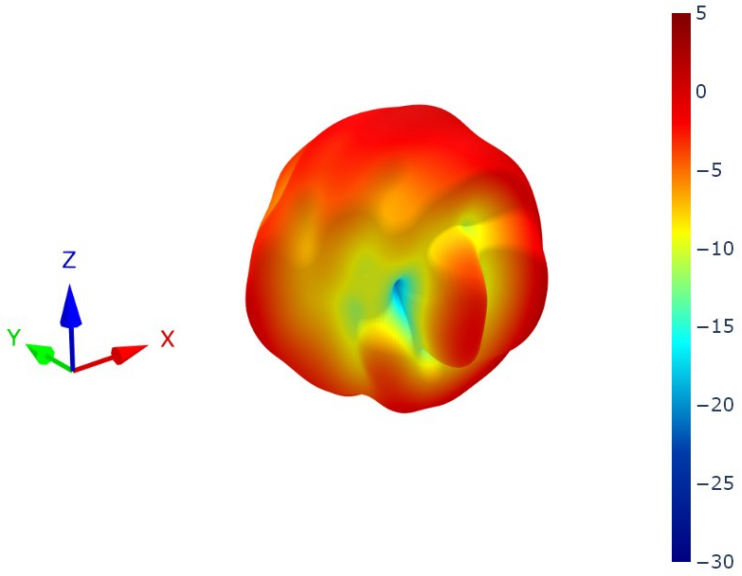

XZ Plane	YZ Plane	XY Plane

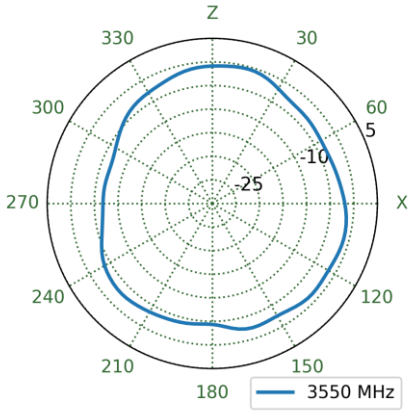

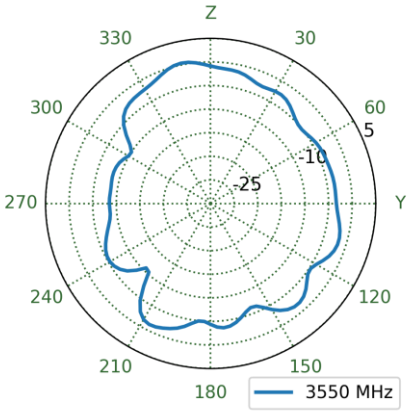

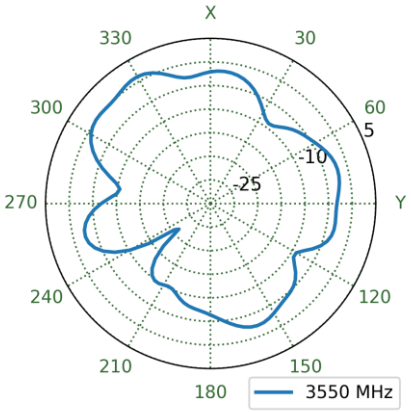

6.30 Cable Feed Right Patterns at 3550 MHz

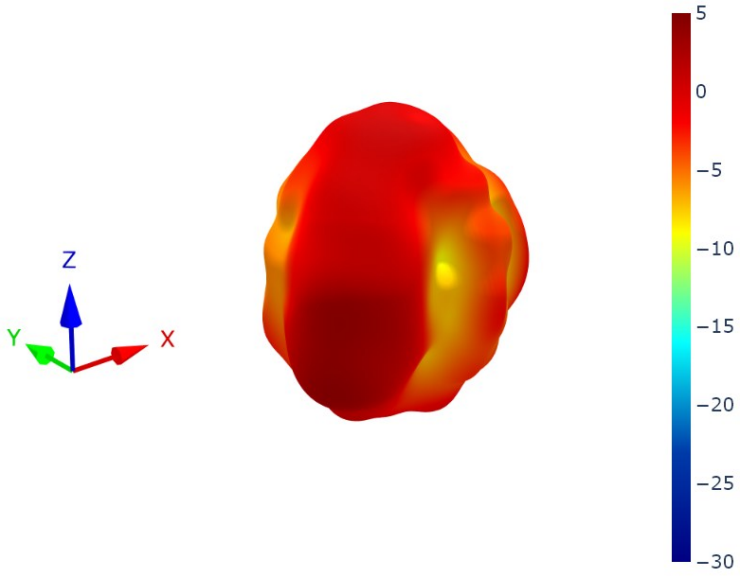

XZ Plane	YZ Plane	XY Plane

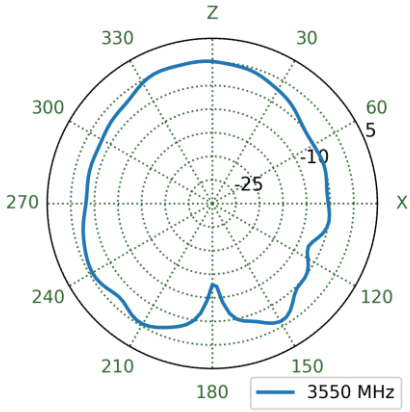

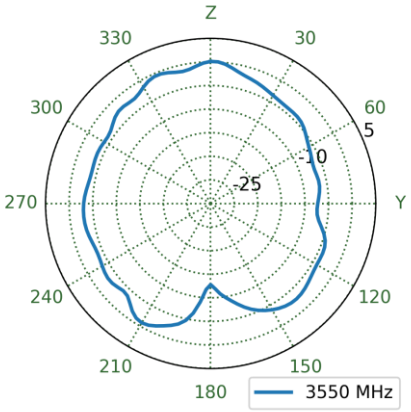

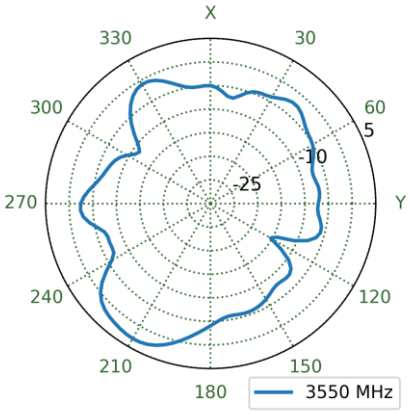

6.31 Cable Feed Straight Patterns at 3550 MHz

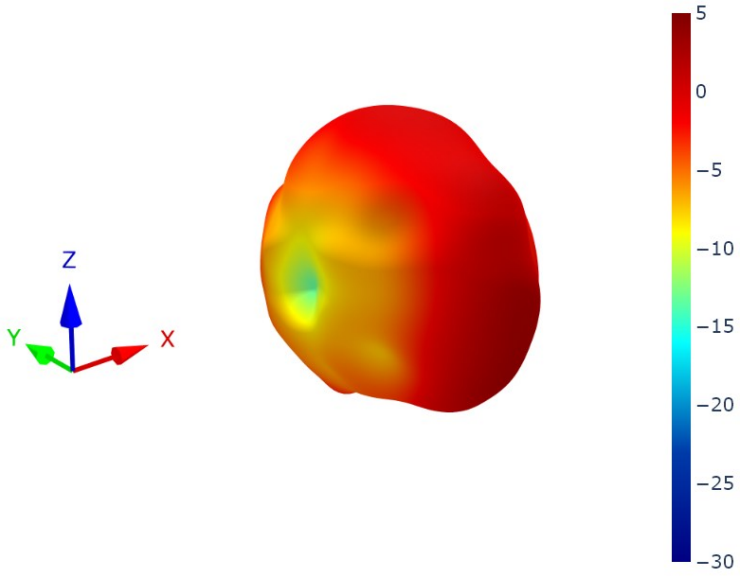

XZ Plane	YZ Plane	XY Plane

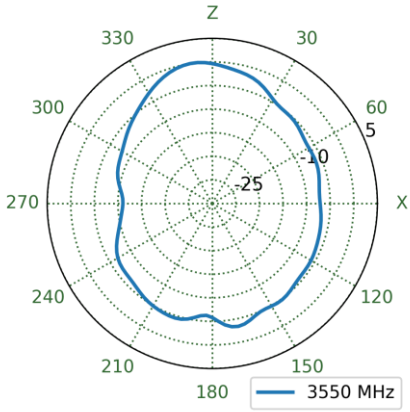

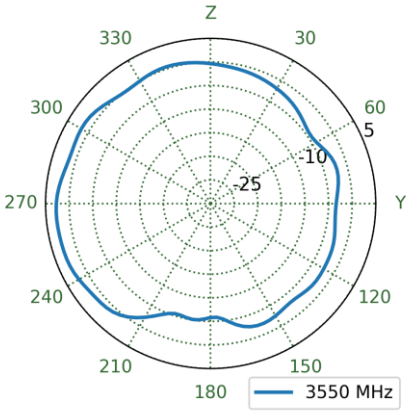

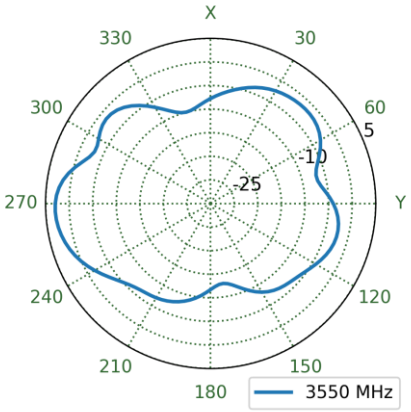

6.32 Cable Feed Left Patterns at 4600 MHz

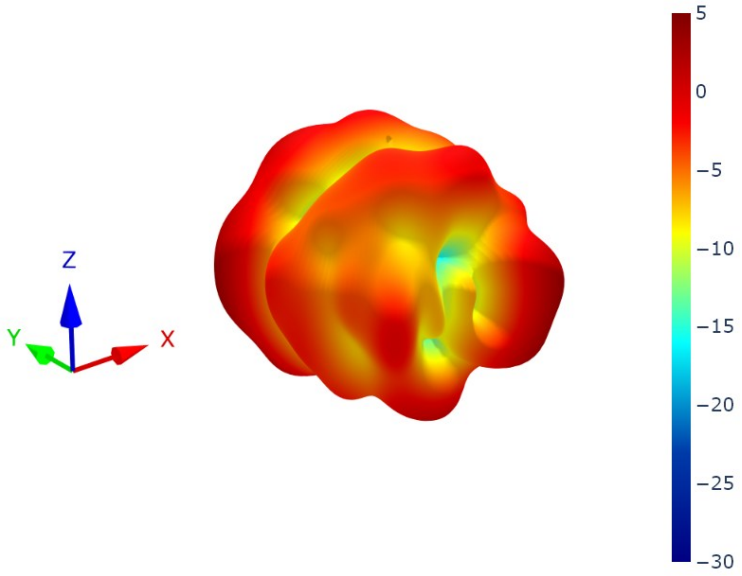

XZ Plane	YZ Plane	XY Plane

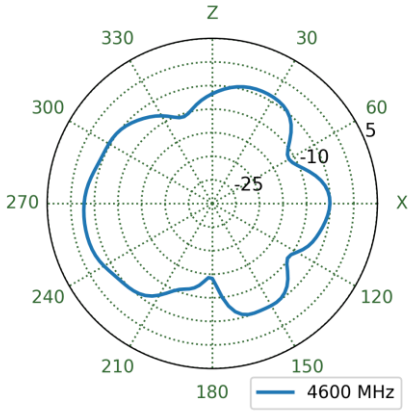

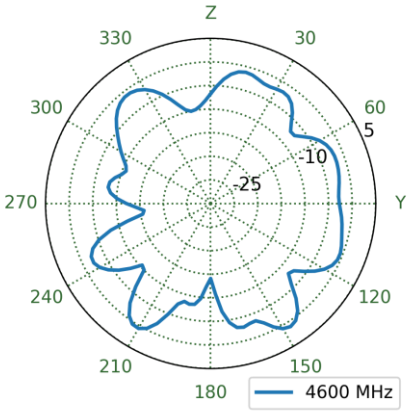

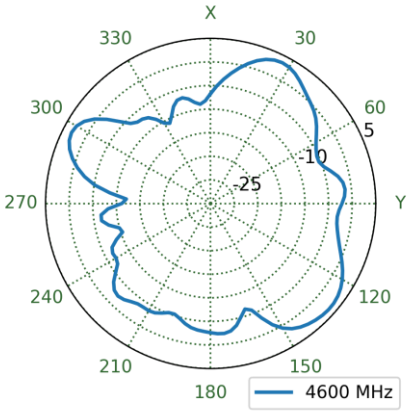

6.33 Cable Feed Right Patterns at 4600 MHz

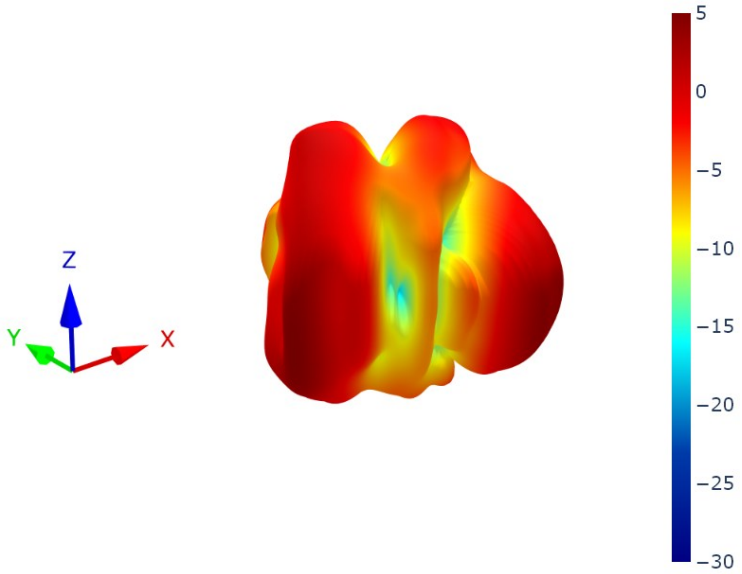

XZ Plane	YZ Plane	XY Plane

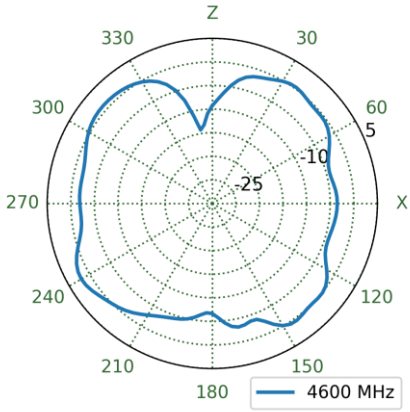

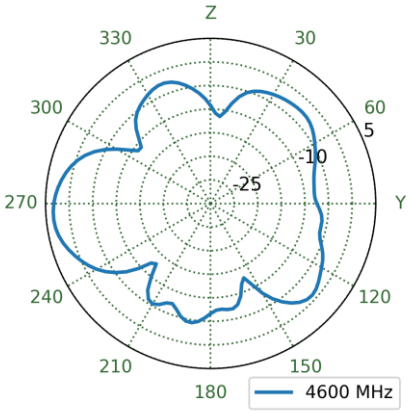

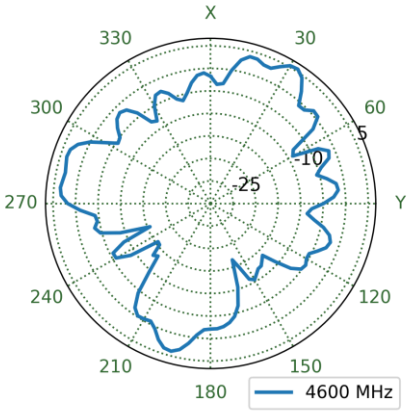

6.34 Cable Feed Straight Patterns at 4600 MHz

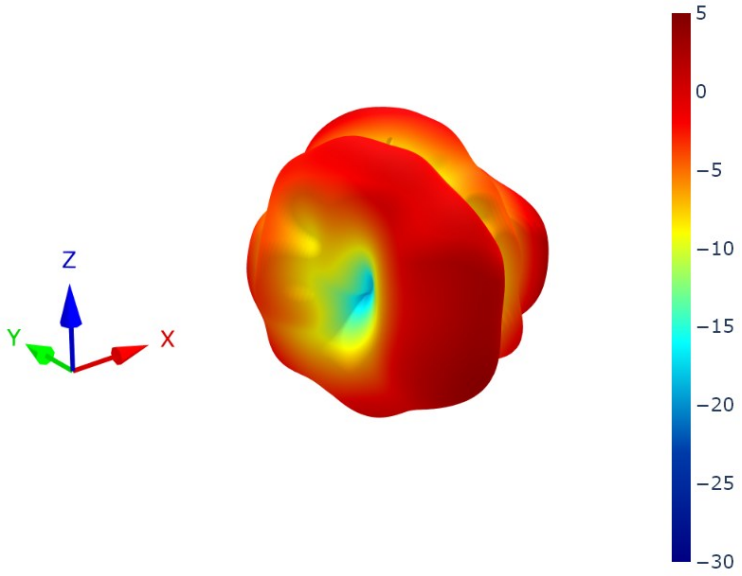

XZ Plane	YZ Plane	XY Plane

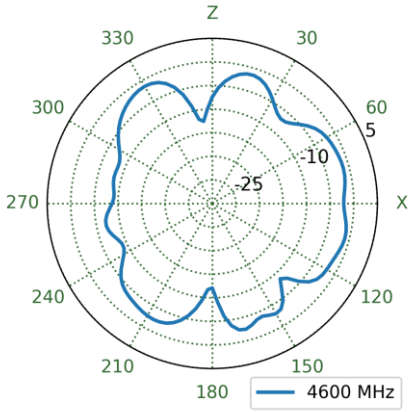

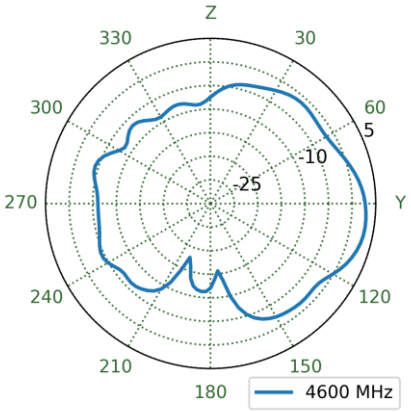

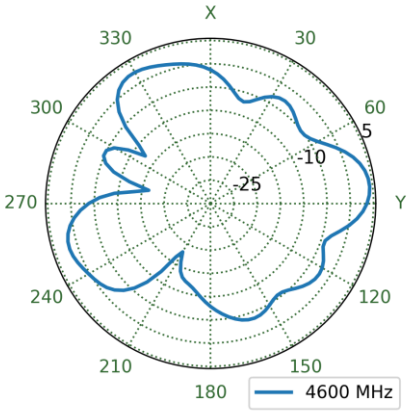

6.35 Cable Feed Left Patterns at 4800 MHz

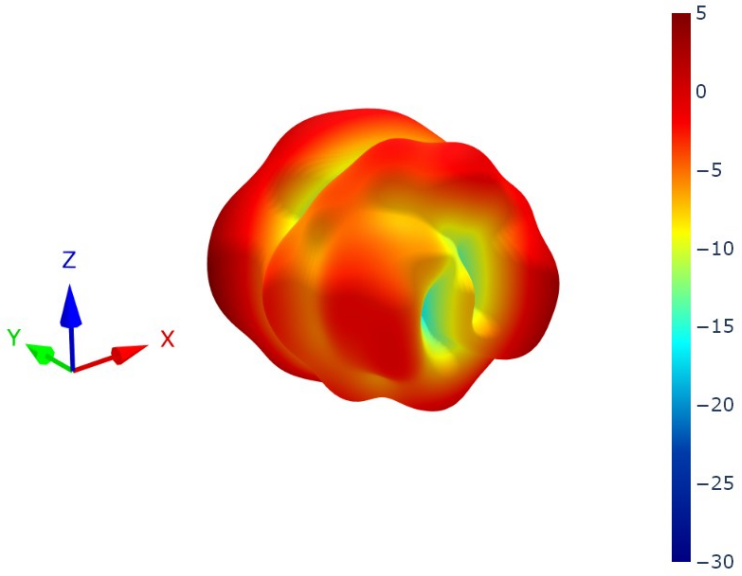

XZ Plane	YZ Plane	XY Plane

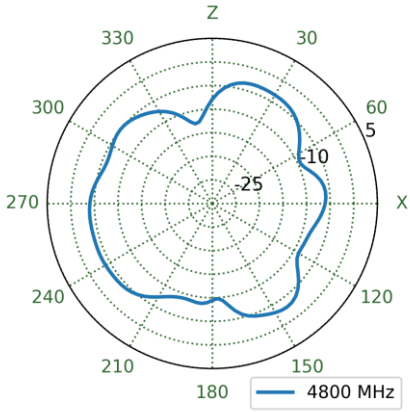

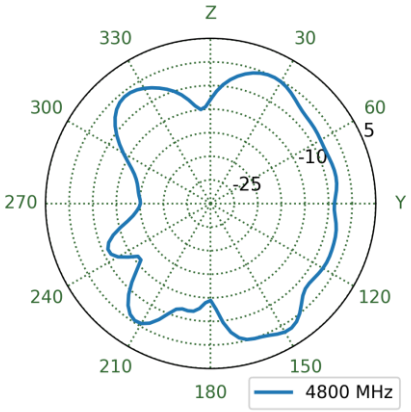

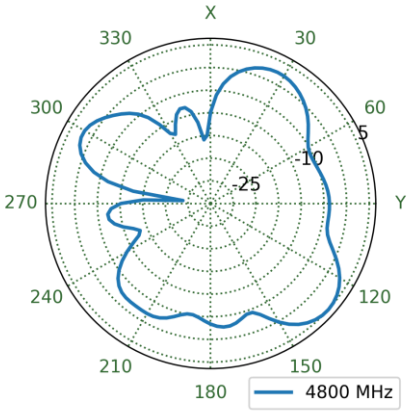

6.36 Cable Feed Right Patterns at 4800 MHz

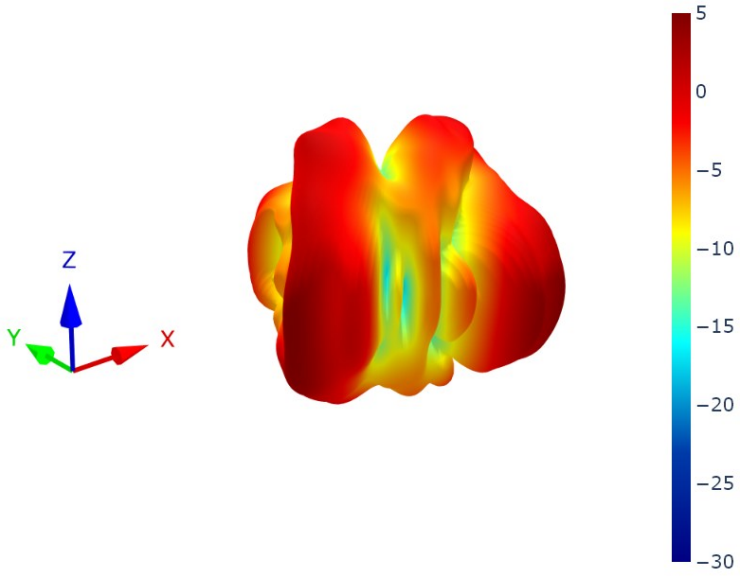

XZ Plane	YZ Plane	XY Plane

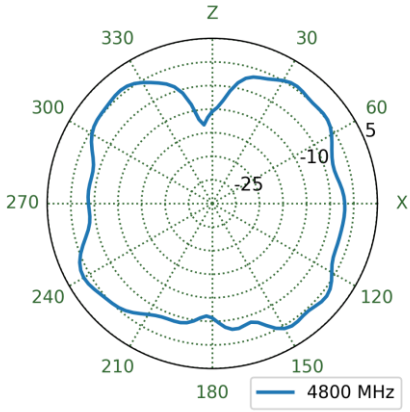

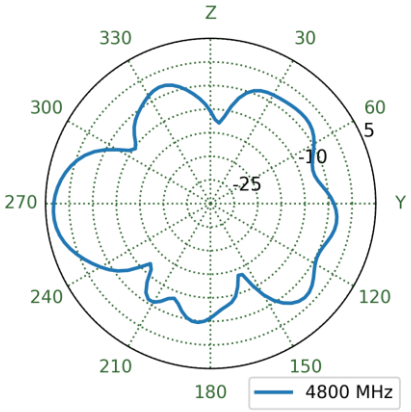

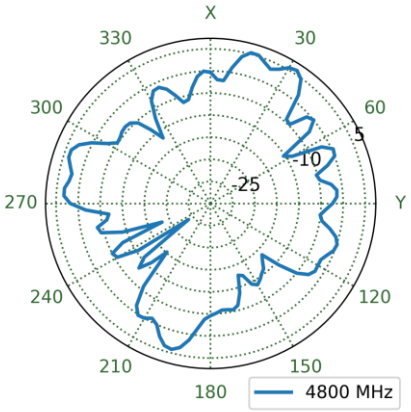

6.37 Cable Feed Straight Patterns at 4800 MHz

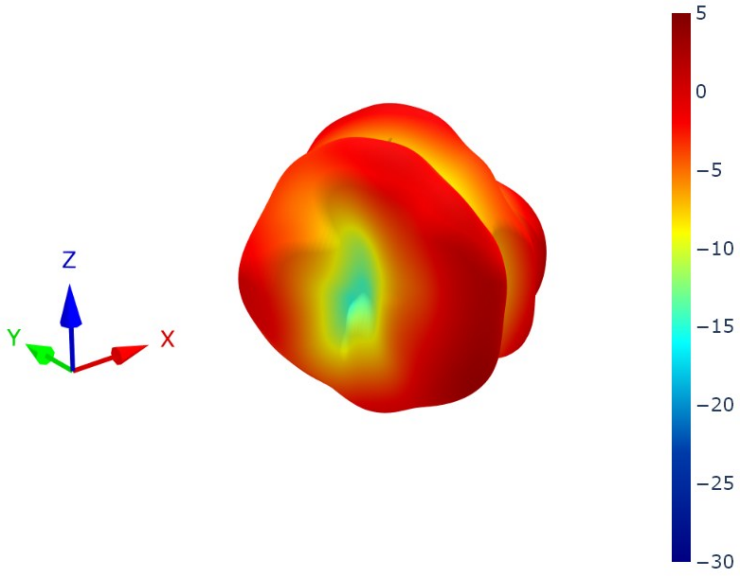

XZ Plane	YZ Plane	XY Plane

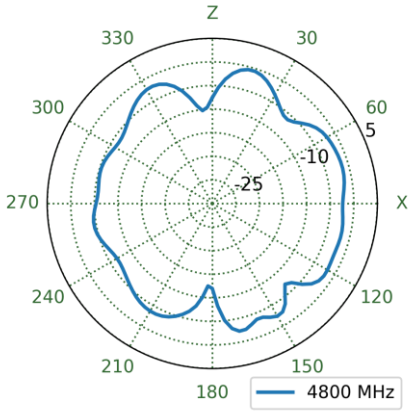

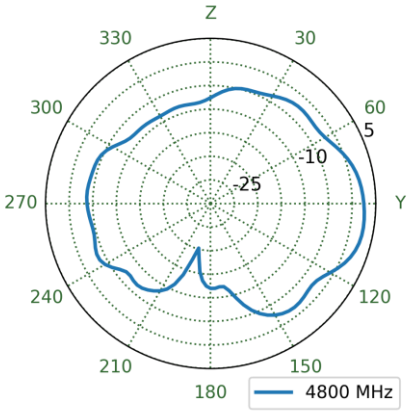

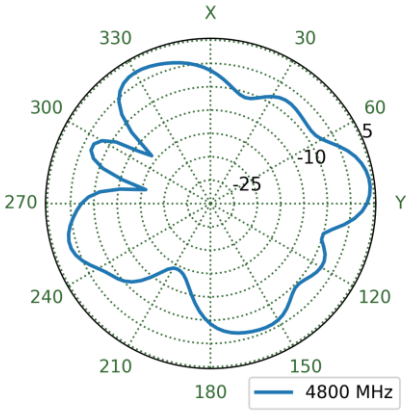

6.38 Cable Feed Left Patterns at 5530 MHz

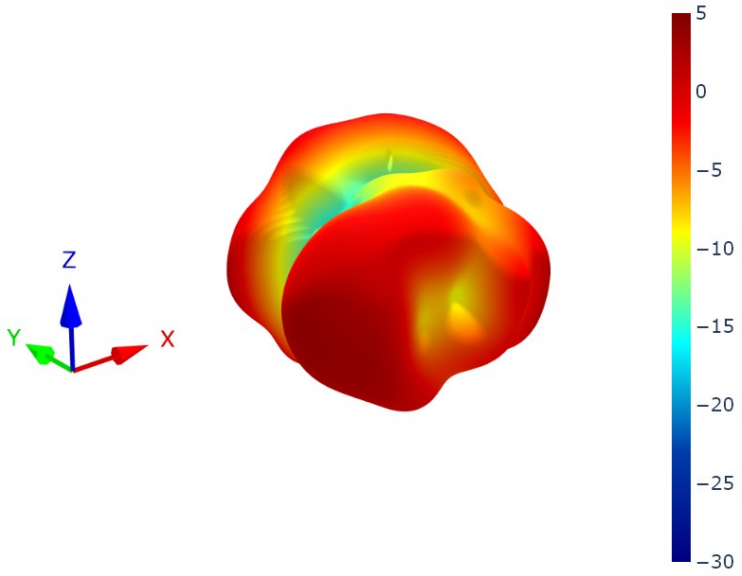

XZ Plane	YZ Plane	XY Plane

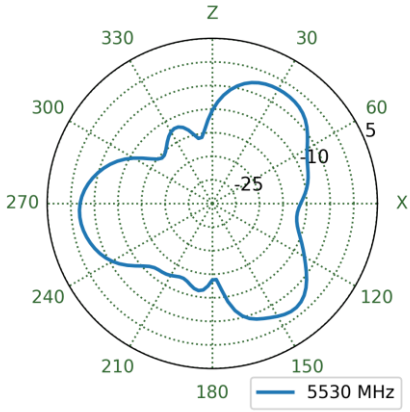

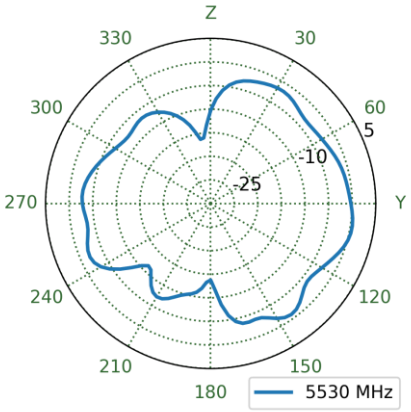

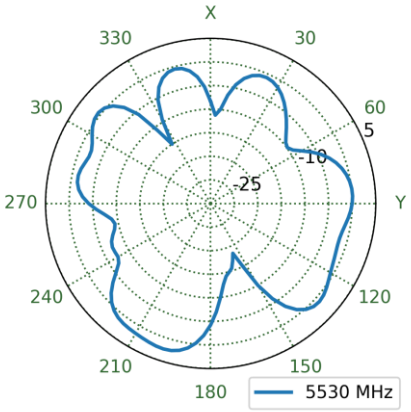

6.39 Cable Feed Right Patterns at 5530 MHz

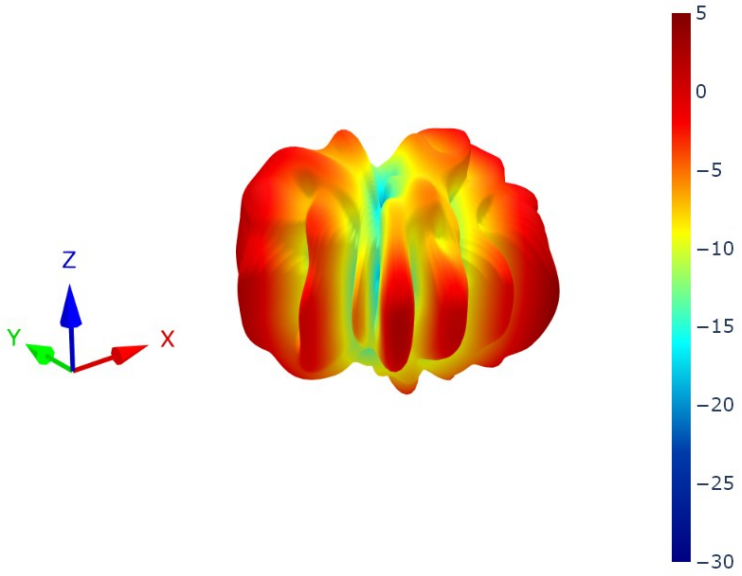

XZ Plane	YZ Plane	XY Plane

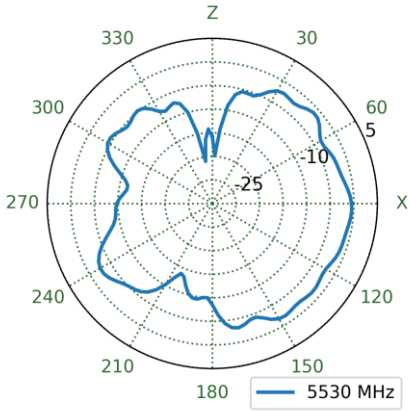

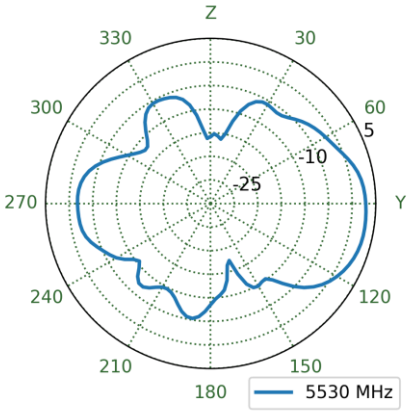

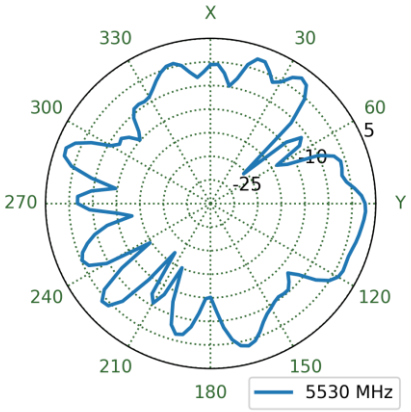

6.40 Cable Feed Straight Patterns at 5530 MHz

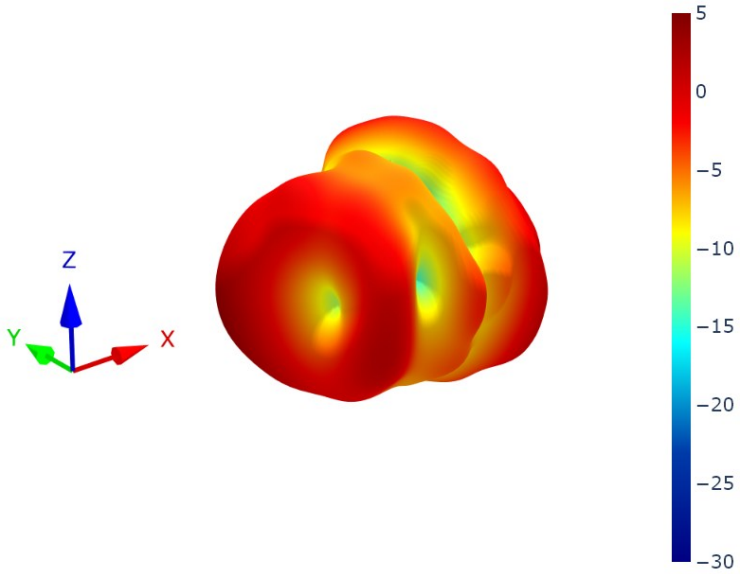

XZ Plane	YZ Plane	XY Plane

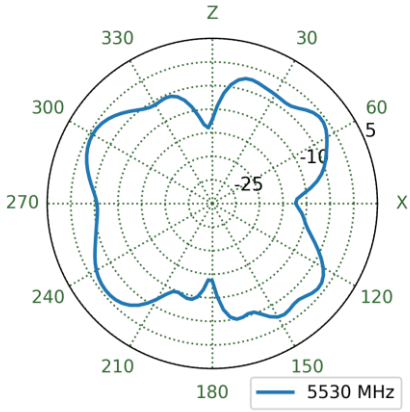

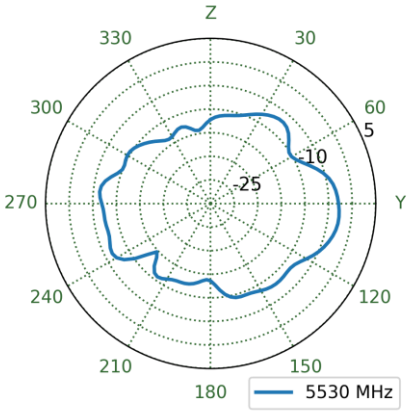

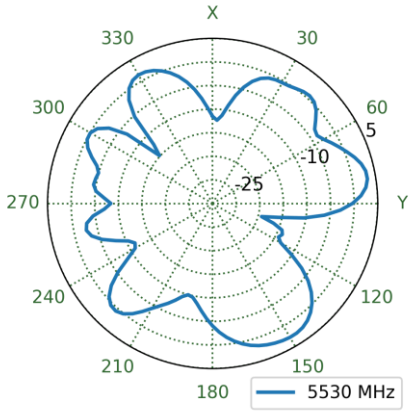

Changelog for the datasheet

SPE-24-8-235 – FXUB16.07.0150AQ

Revision: A (Initial Release)	
Date:	2024-09-24
Notes:	Initial Datasheet Release
Author:	Gary West

Previous Revisions

TAOGLAS

TAOGLAS®

www.taoglas.com