

Customer Information Sheet

IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

TABLE 1: CONFIGURATIONS & BILL OF MATERIALS

ORDER CODE CONFIGURATIONS										BOM ITEM No.		
										1	2	3
G125-XXXXXXXX-XXXXL										CONNECTOR (SEE ORDER CODE FOR TOTAL No. OF CONTACTS)	PTFE WIRE (SEE C049XX FOR SPEC.)	CONNECTOR CONTACT (SEE ORDER CODE FOR QTY.)
G125	-	FC FD	1 2	XX	05 68	F0 F1 F2 F3 F5	-	XXXX	L	G125-224XX9600 G125-224XX96F1 G125-224XX96F2 G125-224XX96F3 G125-224XX96F5	STANDARD WHITE WIRE MULTI-COLOURED SEE TABLE 2 TWISTED PAIRS 2TPI: 26AWG = WHITE & RED 28AWG = WHITE & RED 3TPI: 26AWG = WHITE & GREEN 28AWG = WHITE & GREEN	FEMALE SIGNAL 26AWG: G125-0010005 28AWG: G125-0020005
		MC MD		XX		M0 M1 M2 M3 M5				G125-324XX9600 G125-324XX96M1 G125-324XX96M2 G125-324XX96M3 G125-324XX96M5	SEE TABLE ON SHEET 8 FOR TWISTED PAIR WIRE COLOUR CONFIGURATION	MALE SIGNAL 26AWG: G125-1010005 28AWG: G125-1020005

TABLE 2: MULTI-COLOURED WIRE	
CONTACT No.	WIRE COLOUR
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GREY
10	WHITE
WIRE COLOURS REPEAT IN ABOVE ORDER FOR CONNECTOR ASSEMBLIES OVER 10 CONTACTS	

ORDER CODE:

G125-XXXXXXXX-XXXXL

CONNECTOR: _____
F = FEMALE
M = MALE

WIRING STYLE: _____
C = STANDARD WIRE
D = TWISTED PAIR

WIRE GAUGE: _____
1 = 26AWG
2 = 28AWG

TOTAL No. OF CONTACTS: _____
06, 10, 12, 16,
20, 26, 34, 50

DIM 'A' LENGTH:
0060 = 60mm MIN
9999 = 9999mm MAX

CONNECTOR FIXING STYLE:
F0/F1/F2/F3/F5
M0/M1/M2/M3/M5

WIRING:
05 = WHITE
68 = MULTI-COLOURED

NOTES:

- FOR COMPLETE SPECIFICATION, INCLUDING WIRE TYPE AND GAUGE SEE COMPONENT SPECIFICATIONS C125XX & C049XX (LATEST ISSUES).
- FOR POTTING COMPOUND AND WIRE TYPE SEE C049XX COMPONENT SPECIFICATION.
- SEE SHEET 7 FOR ASSEMBLIES WITH STANDARD WIRING CONFIGURATIONS.
- SEE SHEET 8 FOR ASSEMBLIES WITH TWISTED PAIR WIRING CONFIGURATIONS.
- SEE SHEET 9 FOR HARDWARE FIXING INFORMATION.
- FOR ALL HOUSING DIMENSIONS, SEE RESPECTIVE DRAWINGS FOR BOM ITEM 1.
- CABLE ASSEMBLIES ARE BULK PACKED IN BAGS.
- CUSTOM LENGTH CABLE ASSEMBLIES CAN BE PRODUCED FROM 60mm TO 9999mm.

HARWIN

www.harwin.com

TOLERANCES

X. = $\pm 1\text{mm}$
X.X = $\pm 0.50\text{mm}$
X.XX = $\pm 0.20\text{mm}$
X.XXX = $\pm 0.01\text{mm}$
ANGLES = $\pm 5^\circ$
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL:

SEE ABOVE

TITLE:

GECKO SL
CABLE ASSEMBLY

DRAWING NUMBER:

G125-XXXXXXXX-XXXXL

SHT
6
OF
9

RTP	1	31.05.23	32231
NAME	ISS.	DATE	CN/CO
APPROVED:		A.BOXALL	
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
ASSEMBLY DRG:			

Customer Information Sheet




IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

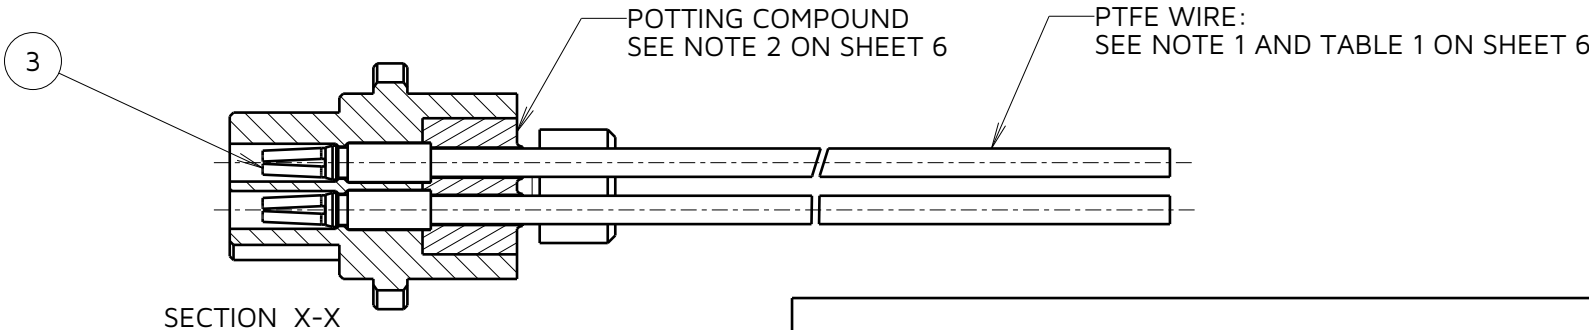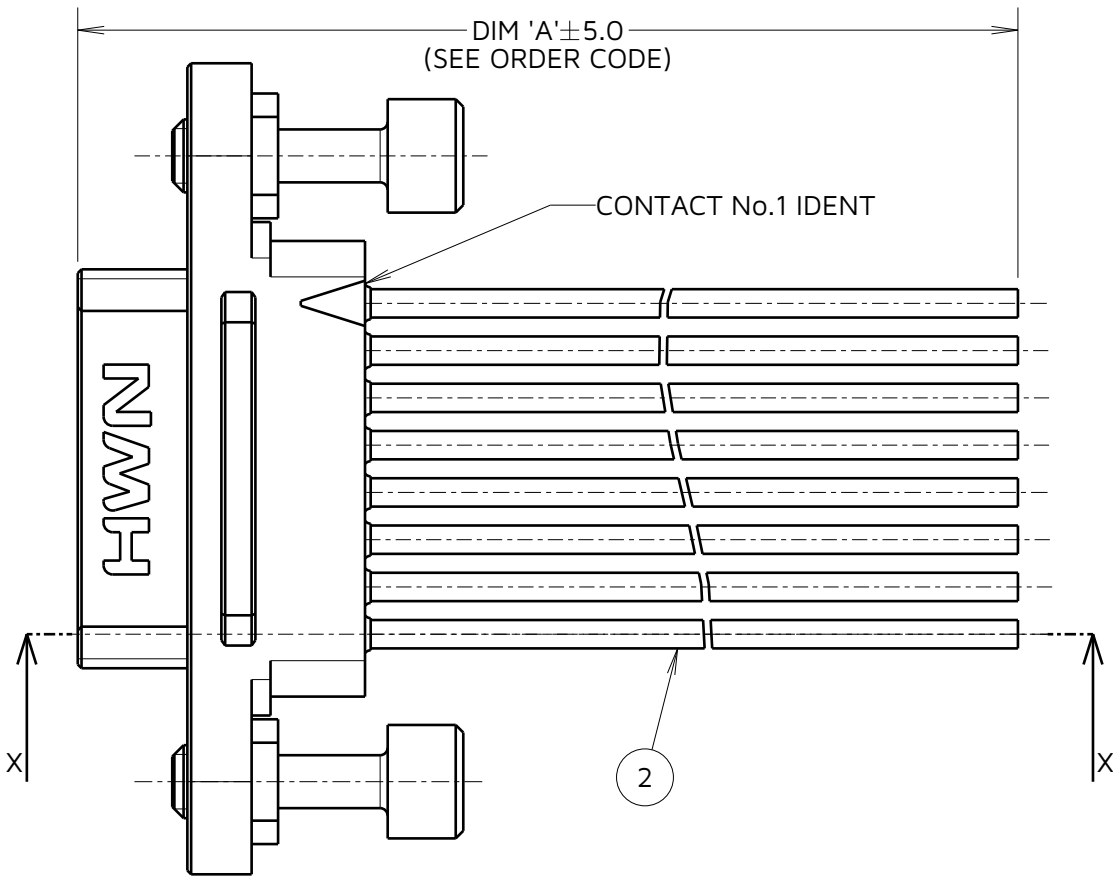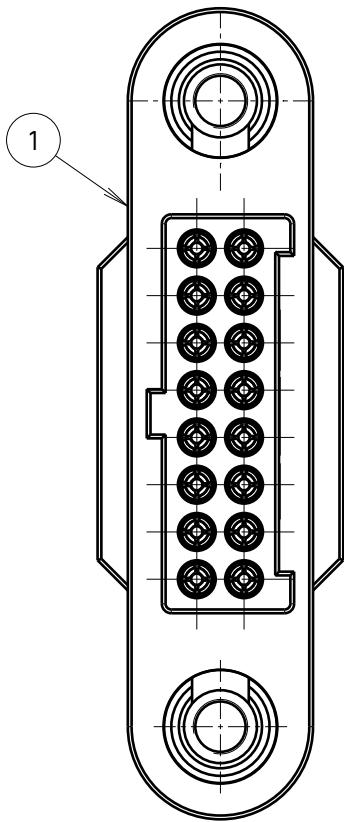

EXAMPLE SHOWN: FEMALE
STANDARD WIRING
G125-FC11605F1-0150L

ORDER CODE:

G125-XXXXXXXXXX-XXXXL

CONNECTOR:

F = FEMALE
M = MALE

WIRING STYLE:

C = STANDARD WIRE
D = TWISTED PAIR

WIRE GAUGE:

1 = 26AWG
2 = 28AWG

TOTAL No. OF CONTACTS:

06, 10, 12, 16,
20, 26, 34, 50

DIM 'A' LENGTH:
0060 = 60mm MIN
9999 = 9999mm MAX

CONNECTOR FIXING STYLE:
F0/F1/F2/F3/F5
M0/M1/M2/M3/M5

WIRING:
05 = WHITE
68 = MULTI-COLORED

- NOTES:
- FOR POSSIBLE COMBINATIONS, SEE BOM TABLE ON SHEET 6.
 - ASSEMBLY G125-FC11605F1-0150L SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. SEE ORDER CODE FOR PART NUMBER.

HARWIN

www.harwin.com

TOLERANCES

X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL:

SEE SHEET 6

TITLE:

GECKO SL
CABLE ASSEMBLY

DRAWING NUMBER:

G125-XXXXXXXXXX-XXXXL

SHT

7
OF
9

RTP	1	31.05.23	3223
NAME	ISS.	DATE	CN/CO
APPROVED:		A.BOXALL	
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
ASSEMBLY DRG:			

Customer Information Sheet




IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

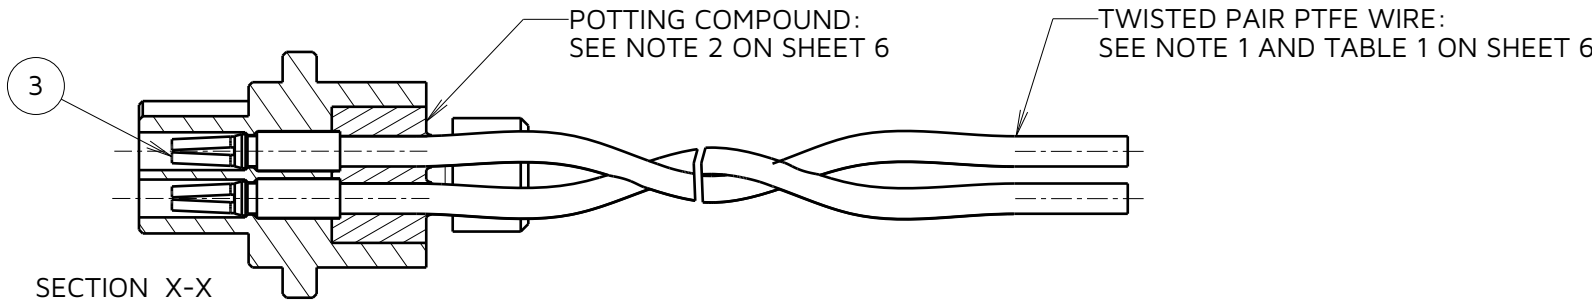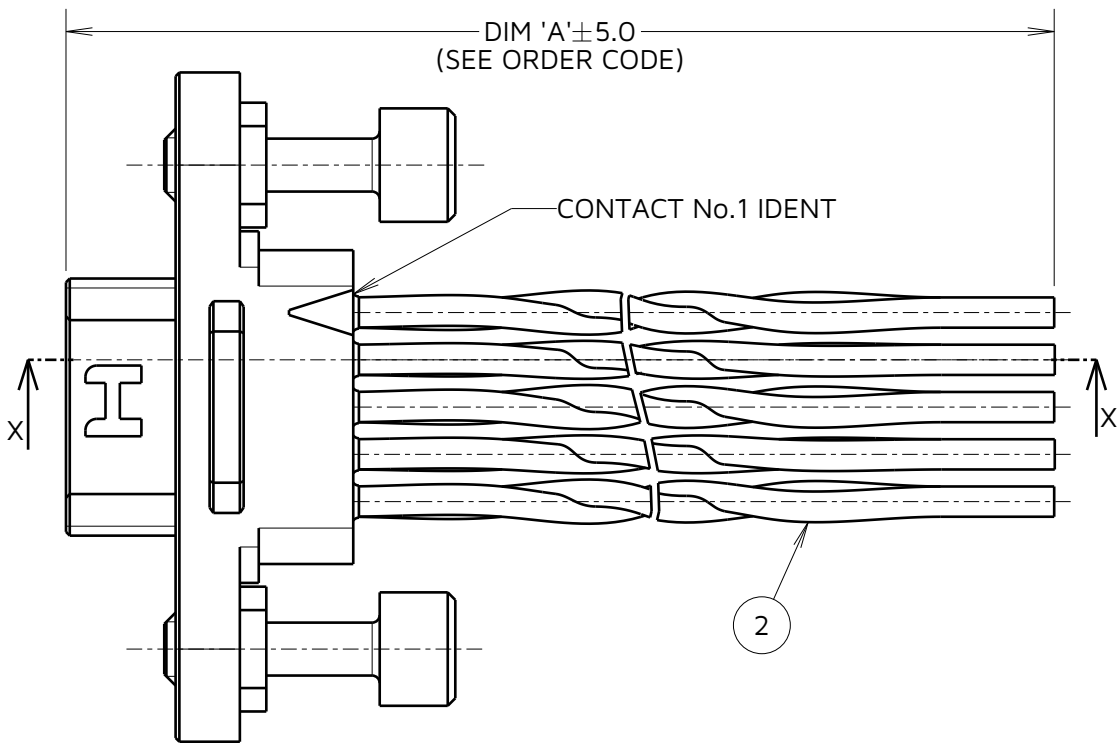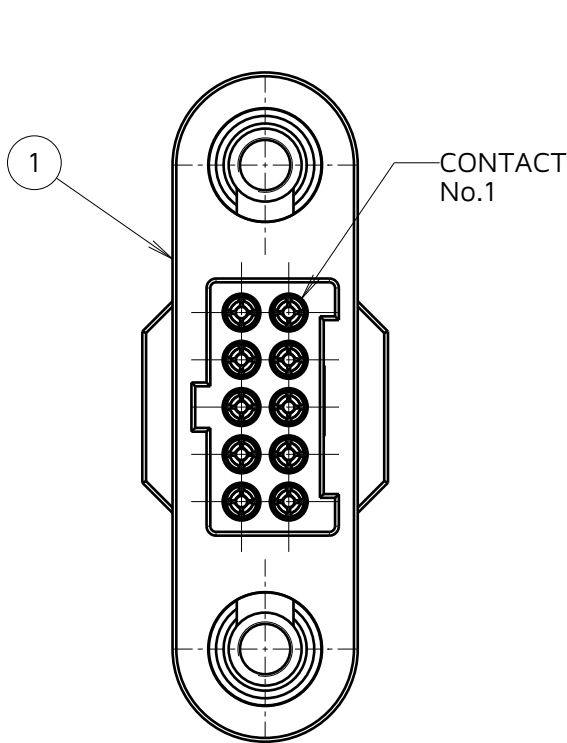

EXAMPLE SHOWN: FEMALE
TWISTED PAIR WIRING
G125-FD11005F1-0150L

TABLE 3: TWISTED PAIR CABLE CONFIGURATIONS			
WIRING FOR EXAMPLE PART No. G125-FD10805F1-0150L			
TWISTED PAIR No.	CONNECTOR PIN No.	TURNS PER INCH	WIRE COLOUR
1	1	3	WHITE & GREEN
	5		
2	2	2	WHITE & RED
	6		
3	3	3	WHITE & GREEN
	7		
4	4	2	WHITE & RED
	8		

FOR CONNECTORS WITH MORE THAN 8 SIGNAL CONTACTS, CONTINUE TWIST & CABLE PIN OUT CONVENTION IN THE SAME PATTERN.
(I.E. TWISTED PAIR BETWEEN CONTACT X & CONTACT X)

SEE BILL OF MATERIALS TABLE ON SHEET 6 FOR TWISTED PAIR PART NUMBERS.

- NOTES:
- FOR POSSIBLE COMBINATIONS, SEE BOM TABLE ON SHEET 6.
 - ASSEMBLY G125-FC11005F1-0150L SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. SEE ORDER CODE FOR PART NUMBER.
 - WIRE COLOUR IS CONSTRAINED BY TWISTED PAIRS. SEE TABLE 3 FOR COLOUR.

ORDER CODE:

G125-XXXXXXXXXX-XXXXL

CONNECTOR: _____
F = FEMALE
M = MALE

WIRING STYLE: _____
C = STANDARD WIRE
D = TWISTED PAIR

WIRE GAUGE: _____
1 = 26AWG
2 = 28AWG

TOTAL No. OF CONTACTS: _____
06, 10, 12, 16,
20, 26, 34, 50

DIM 'A' LENGTH: _____
0060 = 60mm MIN
9999 = 9999mm MAX

CONNECTOR FIXING STYLE: _____
FO/F1/F2/F3/F5
M0/M1/M2/M3/M5

WIRING: _____
05 = WHITE
68 = MULTI-COLOURED

RTP	1	31.05.23	32231
NAME	ISS.	DATE	CN/CO
APPROVED:		A.BOXALL	
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
ASSEMBLY DRG:			

HARWIN

www.harwin.com

TOLERANCES
X. = $\pm 1\text{mm}$
X.X = $\pm 0.50\text{mm}$
X.XX = $\pm 0.20\text{mm}$
X.XXX = $\pm 0.01\text{mm}$
ANGLES = $\pm 5^\circ$
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL:

SEE SHEET 6

TITLE:
**GECKO SL
CABLE ASSEMBLY**

DRAWING NUMBER:
G125-XXXXXXXXXX-XXXXL

SHT
8
OF
9

Customer Information Sheet

IF IN DOUBT - ASK

©

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

FIXING STYLES


F0

EXAMPLE: G125-224129600

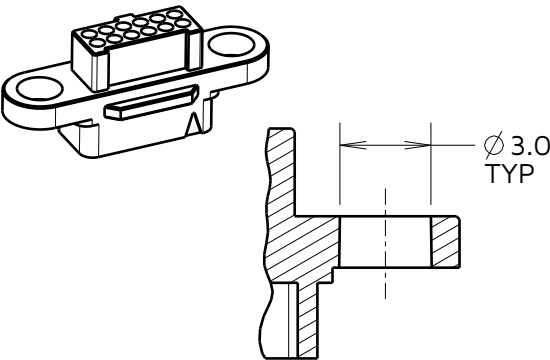


F1

EXAMPLE: G125-2241296F1

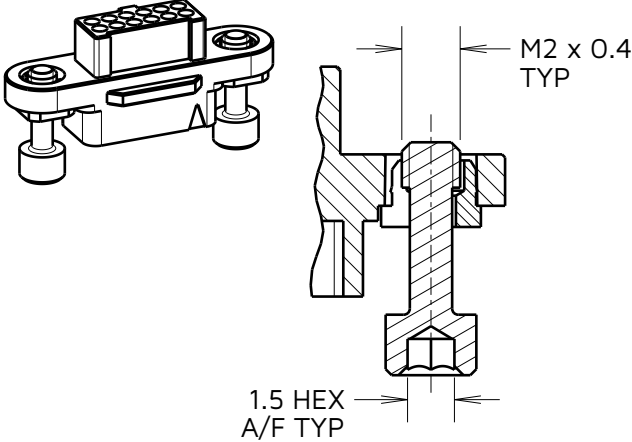


F2

EXAMPLE: G125-2241296F2

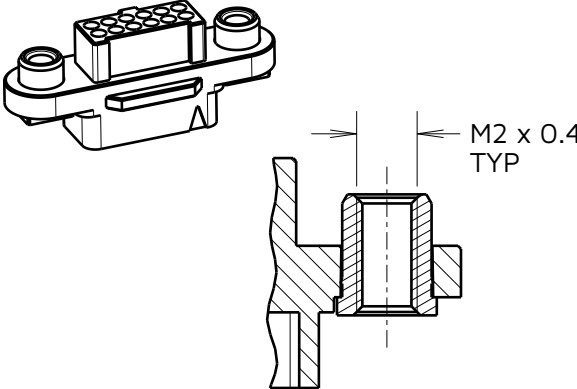


F3

EXAMPLE: G125-2241296F3

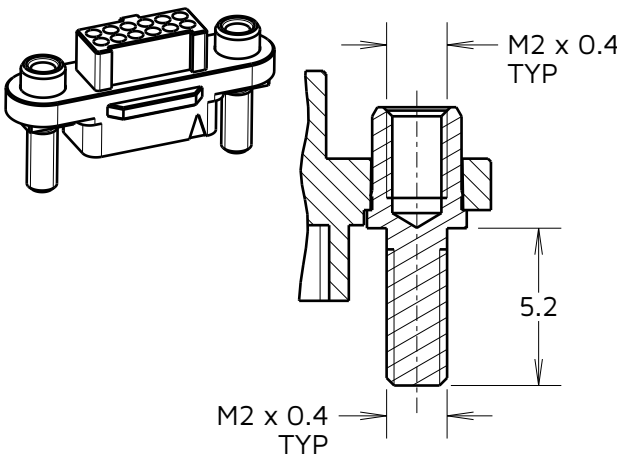


F5

EXAMPLE: G125-2241296F5

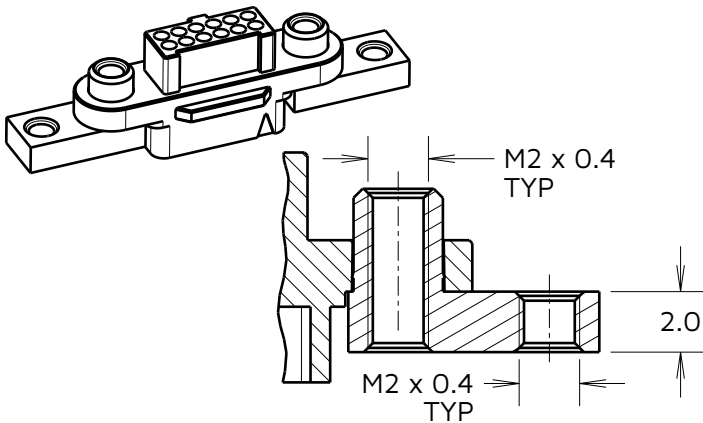


M0

EXAMPLE: G125-324129600

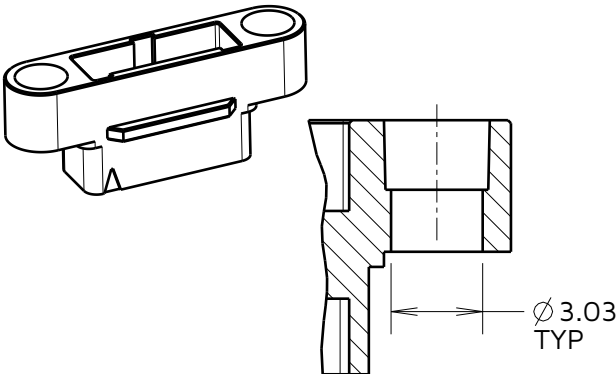


M1

EXAMPLE: G125-3241296M1

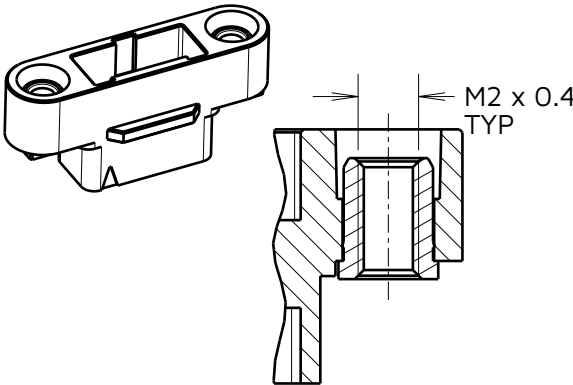


M2

EXAMPLE: G125-3241296M2

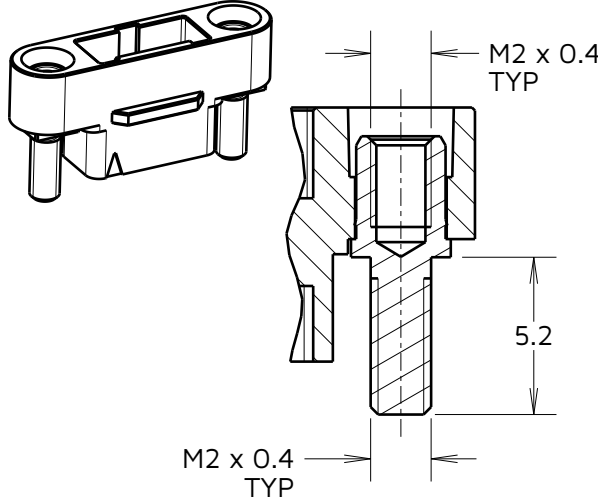


M3

EXAMPLE: G125-3241296M3

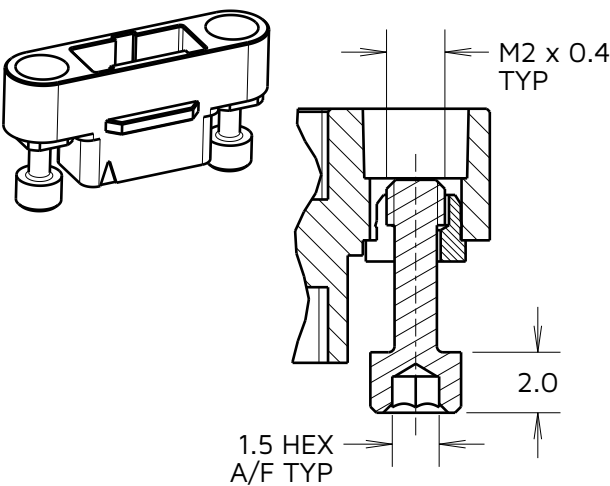

M5

EXAMPLE: G125-3241296M5

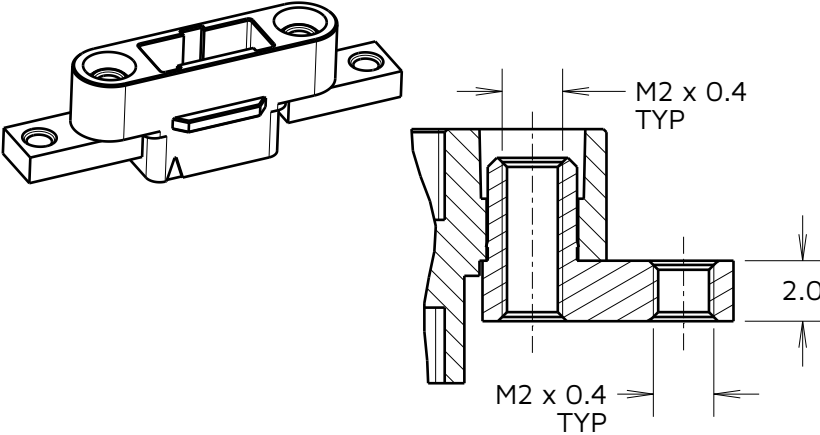

NOTES:
14. SEE BILL OF MATERIALS TABLE ON SHEET 6 AND ORDER CODE FOR FIXING IDENTIFICATION.

HARWIN

www.harwin.com

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL:

SEE SHEET 6

TITLE:
**GECKO SL
CABLE ASSEMBLY**
DRAWING NUMBER:
G125-XXXXXXXX-XXXXL
SHT
9 OF 9

RTP	1	31.05.23	32231
NAME	ISS.	DATE	CN/CO
APPROVED:		A.BOXALL	
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
ASSEMBLY DRG:			