

Combined Motion and Presence Detector for Automatic Curved and Straight Sliding Doors GUARDIAN 2

CARLO GAVAZZI



- Overhead sensor for curved and straight sliding doors
- Motion and presence detection in one unit
- Digital Video Camera Technology
- Easy teach of presence zone
- Environmental adaptation
- No Crosstalk between sensors
- Separate motion and presence output
- 2 x SPST relay outputs
- Supply voltage: 12 to 24 VAC/DC
- LED indication for: Power, Motion and Presence
- CE, UL325 and TÜV approved



Product Description

The GUARDIAN 2 is an overhead sensor for pedestrian sliding doors. The sensor has combined motion and presence (safe) detection zones. The sensor is based on CMOS camera technology and detection on image processing. The motion zone reacts only to movement whereas the presence zone reacts to both movement and presence. The motion zone can be blanked in 3 directions (front, left and right) in order to avoid detec-

tion of unwanted objects. The presence zone is taught into the sensor by recognition of standard test targets in the setup phase - it will adapt to the shape of a curved or straight sliding door. The presence zone also adapts to the surroundings to work in different weather conditions. The sensor has separate outputs for the motion and presence zones as well as a test input to test the sensor function for each door cycle.

Ordering Key

GUARDIAN 2

Type Selection

Housing size	Ordering no.
210 x 77 x 58 mm	GUARDIAN 2

Specifications

Rated operational voltage (U_e)	12 - 24 VAC (12 - 24 VCA) RMS incl. ripple 50-60 Hz, ±15% tolerance 12 - 24 VDC (12 - 24 VCC) ±15% tolerance			Test input* Active high:	Max. input current 5 mA ON > 9 VAC/VDC OFF < 6 VAC/VDC
				Active low:	ON < 6 VAC/VDC OFF > 9 VAC/VDC
No load supply current (I_e)	Typical 192 mA 146 mA 103 mA 65 mA	Max. 230 mA 170 mA 120 mA 80 mA	@ 12V AC @ 12V DC @ 24V AC @ 24V DC	Sensitivity	Adjusting in 7 steps
Technology	Digital video camera technology			Presence zone reaction time Reaction time:	210 ms (20% contrast, object speed 1 m/s, test body CA (DIN18650-1))
Power ON delay	5 seconds			Fall time:	500 ms
Output function* Safety and Motion Zone Common relay data: Operations minimum	Relay – SPST 1A DC 30VDC 600.000 @ 0,5A, 50 VAC/ 30 VDC			Motion zone reaction time Reaction time:	1,2 s (20% contrast, object speed 1 m/s, test body CA (DIN18650-1))
Operations minimum	100.000 @ 1A, 30 VDC			Fall time:	500 ms

* UL connected to supply class 2

Specifications (cont.)

Presence time (Background relearn time) In accordance with DIN18650 Not in accordance with DIN18650	7 step rotary switch 1 min, 5 min. 10 sec, 30 sec.	Type of ESPE Type 2	The sensing functions have to be tested for each door cycle by applying a test signal to the terminals 2+3. See test input.
Vibration	10 to 150 Hz 0.5 mm/7.5g (IEC 60068-2-6)	LED indications Green LED Yellow LED Red LED	Power ON Motion detected Presence detected For special LED functions see page 3
Shock	2 x 1 m and 100 x 0.5 m (IEC 60068-2-32)	Rated Insulation voltage	50 VDC
Ambient temperature range** Operating Store	-25° to +55°C (-13° to +131°F) -25° to +80°C (-13° to +176°F)	Weight	460 g
Ambient light	10 lux - 50.000 lux 40 lux - 50.000 lux, TÜV approved, measured at the sensor surface	Electromagnetic compatibility	In acc. with EMC directive 2004/108/EG Immunity in acc. with EN61326-1 and EN61326-3-1
Contrast	Min. 20% contrast between the floor and object	Marking	CE
Material Housing and cover Front glass	ABS Black Clear transparent, polycarbonate.	TÜV-Approval	In acc. with machinery directive 2006/42/EC, annex I DIN 18650-1 § 5.7.4, edition 2005 (prEN16005), EN13241-1, EN 12978, edition 2003, EN61508, edition 2001, ENISO13849-1: 2008 cat.2 pl. c for presence detection
Connection cable	3 m 8 x 0,14 mm ² LIYY grey Max. cable length: 10 m.	 Baumuster geprüft	
Environment protection	IP64 (EN 60529, 60947-1)	UL-Approval	cULus
Installation category	III (IEC 60664 / 60664A / EN 60947-1)		UL325, CSA-C22.2 No.247
Pollution degree	3 (IEC 60664 / 60664A / EN 60947-1)		
Humidity	0 % to 90 % relative, non condensing		

** UL approved temperature range -25° to +40°C (-13° to +104°F)

Specifications straight sliding door

Motion zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 246 x 204 cm 300 x 249 cm 410 x 340 cm The motion area can be blanked from left, right and front in 7 steps on three rotary switches
Presence zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 42 cm x door width 51 cm x door width 70 cm x door width
Mounting height	1.8 m to 3.0 m
Placement of sensor Horizontal distance from door Vertical distance from door	max 50 cm in front of the door. The sensor must be able to see the door opening. 10 cm from the top of the door opening

Specifications curved sliding door

Door radius size as a function of mounting height Height 200 cm Height 250 cm Height 300 cm	Radius 130 cm Radius 170 cm Radius 200 cm
Sensor distance from curved door (a) as a function of curved door radius (Fig. 1) Radius 80 cm Radius 90 cm Radius 100 cm Radius 110 cm Radius 120 cm Radius 130 cm Radius 140 cm Radius 150 cm Radius 160 cm Radius 170 cm Radius 180 cm Radius 190 cm Radius 200 cm	Distance 8.2 cm Distance 10.2 cm Distance 12.2 cm Distance 14.3 cm Distance 16.7 cm Distance 18.7 cm Distance 21.0 cm Distance 23.4 cm Distance 25.8 cm Distance 28.3 cm Distance 30.8 cm Distance 33.3 cm Distance 35.9 cm
Mounting height	1.8 m to 3.0 m

Operation Diagram



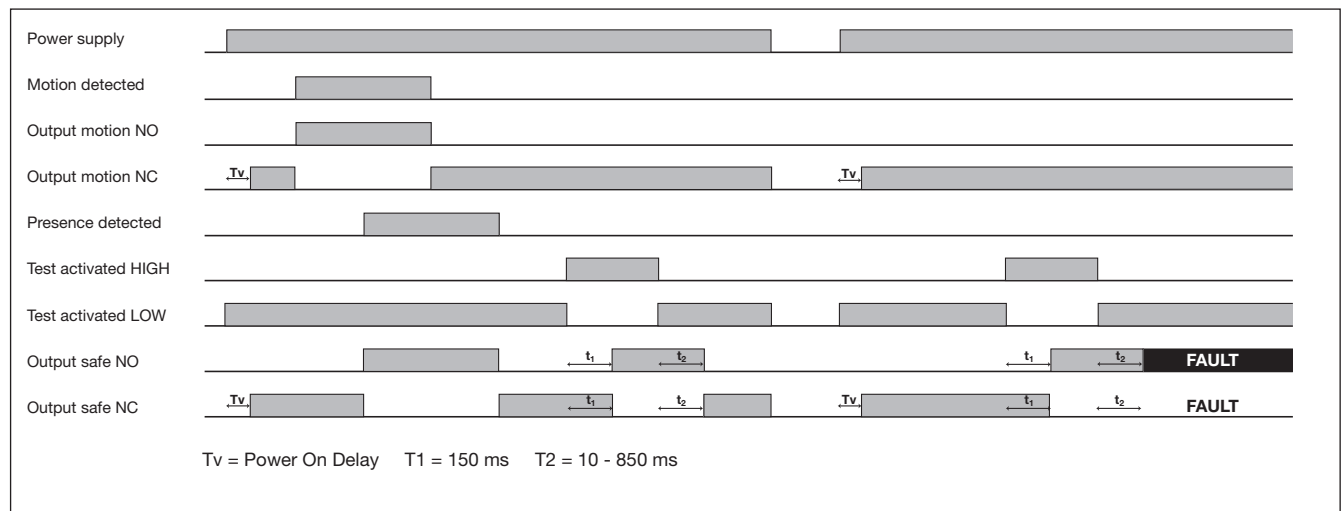


Fig. 1

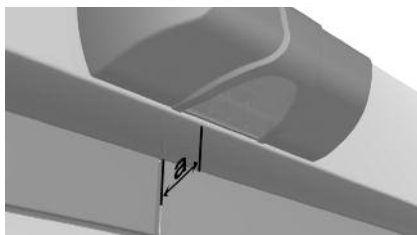

Horizontal distance to door (a)

Component Guide

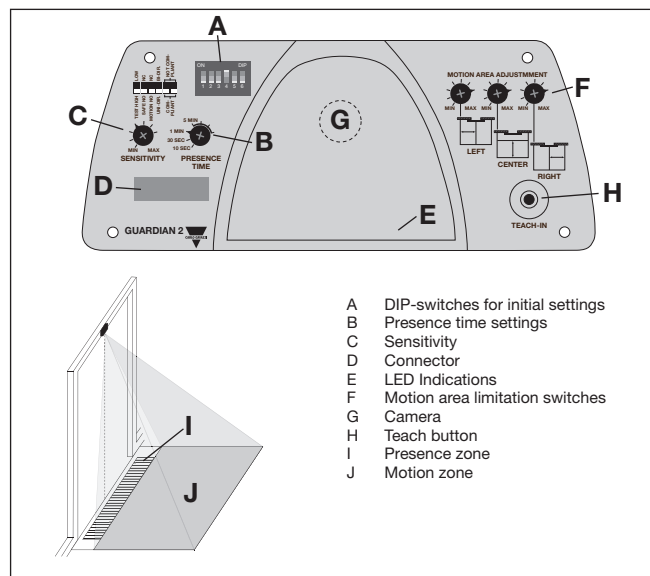

DIP-Switch Settings

Set up the DIP-switches to match the door controller.

DIP-switch 1 - Sensor test input

- ☐ Test input Active Low
- ☐ Test input Active High

DIP-switch 2 - Safety output



- ☐ Normally closed (NC)
- ☐ Normally open (NO)

DIP-switch 3 - Motion output

- ☐ Normally closed (NC)
- ☐ Normally open (NO)

DIP-switch 4 - Direction recognition

- ☐ Bi-directional mode
- ☐ Uni-directional mode)




DIP-switch 5 and 6

- ☐ Not in accordance with DIN18650-1 (prEN16005)
- ☐ In accordance with DIN18650-1 (prEN16005)
- ☐ Not valid (red LED flashes and output relays is set in safe mode)

LED Indications

Situation / LED	Yellow	Red	Green
Normal	Motion detected	Presence detected	Power On
No presence zone stored	Running light on all LED's		
Teach mode	Flashing simultaneously		
Background stored	Off	Off	Flashing
Not allowed DIN18650	Off	Flashing	On
Self test failed	Flashing simultaneously		On
Sensor error Contact installer	On	On	Off

Dimensions

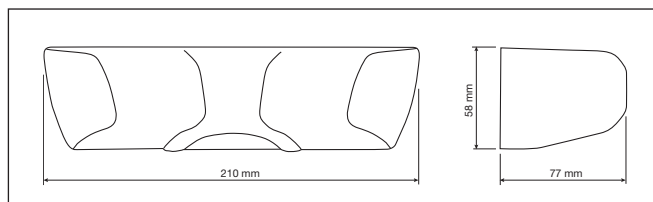

Delivery Contents

- GUARDIAN 2 door sensor
- User Manual
- Drilling template
- 3 m connection cable with connector
- **Packaging:** Cardboard box

Wiring Diagram

