


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP. 2005
© COPYRIGHT 2005 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	Released as per ECR-08-022292	4-Sep-08	SP	JC
	V	ECR-16-003725	12MAR2016	KR	TN

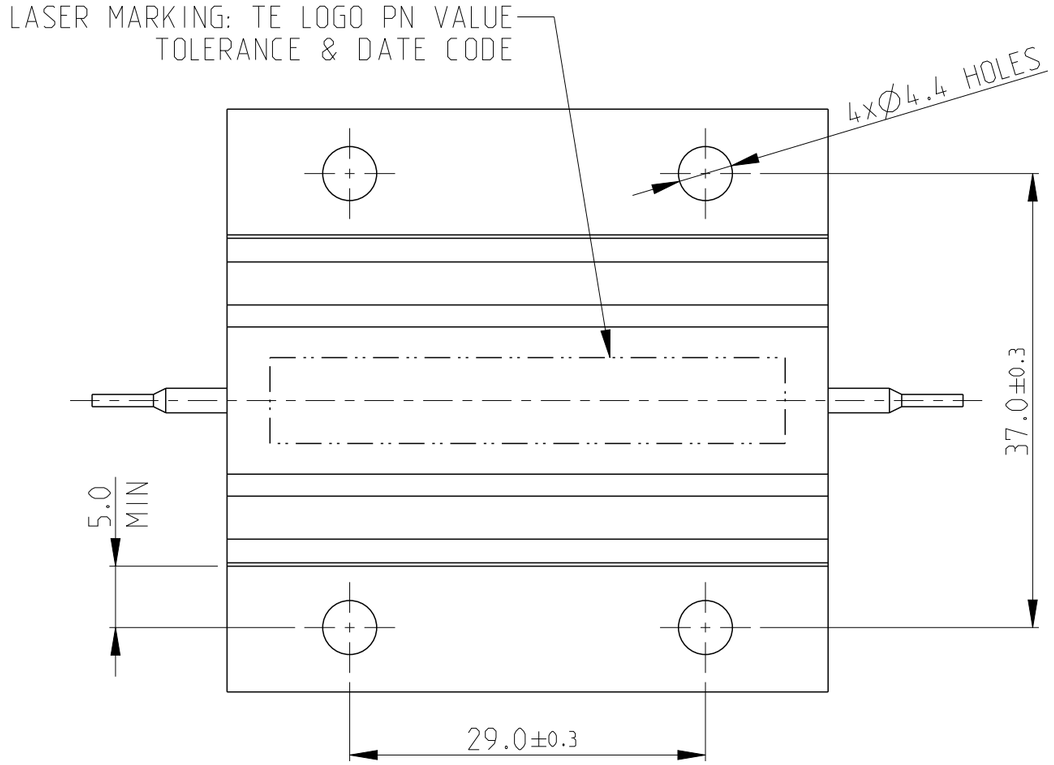

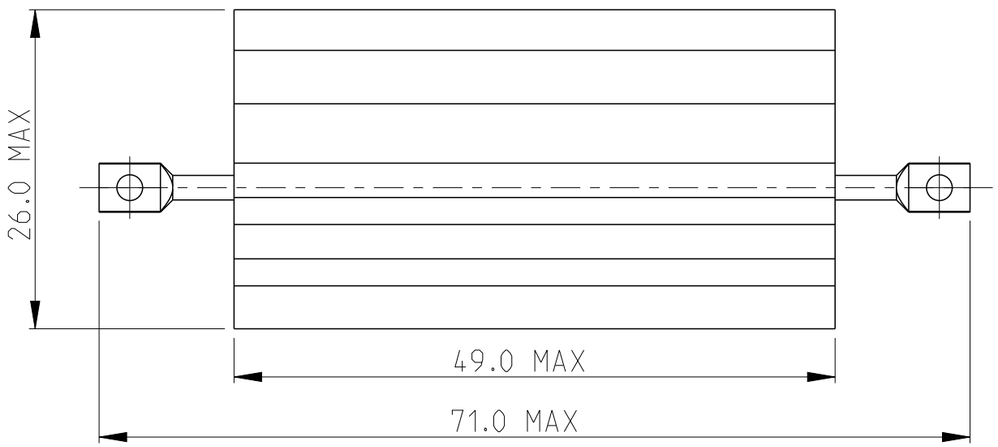

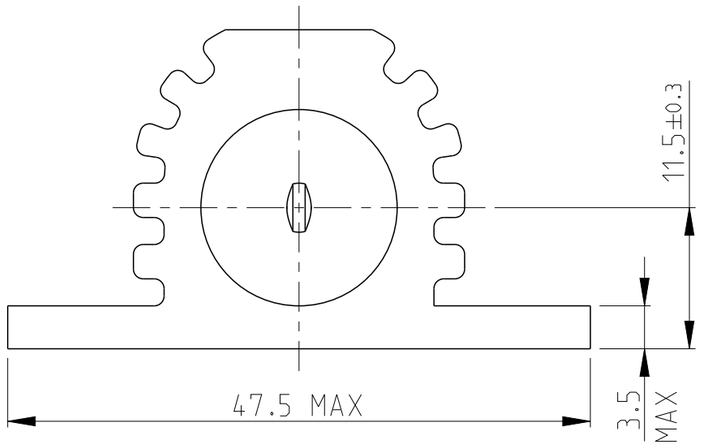


1 FOR FURTHER INFORMATION SEE DATA SHEET FOR HS SERIES-ALUMINIUM HOUSED RESISTORS

2 FOR A SPECIFIC PN FOR A RESISTANCE VALUE AND TOLERANCE, PLEASE REFER TO DMF

3 TECHNICAL SPECIFICATION

DISSIPATION AT 25°C	75 WATTS MOUNTED ON STANDARD HEATSINK
BS OHMIC RANGE	R10 TO 50K
STABILITY	ΔR < =2% PER 1000Hrs
ISOLATION VOLTAGE	3500V DC/AC pk
MAX WORKING VOLTAGE	1400V DC/AC rms
TEMP COEFFICIENT	> 1R0 50ppm > 100R 25ppm
CLIMATIC CATEGORY	55/200/56

RoHS Compliant

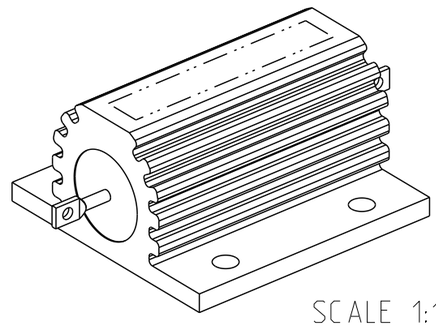

SCALE 1:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.5
1 PLC ±0.2
2 PLC ±0.1
3 PLC ±-
4 PLC ±-
ANGLES ±5°

MATERIAL: - material_2

FINISH: - finish_spec_2

DWN DAVE KENNEDY 27.SEP.05
CHK J CATCHPOLE 28.SEP.05
APVD J CATCHPOLE 28.SEP.05
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME HSC75 METAL CLAD RESISTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1625995	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV V