


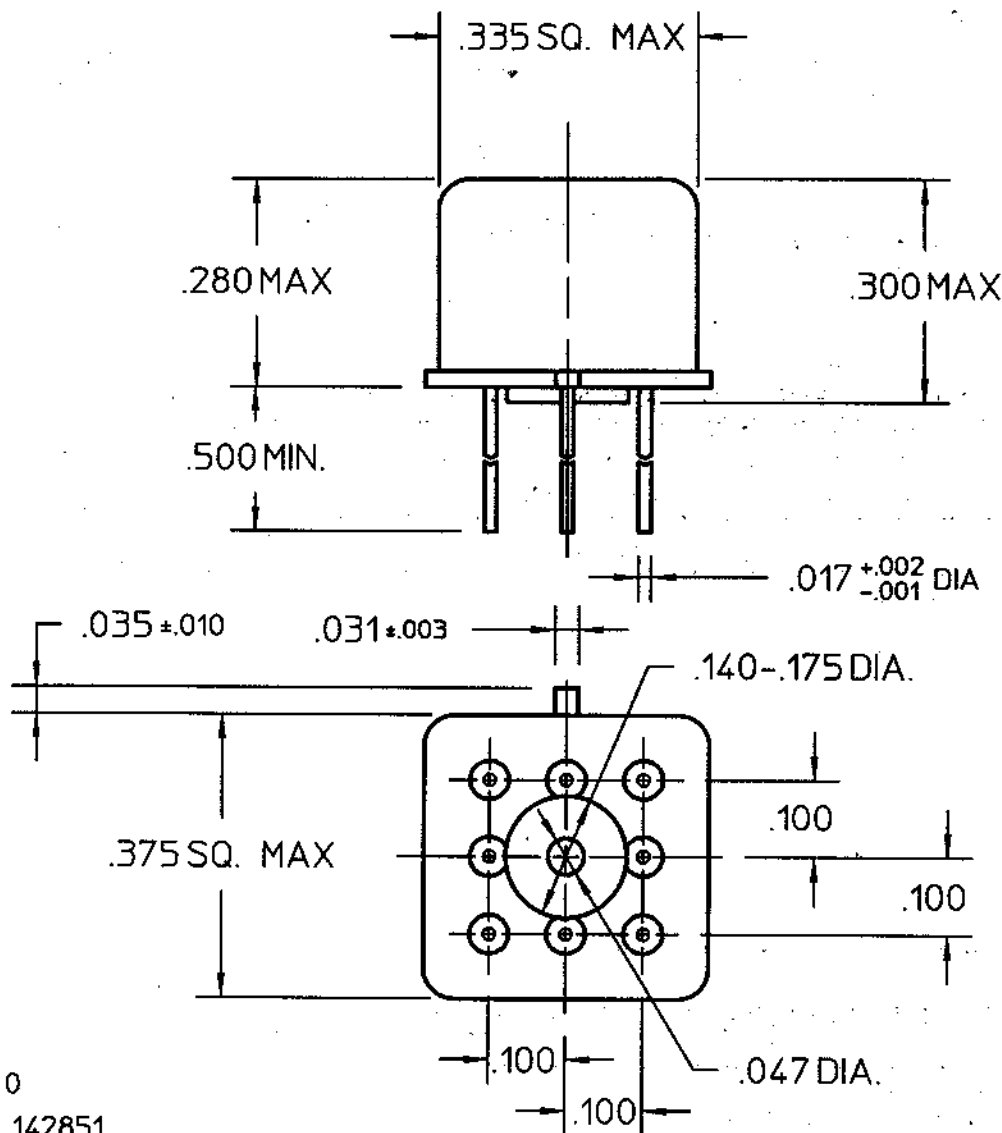

REV. 0

DCO 142851


COIL: @ 25°C  
 RESISTANCE 390 OHMS ±10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 7.0 VDC  
 MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX  
RELEASE TIME 15 MS MAX  
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 4/3/01

CK. JERRY 4/3/01

**CCI Technologies**  
 advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/17-040M REV.

JMGA RELAY

JMGAC-12MW