


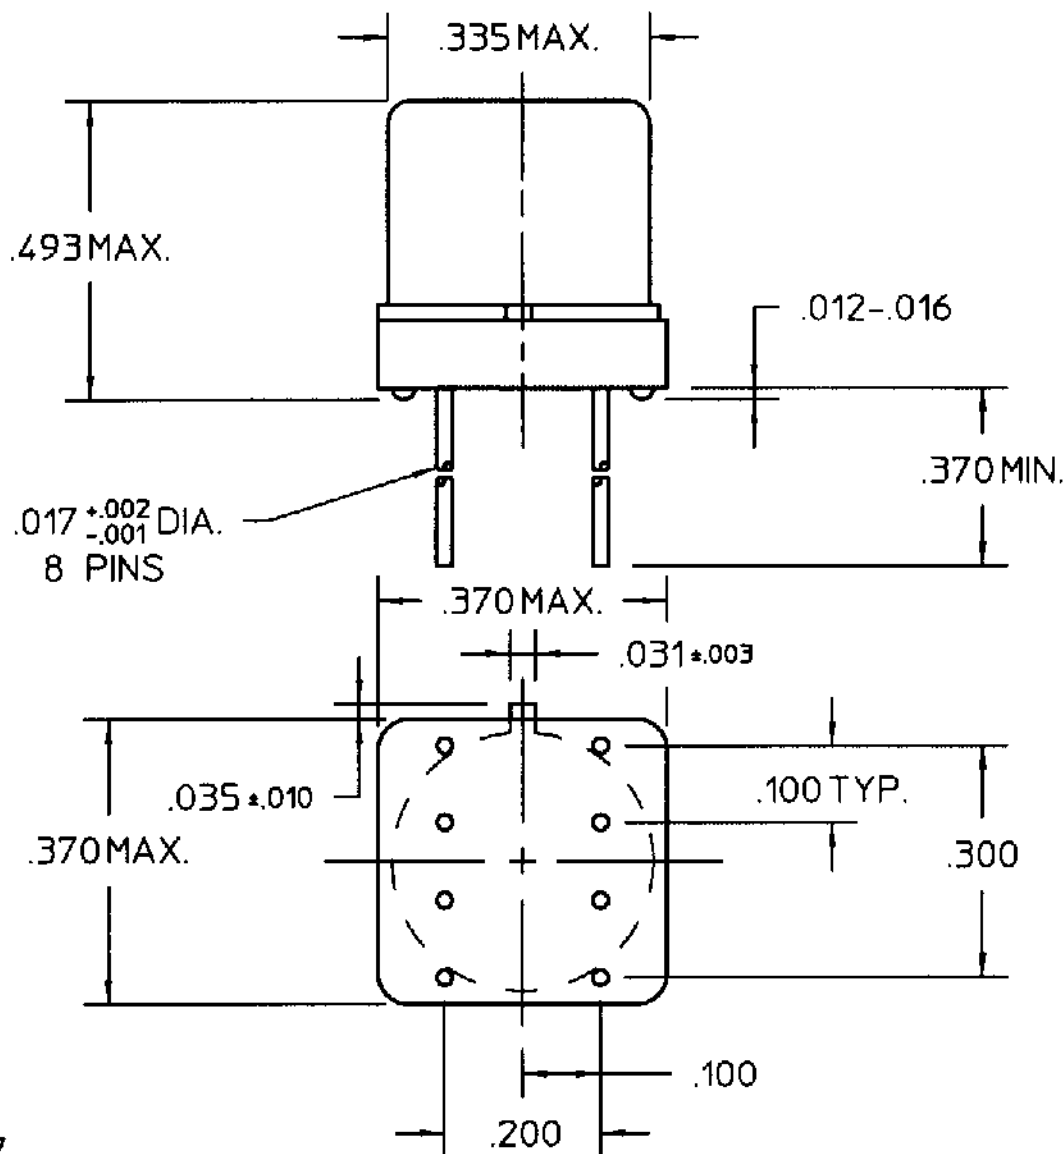

REV. 1  
DCO 142087


COIL: @ 25°C  
RESISTANCE \_\_\_\_\_ 850 OHMS  $\pm$  10%  
NOMINAL VOLTAGE \_\_\_\_\_ 12.0 VDC  
MUST OPERATE \_\_\_\_\_ 7.0 VDC  
MUST RELEASE \_\_\_\_\_ 4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 3000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
SHOCK \_\_\_\_\_ 75 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE TIME 4.0 MS MAX  
\_\_\_\_\_ RELEASE TIME 2.0 MS MAX  
\_\_\_\_\_ CONTACT BOUNCE 15 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_ LOW LEVEL TO  
1A 28 VDC RESISTIVE 100,000  
OPERATIONS

DR. R.B. 10/3/95

CK. *John C* 6/8/00

COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. \_\_\_\_\_ OPL  
CUST. NO. M39016/11-043L REV. \_\_\_\_\_

"JMS" RELAY

JMSC-12XLS