


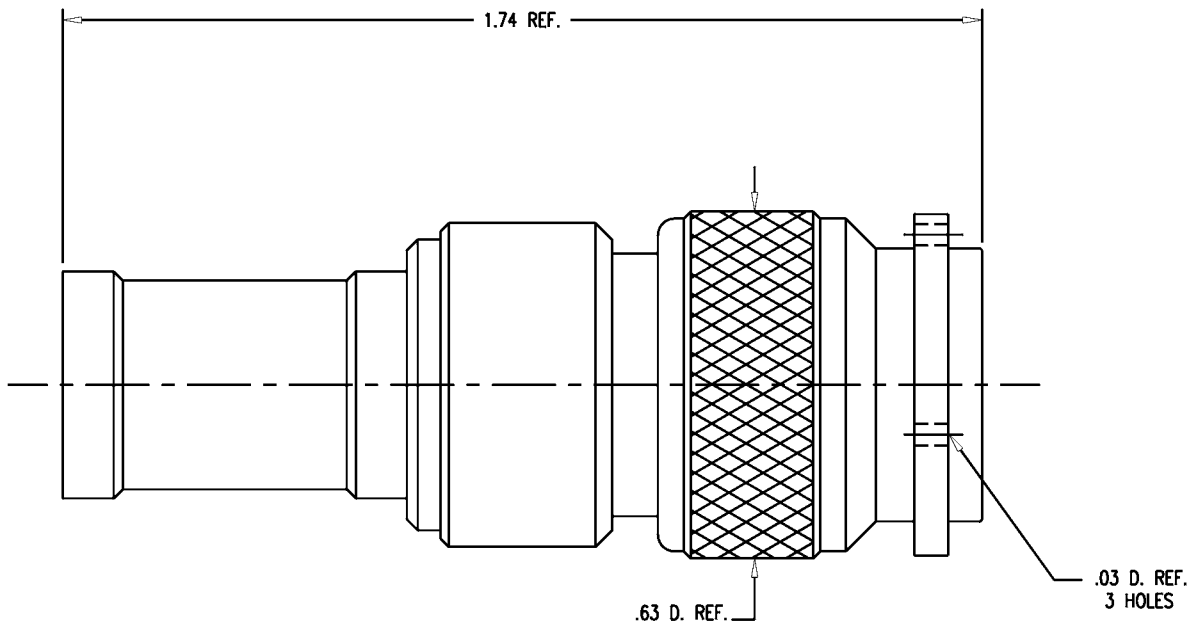

NOTES:

1. FOR USE WITH RAYCHEM 5012H3012 & ITT BA20048 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-5402.
3. FOR CRIMPING USE DIE SIZE 127.
4. MARK PACKAGE: KINGS KA-59-391-M06
XXXX (DATE CODE)
5. MATERIALS:
K-GRIP SLEEVE: BRONZE, ASTM-B135.
INSULATOR: TEFLON, ASTM-D-4894.
OUTER CONTACT: COPPER, ASTM-B-194
C-RING: BRONZE, ASTM-B-103
GASKET: SILICONE RUBBER, ZZ-R-765
ALL OTHER METAL PARTS: BRASS, ASTM-B16, H02
6. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS.
FREQUENCY RANGE: 0 TO 11 GHz.
VOLTAGE RATING: 500 VOLTS RMS.

GSD

GSD

KA-59-391-M06

REVISIONS

ISSUE	CHANGES
4	CN 37192 C REDRAWN PG 07/23/97

JJS0110

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: IRIS ELECTRIC P.O. NO. 1448

PLUG, TNC

DRAWN PG	DATE 11/07/96
DESIGN LI	DATE 11/07/96
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KA-59-391-M06