


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

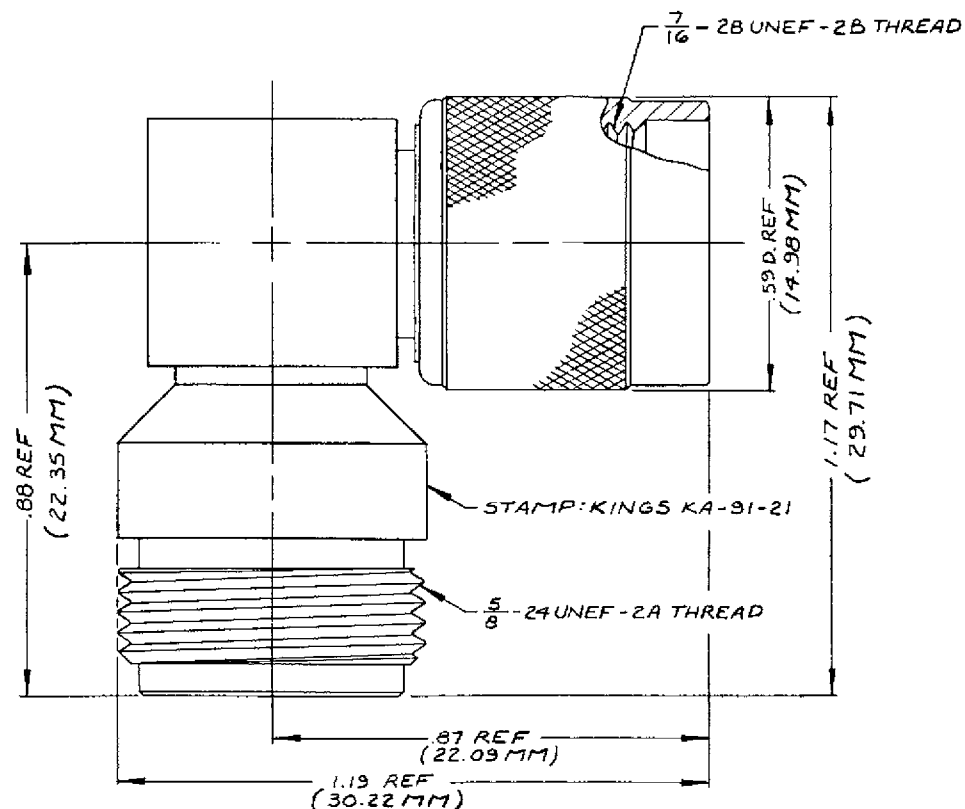

NOTES:

1. MATERIAL:

FEMALE CENTER CONTACT } BERYLLIUM COPPER, QQ-C-530
 OUTER CONTACT }
 C-RING - PHOSPHOR BRONZE, QQ-B-750
 ALL OTHER METAL PARTS - BRASS, QQ-B-626
 INSULATORS - TEFLON, L-P-403
 GASKET - SILICONE RUBBER, ZZ-R-765

2. FINISHES:

CENTER CONTACTS - GOLD PLATE, MIL-G-45204
 ALL OTHER METAL PARTS - SILVER PLATE, QQ-S-365

2. ELECTRICAL CHARACTERISTICS

NOMINAL IMPEDANCE - 50 Ω
 FREQUENCY RANGE - DC TO 11 GHz
 WORKING VOLTAGE - 500 VOLTS RMS

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
 3 PLACE DECIMALS ± .004
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING
6. ALL PLATING IN ACCORDANCE WITH KER 10004.

REVISIONS

ISSUE	CHANGES
2	CN 14392 A JL 4 ARR 75
3	CN 38247 BDH 12 MAR 01

KA-91-21

GSD

SCALE: 4:1

APPROX. SURFACE AREA:

USED ON:

REF:

N(F) TO TNC(M)
 ANGLE ADAPTER

DRAWN JEP DATE 17 MAR 83
 APPR ALB DATE 16 MAR 83

KINGS
 ELECTRONICS CO., INC.
 TAYLOR, NEW YORK 10981

KA-91-21

GSD