

KHAU-17A12-120

✓ ACTIVE

Potter & Brumfield | Potter & Brumfield KHA

TE Internal #: 2-1393122-8

General Purpose Power Relay, AC, Monostable, 4 Form C 4PDT-CO, 5 A Contact Rating, 120 VAC Coil Voltage, Potter & Brumfield KHA

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **4 Form C 4PDT-CO**

Current Type: **AC**

Contact Current Rating: **5 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Number of Poles	4
Coil Special Features	UL Coil Insulation Class B
Contact Arrangement	4 Form C 4PDT-CO

Electrical Characteristics

Contact Limiting Short-Time Current	5 A
Contact Limiting Making Current	5 A
Contact Limiting Continuous Current	5 A
Contact Limiting Breaking Current	5 A
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Contact Switching Load (Min)	300mA @ 12V
Coil Resistance	3900 Ω
Coil Power Rating AC	1.35 VA
Insulation Initial Resistance	100 MΩ
Contact Current Rating	5 A
Coil Voltage Rating	120 VAC



Contact Voltage Rating	240 VAC
------------------------	---------

Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
---	-----------

Body Features

Product Weight	45 g[1.587 oz]
----------------	----------------

Enclosure Type	Dust Protected
----------------	----------------

Contact Features

Contact Material	Silver Cadmium Oxide
------------------	----------------------

Termination Features

Main Termination & Connection Type	Solder Terminals
------------------------------------	------------------

Coil Termination & Connection Type	Solder Terminals
------------------------------------	------------------

Mechanical Attachment

Product Mounting Feature Type	Mounting Studs
-------------------------------	----------------

Product Mount Type	Panel & Socket Mount
--------------------	----------------------

Dimensions

Product Width	21.82 mm[.859 in]
---------------	-------------------

Product Length	28.17 mm[1.109 in]
----------------	--------------------

Product Height	32.54 mm[1.28 in]
----------------	-------------------

Usage Conditions

Operating Temperature Range	-45 – 70 °C[-49 – 158 °F]
-----------------------------	---------------------------

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	70 °C[158 °F]
---	---------------

Operation/Application

Coil Magnetic System	Monostable
----------------------	------------

Current Type	AC
--------------	----

Packaging Features

Packaging Method	Tray
------------------	------

Other

	>1.1 – ≤1.8 VA
--	----------------

Contact Current Class	>2 – ≤5 A
-----------------------	-----------

Height Class (Mechanical)	>27 – ≤33 mm[>1.063 – ≤1.299 in]
---------------------------	----------------------------------

Length Class (Mechanical)	>22 – ≤33 mm[>.866 – ≤1.299 in]
---------------------------	---------------------------------

--	--



Width Class (Mechanical)	>16 – ≤22 mm[>.63 – ≤.866 in]
--------------------------	-------------------------------

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Cd (7.5% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 1419106-2 27E007=SOCKET,KH,14,PC,PHEN,BL,PCB	 TE Part # 2-1419106-6 27E894=SOCKET,KH,14,SCW,POLY,DINRAIL	 TE Part # 1-1393143-9 27E166=SOCKET,KH,14,SCW,SURF-MOUNT	 TE Part # 1-1419106-8 27E1062=SOCKET,KH,14,SCW,POLY,DINRAIL
---	--	---	--



Also in the Series | **Potter & Brumfield KHA**

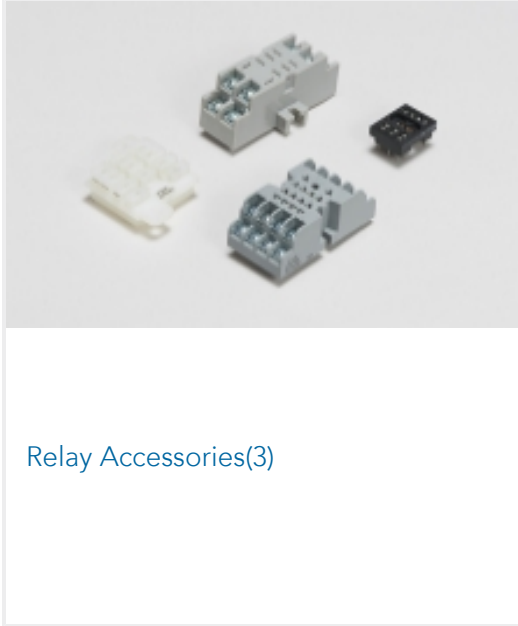

Customers Also Bought

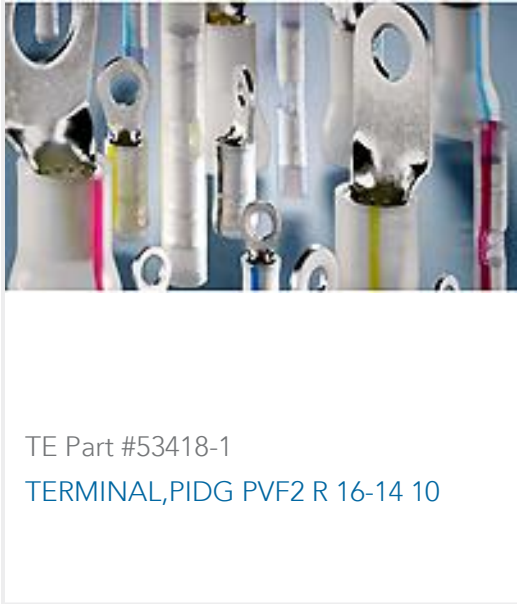



Documents

CAD Files

Customer View Model

ENG_CVM_CVM_2-1393122-8_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1393122-8_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1393122-8_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

KHA

English

KHA General Purpose Dry Circuit to 5A Multicontact AC or DC Relay

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English