


GSD

KM-59-19

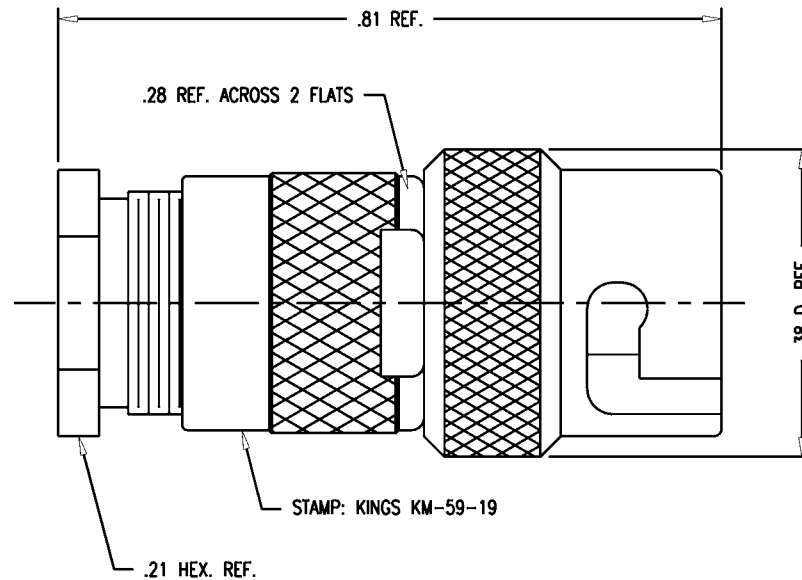

NOTES:

1. FOR USE WITH RG-55, 142 & 223/U CABLE.
2. MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
SPRING: MUSIC WIRE
CENTER CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
3. FINISHES:
SPRING: CADMIUM PLATE PER QQ-P-416
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: NON-CONSTANT
FREQUENCY RANGE: DC TO 500 MHz
VOLTAGE RATING: 500 VRMS

REVISIONS

ISSUE	CHANGES
4	CN 36185 C REDRAWN ME 04/18/95

QGS0349

SCALE 6:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, KM

DRAWN	ME	DATE	04/18/95
DESIGN	U	DATE	04/20/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KM-59-19

GSD