
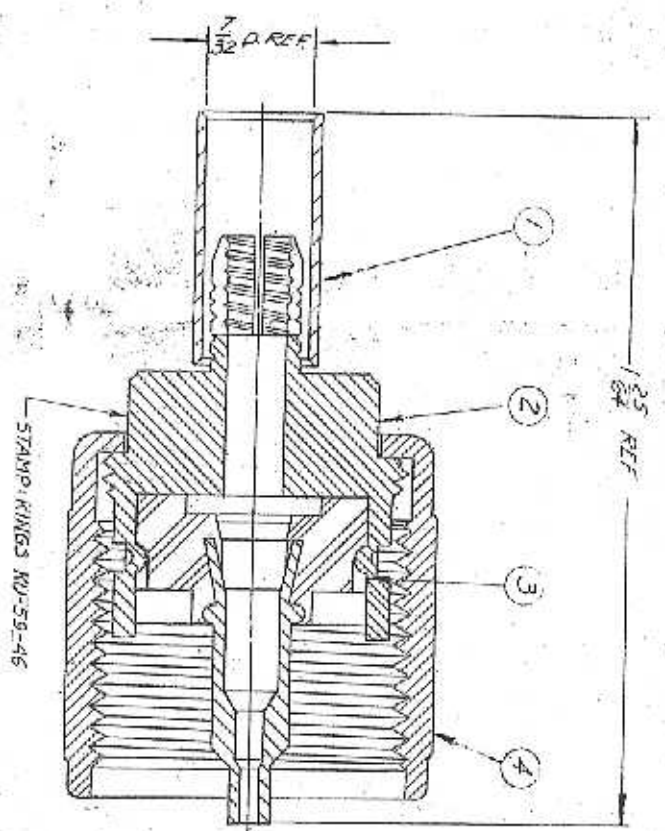


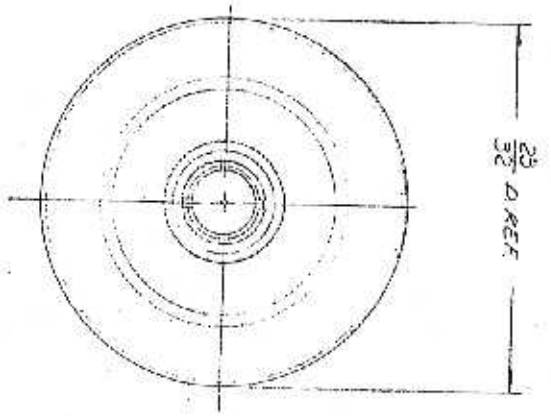

1. K-GRIP FOR RG-58, 58A & 58C/U CABLE
 2. FOR CABLE TRIMMING, USE KUT-12 & KTD-34.
 3. FOR FORMING, USE CRIMP DIE SIZE D1.
 4. FOR CABLING INSTRUCTIONS SEE CP-410.

UNLESS OTHERWISE SPECIFIED:

- 1. DIMENSIONS ARE IN INCHES.
- 2. DECIMALS ± .004, ANGLES ± 0° 30'.
- 3. SURFACES UNLESS OTHERWISE SPECIFIED ARE TO BE FINISHED BY THE MANUFACTURER.
- 4. ALL DIMENSIONS PRIOR TO PLATING.
- 5. REMOVE ALL BURRS, BREAK SHARP EDGES TO MAX .005 INCHES.
- 6. NO FILLETS PERMITTED.
- 7. SURFACES UNLESS OTHERWISE SPECIFIED ARE TO BE FINISHED BY THE MANUFACTURER.
- 8. ALL DIMENSIONS PRIOR TO PLATING.

REV	DESCRIPTION	DATE	BY
1	GRIP CONTACT		
2	COUPLING NUT		
3	INSULATOR ASSY		
4	BODY		
5	K-GRIP SLEEVE		
6	DESCRIPTION		
7	DESCRIPTION		

REV	DESCRIPTION	DATE	BY
1	CU-58-58A		
2	CU-58-58A		
3	CU-58-58A		
4	CU-58-58A		
5	CU-58-58A		
6	CU-58-58A		
7	CU-58-58A		

DRAWN: A.E. APPR: L.I. DATE: 10/10/83 KINGS ELECTRONICS 4000 WILSON ROAD FARMINGDALE, N.Y. 11735	UHF PLUG DATE: 10/10/83 BY: A.E.	REV: 1 PIN: 10 SPEC: 1 MTL: 1 SPEC: 1
---	--	---

SD