

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK#	First Release Drawing	01/29/13	IP
2	HK#	Correct View shape	04/19/16	IP

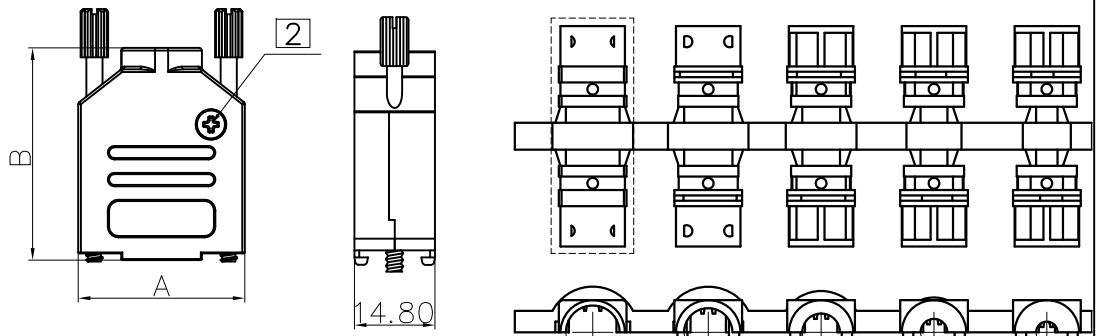

L17D TZK 09K M3.0 XX T

Cable strain relief

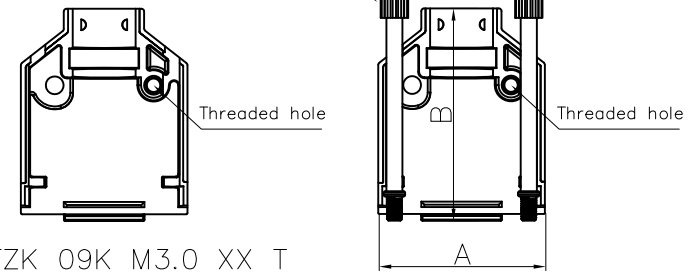

L17D TZK 09K M3.0 XX T

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated


Screws: Steel,blue zinc plating, pozi drv head

Cable strain relief: Plastic,UL94 V-0,Color Black.


Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz



Thumb screw



Screw

PRODUCT CODE

L 17DTZK XX K M3.0 XX T

- RoHS Compliance
- Series 17DTZK:180°
- Position: 09,15,25,37
- Bulk Package
- T: with threaded backshell, not self-tapping
- FM: Full steel metal screwlock / Blank: plastic knob on screwlock
- M3 Threaded

Part Number	A	B	Part Number
L17D TZK 09K M3.0 FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K M3.0 T
L17D TZK 15K M3.0 FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K M3.0 T
L17D TZK 25K M3.0 FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K M3.0 T
L17D TZK 37K M3.0 FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K M3.0 T

Customer Drawing

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES / METRIC MM

APPROVAL		DATE
DRAWN	Felix.Liu	04/19/16
CHECKED	Tony.Tang	04/19/16
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol


TITLE: Metal Hood, DTZK series


SIZE	DRAWING NO.	REV.
A4	L17DTZKXXKM3.0XXT	2


SCALE NONE SHEET 1 OF 4

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1 OF 4		







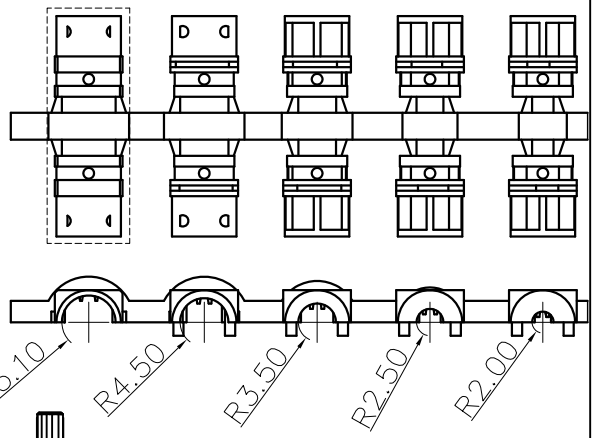


Cable strain relief

L17D TZK 15K M3.0 XX T

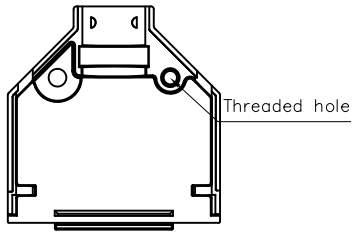


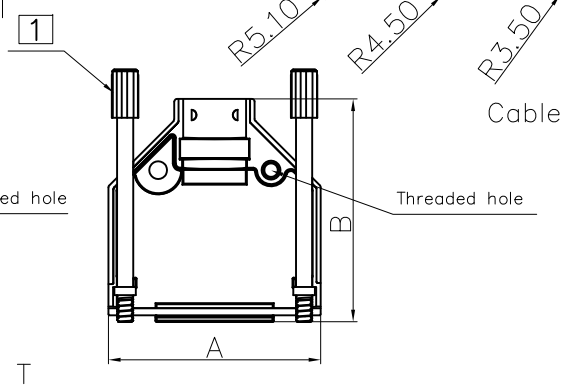

L17D TZK 15K M3.0 XX T



Thumb screw



2
Screw

Part Number	A	B	Part Number
L17D TZK 09K M3.0 FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K M3.0 T
L17D TZK 15K M3.0 FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K M3.0 T
L17D TZK 25K M3.0 FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K M3.0 T
L17D TZK 37K M3.0 FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K M3.0 T

Customer Drawing

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel,blue zinc plating, pozi drv head

Cable strain relief: Plastic,UL94 V-0,Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K M3.0 XX T

- RoHS Compliance
- Series 17DTZK:180°
- Position: 09,15,25,37
- Bulk Package
- T: with threaded backshell, not self-tapping
- FM: Full steel metal screwlock / Blank: plastic knob on screwlock
- M3 Threaded

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES / METRIC MM

APPROVAL		DATE
DRAWN	Felix.Liu	04/19/16
CHECKED	Tony.Tang	04/19/16
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol


TITLE: Metal Hood, DTZK series

SIZE	DRAWING NO.	REV.
A4	L17DTZKXXKM3.0XXT	2


SCALE NONE SHEET 2 OF 4

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1 OF 4		

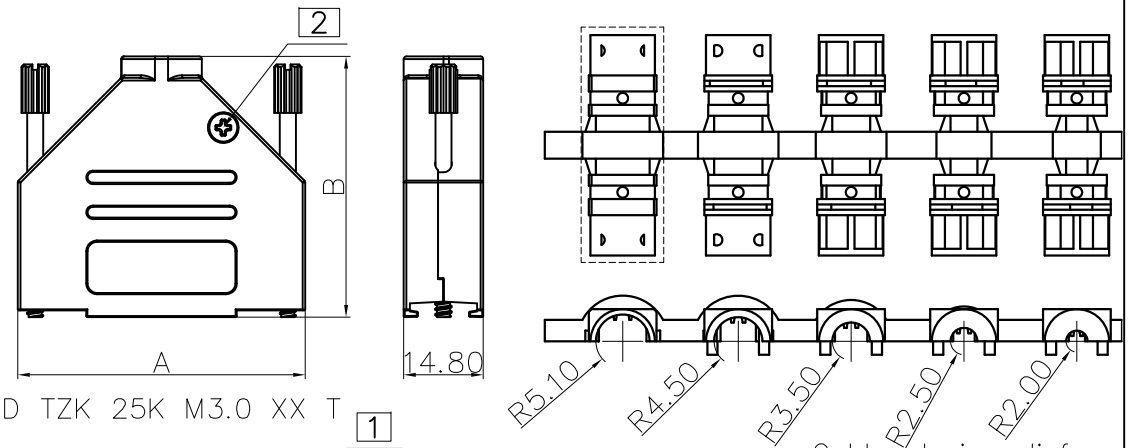


L17D TZK 25K M3.0 XX T

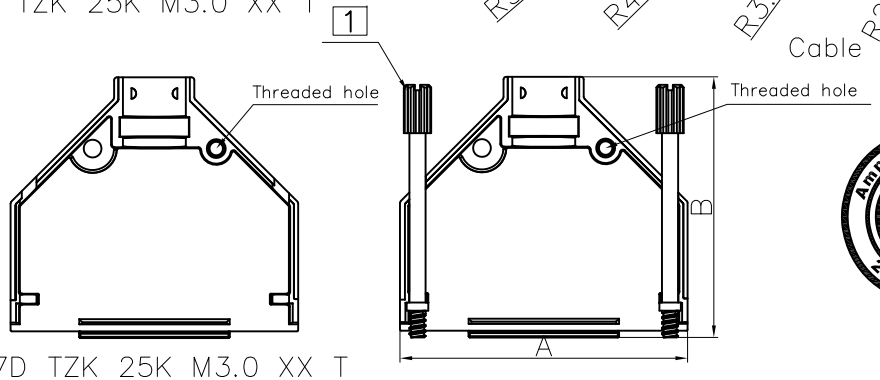

L17D TZK 25K M3.0 XX T



Thumb screw



Screw

Part Number	A	B	Part Number
L17D TZK 09K M3.0 FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K M3.0 T
L17D TZK 15K M3.0 FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K M3.0 T
L17D TZK 25K M3.0 FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K M3.0 T
L17D TZK 37K M3.0 FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K M3.0 T

Customer Drawing

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel,blue zinc plating, pozi drv head

Cable strain relief: Plastic,UL94 V-0,Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K M3.0 XX T

- RoHS Compliance
- Series 17DTZK:180°
- Position: 09,15,25,37
- Bulk Package
- T: with threaded backshell, not self-tapping
- FM: Full steel metal screwlock / Blank: plastic knob on screwlock
- M3 Threaded

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES / METRIC MM

APPROVAL		DATE
DRAWN	Felix.Liu	04/19/16
CHECKED	Tony.Tang	04/19/16
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol


TITLE: Metal Hood, DTZK series

SIZE	DRAWING NO.	REV.
A4	L17DTZKXXKM3.0XXT	2


SCALE NONE SHEET 3 OF 4

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1 OF 4		

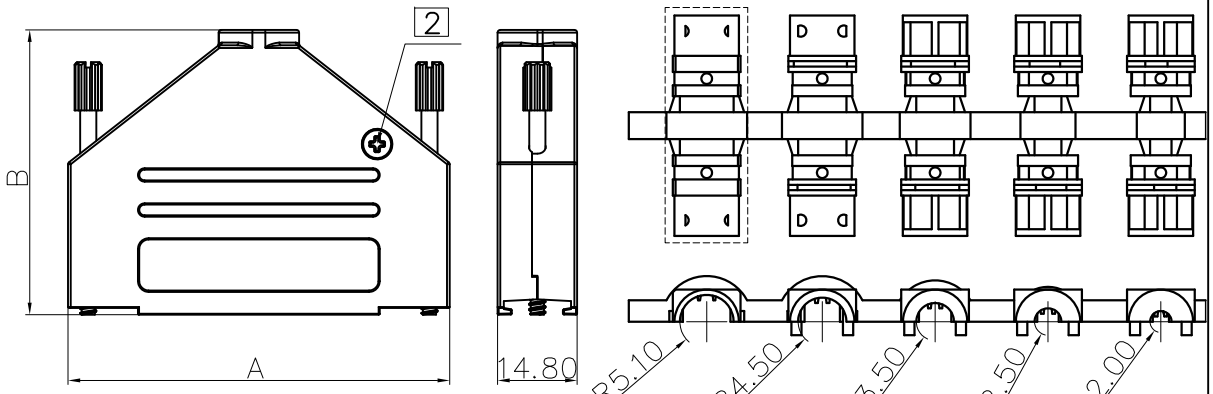


L17D TZK 37K M3.0 XX T

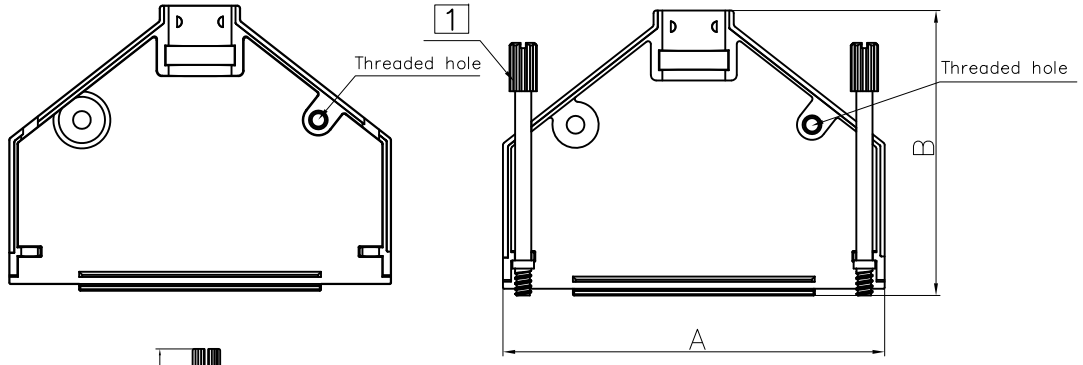

L17D TZK 37K XX T



Thumb screw



2
Screw

Part Number	A	B	Part Number
L17D TZK 09K M3.0 FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K M3.0 T
L17D TZK 15K M3.0 FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K M3.0 T
L17D TZK 25K M3.0 FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K M3.0 T
L17D TZK 37K M3.0 FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K M3.0 T

Customer Drawing

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel,blue zinc plating, pozi drv head

Cable strain relief: Plastic,UL94 V-0,Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K M3.0 XX T

- RoHS Compliance
- Series 17DTZK:180°
- Position: 09,15,25,37
- Bulk Package
- T: with threaded backshell, not self-tapping
- FM: Full steel metal screwlock / Blank: plastic knob on screwlock
- M3 Threaded

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. INCHES / METRIC MM

APPROVAL		DATE
DRAWN	Felix.Liu	04/19/16
CHECKED	Tony.Tang	04/19/16
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol

TITLE: Metal Hood, DTZK series

SIZE	DRAWING NO.	REV.
A4	L17DTZKXXKM3.0XXT	2

SCALE NONE SHEET 4 OF 4