


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

Customer Drawing

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	04/19/16	IP

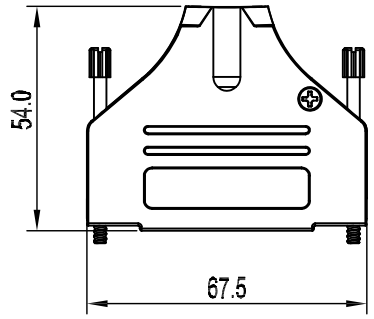



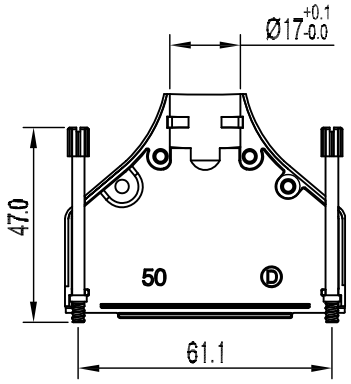

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel,pozi drv head,blue Zinc plated

Countersunk Screws: Steel,blue zinc plating.


Cable clamp: Steel,Nicked plated


Cable strain relief: Plastic,UL94 V-0,Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 17.0mm Max.

Attenuation factor: >40 dB between 30 MHz and 1 GHz

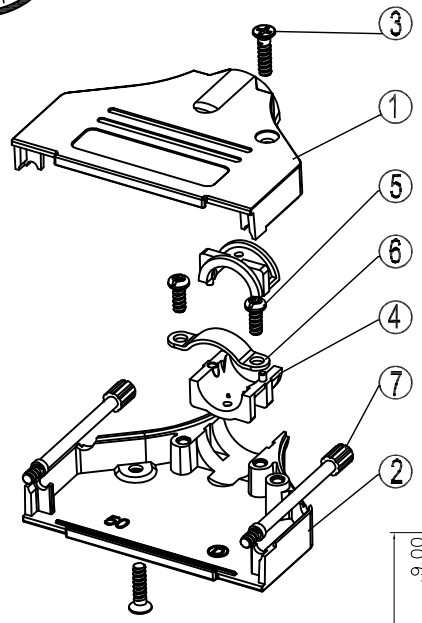

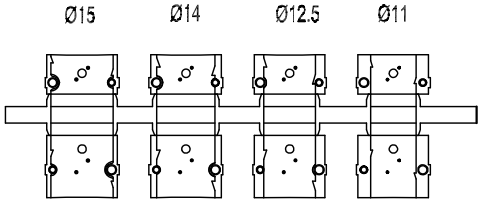


Cable strain relief


PRODUCT CODE

L 17DTZK 50 K FM T


- RoHS Compliance
- Series 17DTZK:180°
- Position:50
- Bulk Package
- T: with threaded backshell, not self-tapping type
- FM: Full steel metal screwlock




1PCS
Cable clamp



2PCS
Thumb screw



2PCS
Countersunk screw



2PCS
Screw

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. / METRIC	APPROVAL	DATE	Amphenol
.X +/- 0.50 / .XX +/- 0.30 / .XXX +/- 0.20 / FRACTIONS +/- / ANGLES +/- 2°	DRAWN Felix.Liu	04/19/16	
FOR MATERIALS AND FINISHES SEE NOTES	CHECKED Tony.Tang	04/19/16	
REMOVE SHARP EDGES	CHECKED		TITLE: Metal Hood, 50Way DTZK series
DIMENSIONS U.S. INCHES / METRIC MM	DRAWING FILE :		SIZE A4 / DRAWING NO. L17DTZK50KFMT / REV. 1
	ANGLE OF PROJECTION		SCALE NONE / SHEET 1 OF 1