

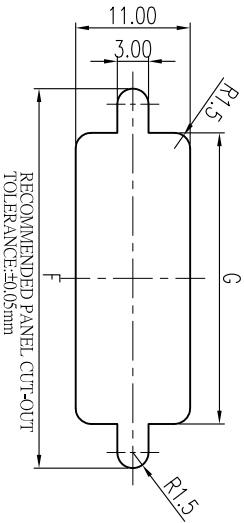
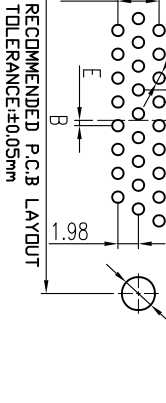
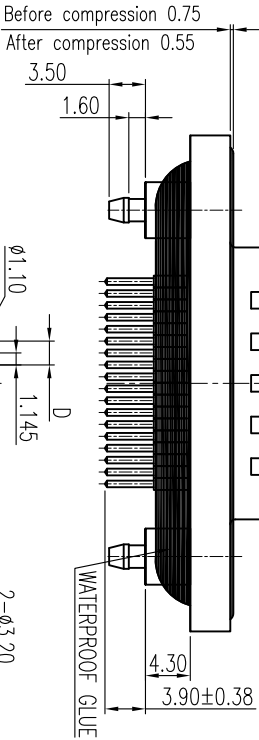
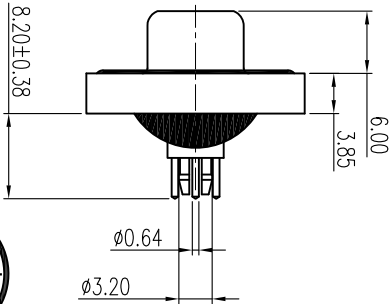


This document is the property of Amphenol Corporation and is delivered on the understanding that it is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior consent, in writing, of Amphenol Corporation. It is to be used only for the purpose for which it is issued.


Customer drawing

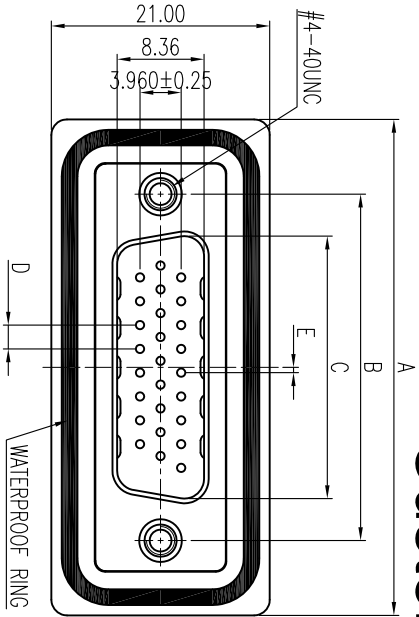

NO.	A	B	C	D	E	F	G
1SP	39.40	24.99	16.92	2.29	0.25	28.20	20.00
26P	47.70	33.32	25.25	2.29	0.51	36.50	28.00
44P	64.50	47.04	38.96	2.29	0.51	51.00	41.50

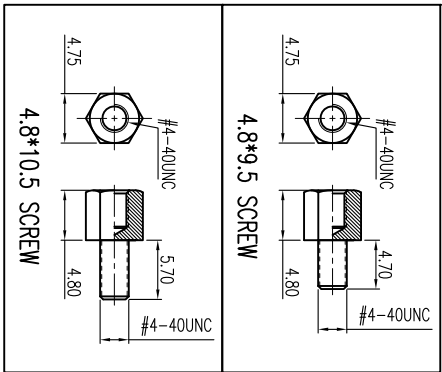

PANEL THICKNESS



Screw L=4.7 For Panel Thickness

Under 1.2mm

Screw L=5.7 For Panel Thickness

Between 1.2~2.0mm


REVISONS			
S/N	ECN	DESCRIPTION	DATE
1	HK--	First Release Drawing	01/07/15
2	HK--	Update Drawing	05/20/17
3	HK--	Update Drawing	11/01/17

D-SUB TECHNICAL DATA

SHELL : SPCC. 80u" min nickel over 50u" min copper
BODY : PBT, UL 94V-0, Color:Black.
CONTACTS : Copper Alloy, Full gold plated over 50u" min nickel
WATERPROOF RING: Silica Gel.
WATERPROOF GLUE: Epoxy.
BOARDLOCK : Copper Alloy, Tin Plated.
SCREW : Copper Alloy, Nickel Plated.
ELECTRICAL : Voltage rating : 250 VAC(RMS)
Current rating : 5 Ampere per Contact
Withstanding Voltage: 1000V AC(RMS)
Insulation Resistance : 1000 Megohms Min.
Contact Resistance : 10 Milliohms Max.
Waterproof Rate: IP 67 Min.
MARKING :
Amphenol
Manufacturing date

PRODUCT CODE

L17 EHDXXP2X

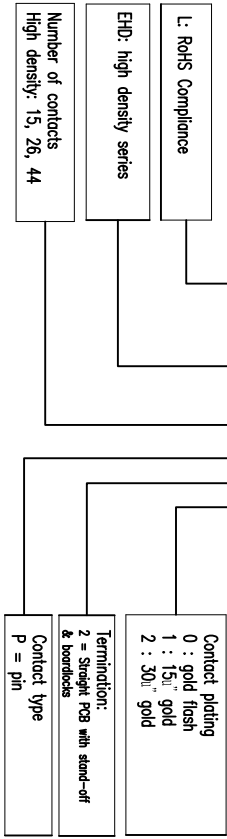

DIMENSIONS SPECIFIED			
TOLERANCES	U.C.	APPROVAL	DATE
LENGTH	0.50	DRAWN	DATE
WIDTH	0.50	CHECKED	DATE
HEIGHT	0.50	DESIGNED	DATE
DIAMETER	0.50	ENGINEER	DATE
ANGLE	±0.5°	MANAGER	DATE
REMOVE SHARP EDGES			
DIMENSIONS IN INCHES			
ANGLE OF PROJECTION			
TITLE			
D-sub,waterproof series			
SIZE DRAWING NO.			
A4 L17EHDXXP2X			
SCALE NONE			
SHEET 1 OF 1			