


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

Customer drawing

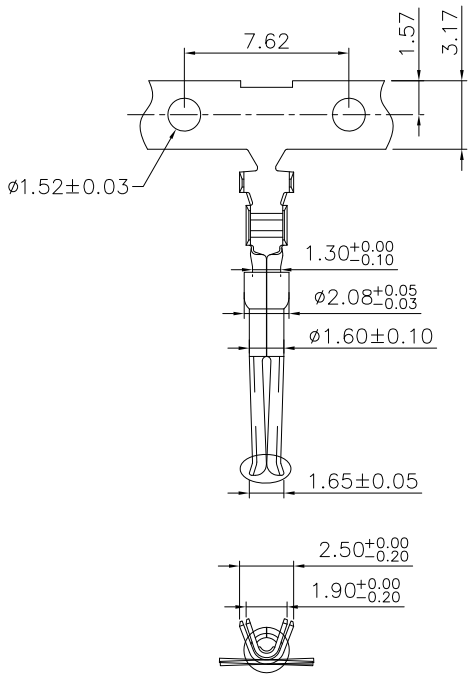


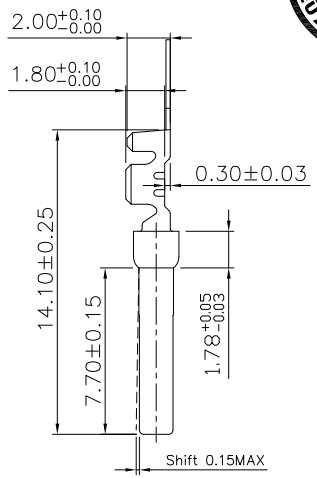

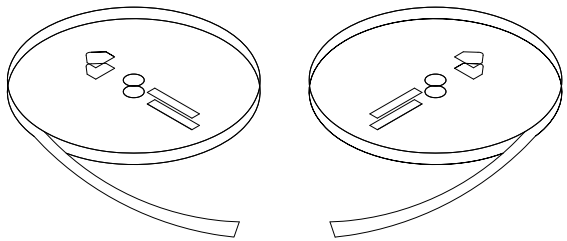

Counterclockwise(left hand feed) winding

Clockwise (right hand feed) winding

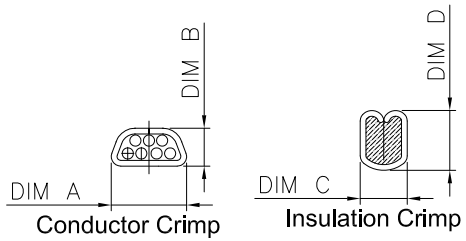

For reference only
Strip Length:2.8mm
Acceptance Insulation OD:1.2~2.0mm

24 AWG	1.4	1.3	1.7	1.7
22 AWG	1.6	1.5	1.9	1.9
20 AWG	1.8	1.7	2.1	2.1
WIRE RANGE	DIM A	DIM B	DIM C	DIM D

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
2	HK--	Update Drawing	12/18'18	IP
3	HK--	Add crimp specifications	04/03'19	IP
4	HK--	Add crimping dimensions	09/23/19	IP
5	HK--	Add 2G packaging	03/07'23	Tony.Tang

MATERIAL: Brass(C2680-EH)

PRODUCT CODE

L 17RR D1 F XX XXX

- L: RoHS Compliance
- Standard Density
- Wire size: 20 to 24 AWG
- Contact type: F=Female
- Packaging: 100=Bulkpack unit(100 cts); 400=Reel of 400 cts (Left feed reel); 2K=Reel of 2000 cts (Right feed reel); 2G=Reel of 2000 cts (Left feed reel); 10K=Reel Of 10000 cts (Right feed reel); 10G=Reel of 10000 cts (Left feed reel)
- Full Gold Plating: 01=Flash gold; 02=0.4u(15u") 04= 0.76u(30u")
- Selective gold Plating: 11=Flash gold +2um(78u")Sn; 12=0.4u(15u") +2um(78u")Sn; 14=0.76u(30u") +2um(78u")Sn

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		5°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS
U.S. INCHES
METRIC MM

APPROVAL		DATE
DRAWN	Bella.Wu	03/07'23
CHECKED	Tony.Tang	03/07'23
CHECKED		
DRAWING FILE :		
ANGLE OF PROJECTION		

Amphenol

TITLE: Crimping Contact, Female

SIZE	DRAWING NO.	REV.
A4	L17RRD1FXXXXX	5
SCALE NONE		SHEET 1 OF 1