

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	06/08/12	IP

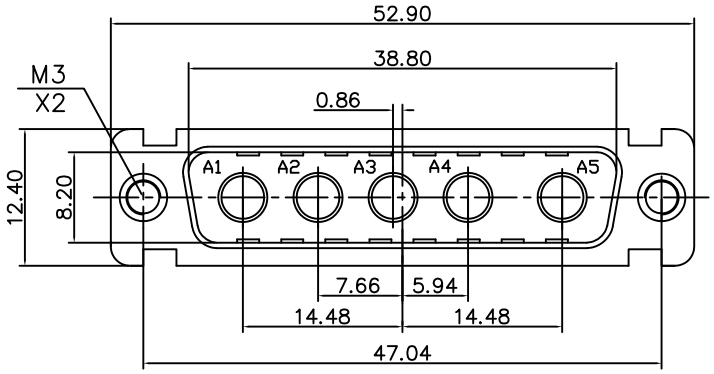

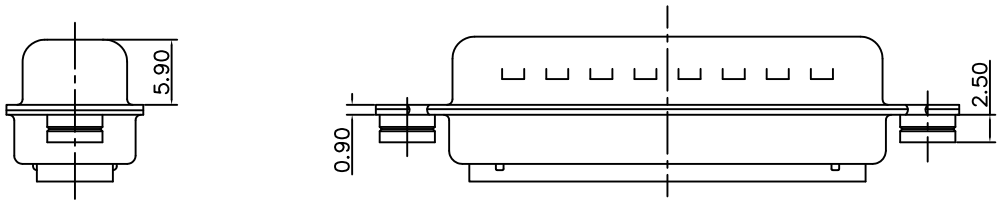

Customer Drawing

D-SUB TECHNICAL DATA

SHELL :	Steel, 2.5um(100u") min tin over 1.25um(50u") min nickel
BODY :	Glass filled thermoplastic. Flame retardant to UL94 V-0, Color black
REAR INSERT :	Brass, 100u" min tin over 50u" min nickel
ELECTRICAL :	Withstanding Voltage >1000 V RMS at 50 Hz for one minute Insulation resistance >5000 M Ohms
CLIMATIC :	Temperature range -55 °C up to +155°C
MARKING :	Amphenol-...(Series No.) Manufacturing date Commercial reference

PRODUCT CODE

L 717TW B 5W5 P 3R

- L: RoHS Compliance
- 717TW: tin plated shell with dimples
- Shell Size: B
- Configuration: 5W5
- Contact type: P: Male
- 3R:Rear insert M3

UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVAL	DATE	Amphenol
U.S. / METRIC	DRAWN Mary.Ma	06/08/12	
.X +/- 0.50	CHECKED Tony.Tang	06/08/12	
.XX +/- 0.30	CHECKED		TITLE: Hybrid connector, TW series
.XXX +/- 0.20	DRAWING FILE : Drawing/Daub/C L717TWB5W5P3R-1		
FRACTIONS +/- / ANGLES +/- 5°	ANGLE OF PROJECTION		SIZE A4 / DRAWING NO. C L717TWB5W5P3R / REV. 1
FOR MATERIALS AND FINISHES SEE NOTES			SCALE NONE / SHEET 1 OF 1
REMOVE SHARP EDGES			
DIMENSIONS U.S. INCHES / METRIC MM			