REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.03 To Rev.A
B	C221951	2022-12-16	Ruru	△B X1

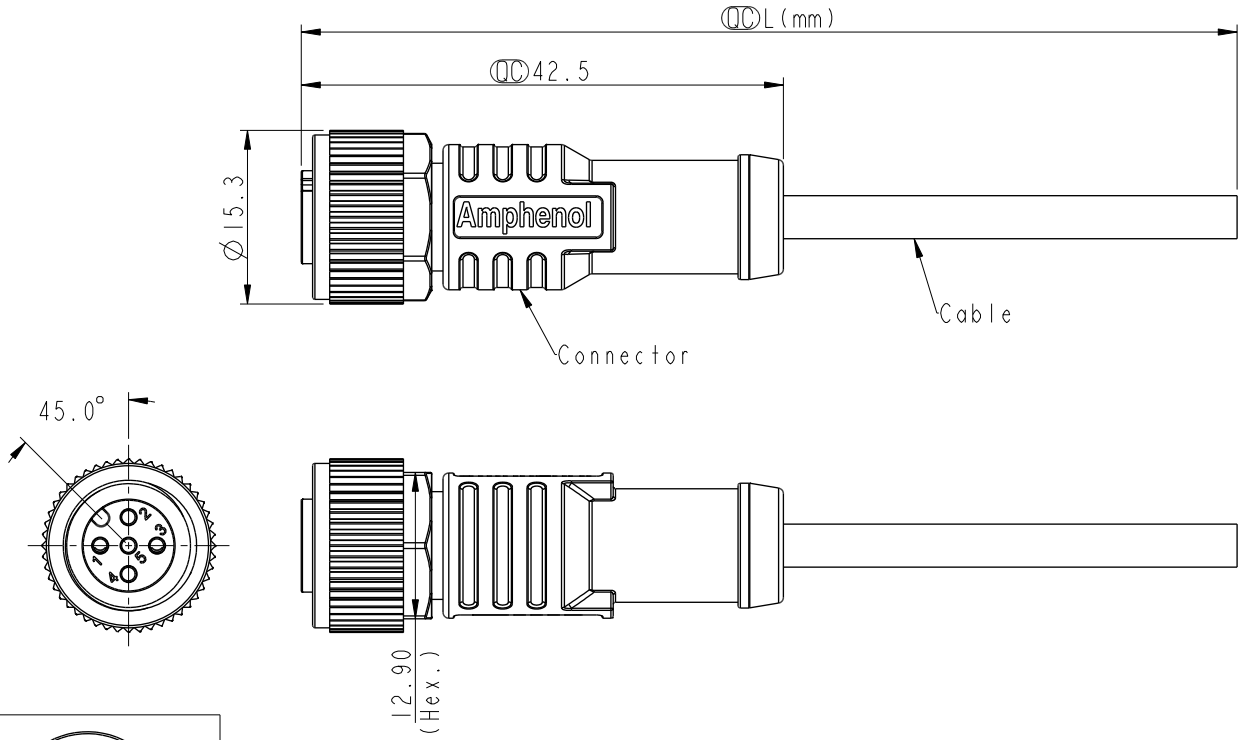

MI2A-XXBFFM-SL8CXX

XX:No. Of Pin

XX:01~15Meters
01:01Meter
02:02Meters
:
15:15Meters



2Pin

Pin#	Wire
3	White 白
1	Blue 藍

Pin Assignments
Front View

Note:
* RoHS Compliant
* QC Important dimension
△B * Waterproof rate: IP68, mated 1m/24h
IP69K, mated
* Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
Nut: Metal
Outer mold: Thermoplastic, Black
* Cable: IEC61156-12, 26#*IP+AL/MY+B, OD=3.8mm,
PUR Jacket, Green
* Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 15M: ±200 mm

UNIT:mm

TOLERANCE
±0.5mm

TITLE: N SEN, MI2 A, SCREW
CABLE W/O SR, F, F, MOLDING

SCALE 3:2 | SIZE A4 | SHEET 1 OF 1
REV. B | WC-REV. A.1 | QC:Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY Allen Pan	DATE 2021-08-27
DWG NO MI2A-XXBFFM-SL8CXX		CHECKED BY Sam Ho	DATE 2021-08-27
CUSTOMER ALTW		APPROVED BY Fred Lee	DATE 2021-08-27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.