


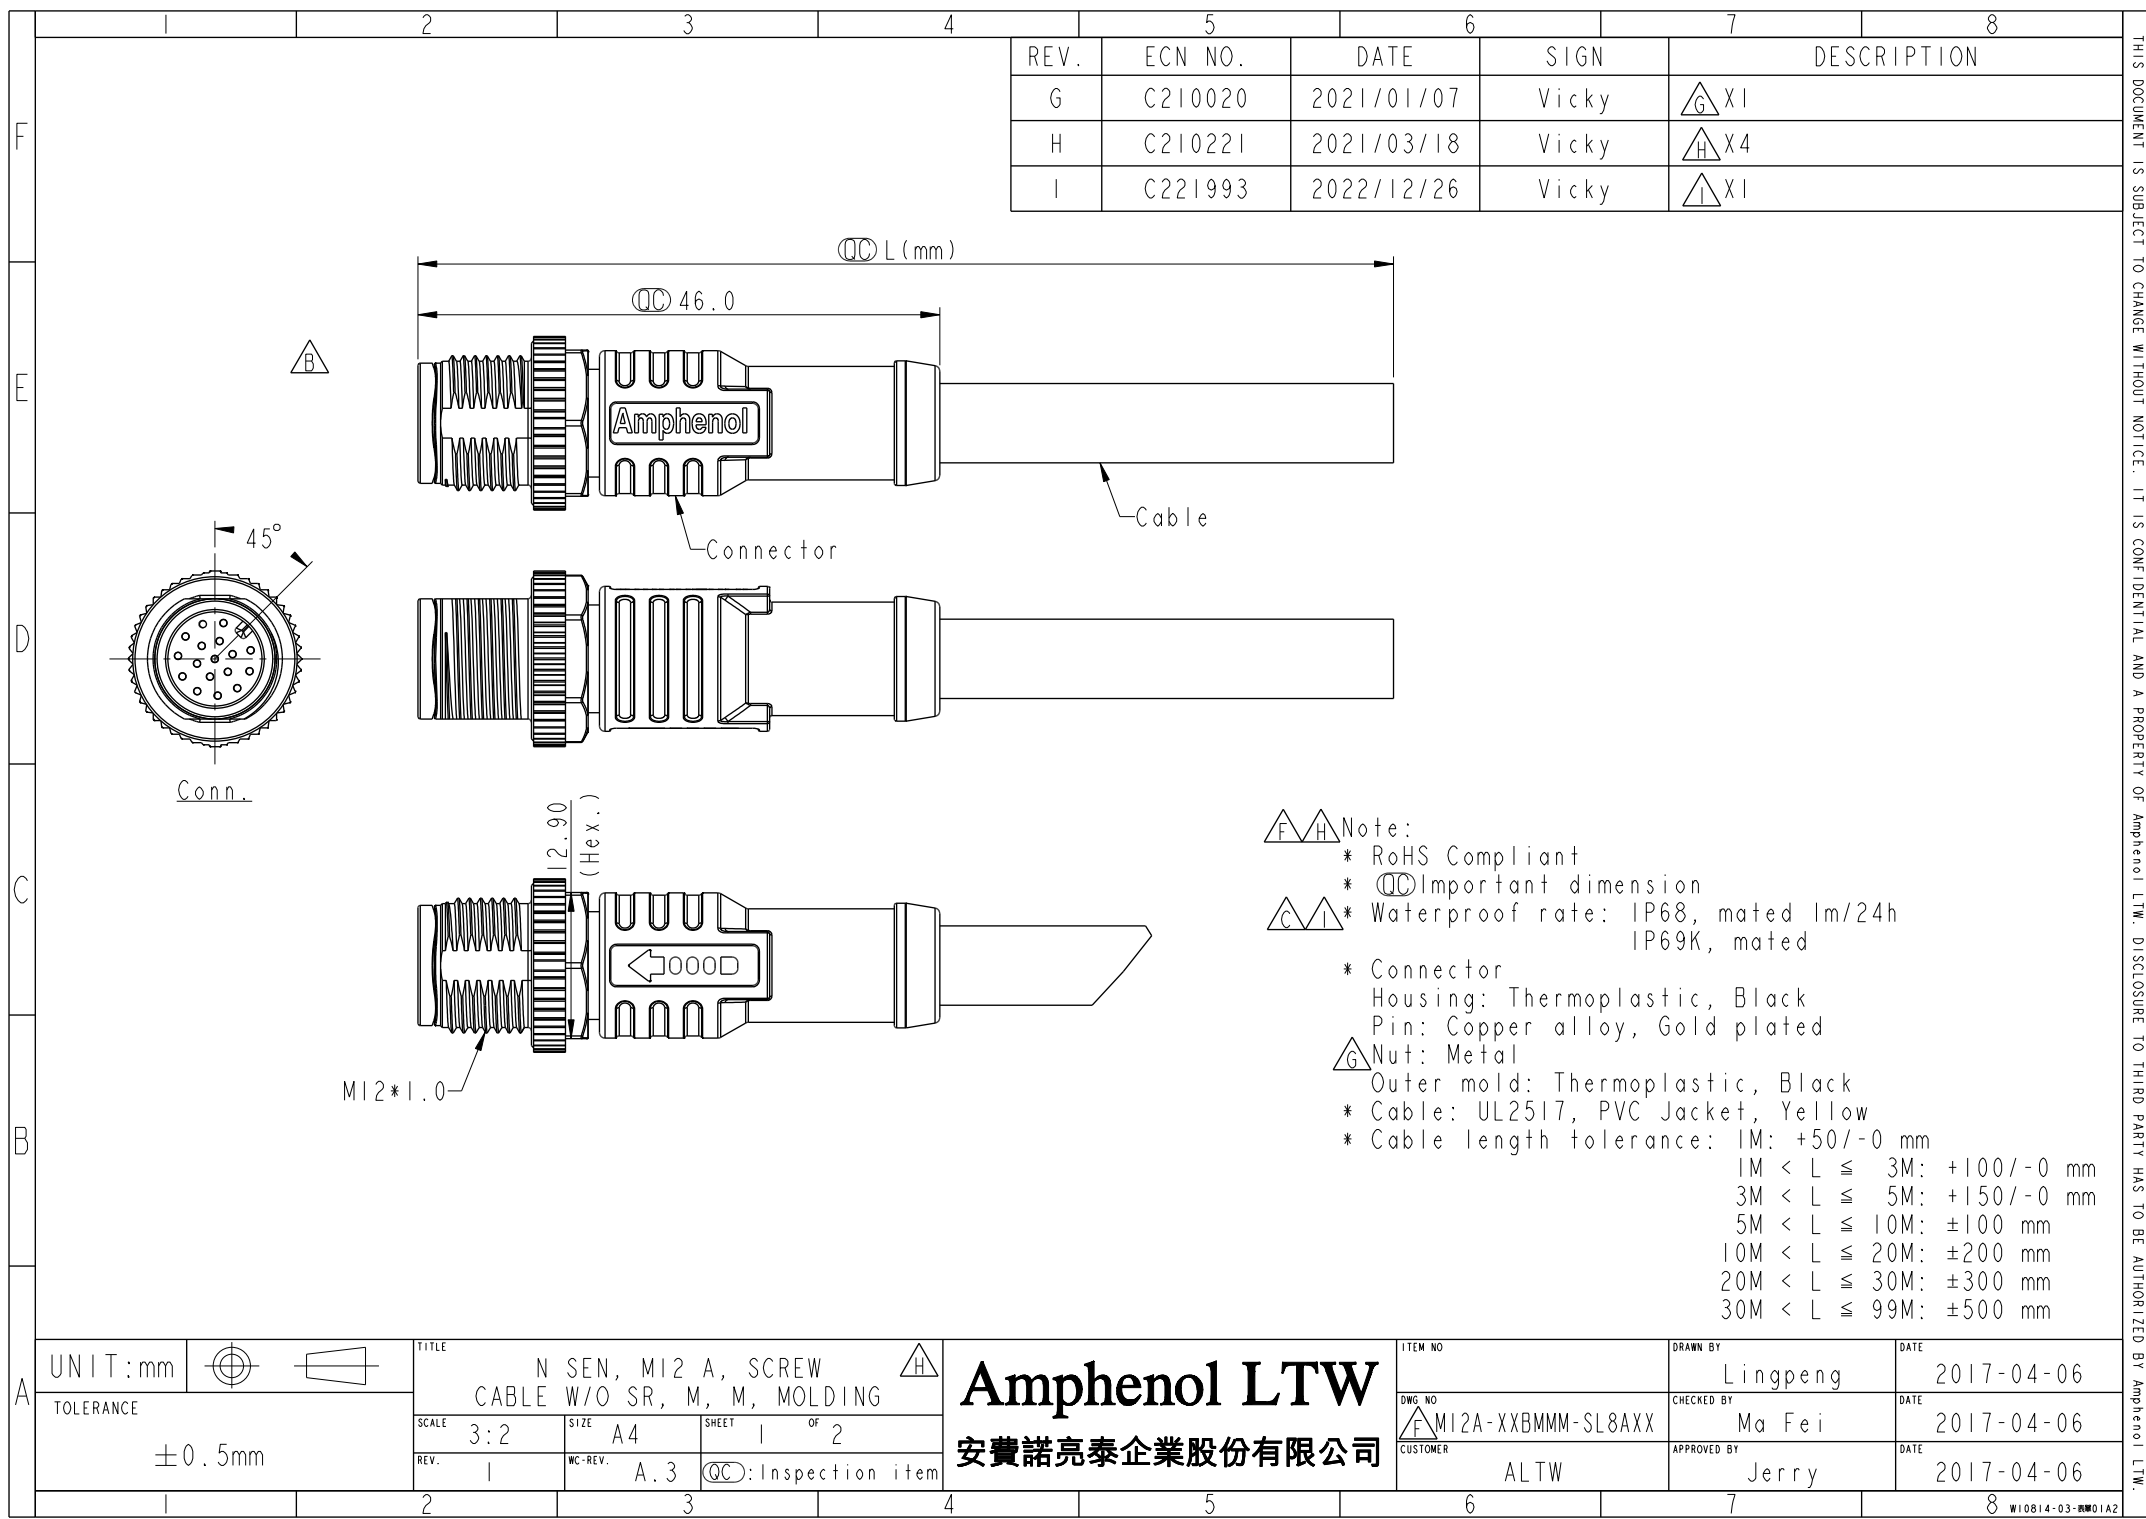

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
G	C210020	2021/01/07	Vicky	 X1
H	C210221	2021/03/18	Vicky	 X4
I	C221993	2022/12/26	Vicky	 X1

-  Note:
- * RoHS Compliant
 - *  Important dimension
 - *  Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
 - *  Nut: Metal
Outer mold: Thermoplastic, Black
 - * Cable: UL2517, PVC Jacket, Yellow
 - * Cable length tolerance: 1M: +50/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT:mm			TITLE	
TOLERANCE	N SEN, M12 A, SCREW CABLE W/O SR, M, M, MOLDING			
±0.5mm	SCALE	SIZE	SHEET	OF
	3:2	A4	1	2
	REV.	WC-REV.	 :Inspection item	
	1	A.3		

ITEM NO	DRAWN BY	DATE
	Lingpeng	2017-04-06
DWG NO	CHECKED BY	DATE
 M12A-XXBMMM-SL8AXX	Ma Fei	2017-04-06
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2017-04-06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Amphenol LTW
安費諾亮泰企業股份有限公司

安費諾亮泰企業股份有限公司