
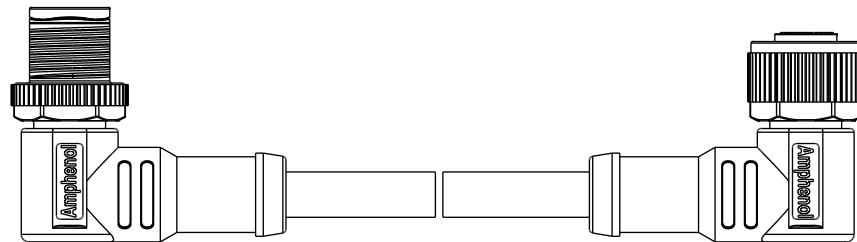
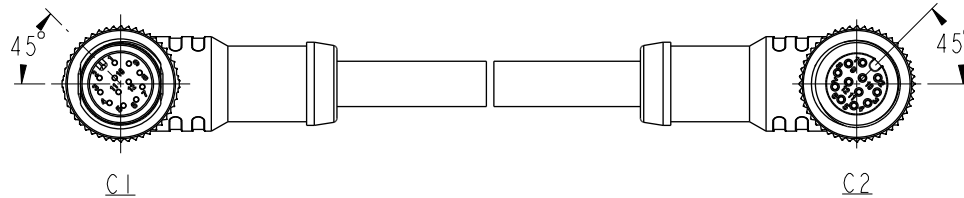


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201735	2020/11/10	Ruru	 X5
C	C210229	2021/04/01	Vicky	 X4
D	C222004	2022/12/28	Vicky	 X2

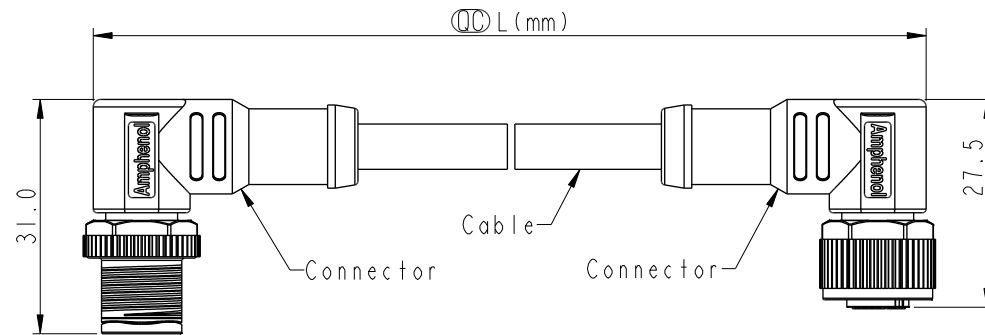

Note:

- * RoHS Compliant
- * **QC** Important dimension

* C I

Waterproof rate: IP68, mated 1m/24h

IP69K, mated

Housing: Thermoplastic, Black

Pin: Copper alloy, Gold plated

Nut: Metal

Outer Mold: Thermoplastic, Black

* C2

 Waterproof rate: IP68, mated 1m/24h

IP69K, mated

Housing: Thermoplastic, Black

Pin: Copper alloy, Gold plated

O-Ring: Rubber, Green

Nut: Metal

Outer Mold: Thermoplastic, Black

* Cable: UL2517, PVC Jacket, Black

* Cable Length Tolerance:

0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

$$1M < L \leq 3M: +120/-0 \text{ mm}$$
$$3M < L \leq 5M: +160 / -0 \text{ mm}$$

5M < L ≤ 10M; ±100 mm

10M < L ≤ 20M: ±200 mm

20M < | ≤ 30M: ±300 mm

30M < l ≤ 99M: ±500 mm

UNIT:mm			TITLE ACC, SEN, A Code, DB-ENDED MF				ITEM NO		DRAWN BY Vicky		DATE 2018-12-07			
TOLERANCE ±0.5mm			SCALE 1:1				SIZE A4		SHEET 1 OF 2		DWG NO M12AXXMR-12AFR-SDXXX		CHECKED BY Rita	
			REV. D		WC-REV.		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2018-12-07	

