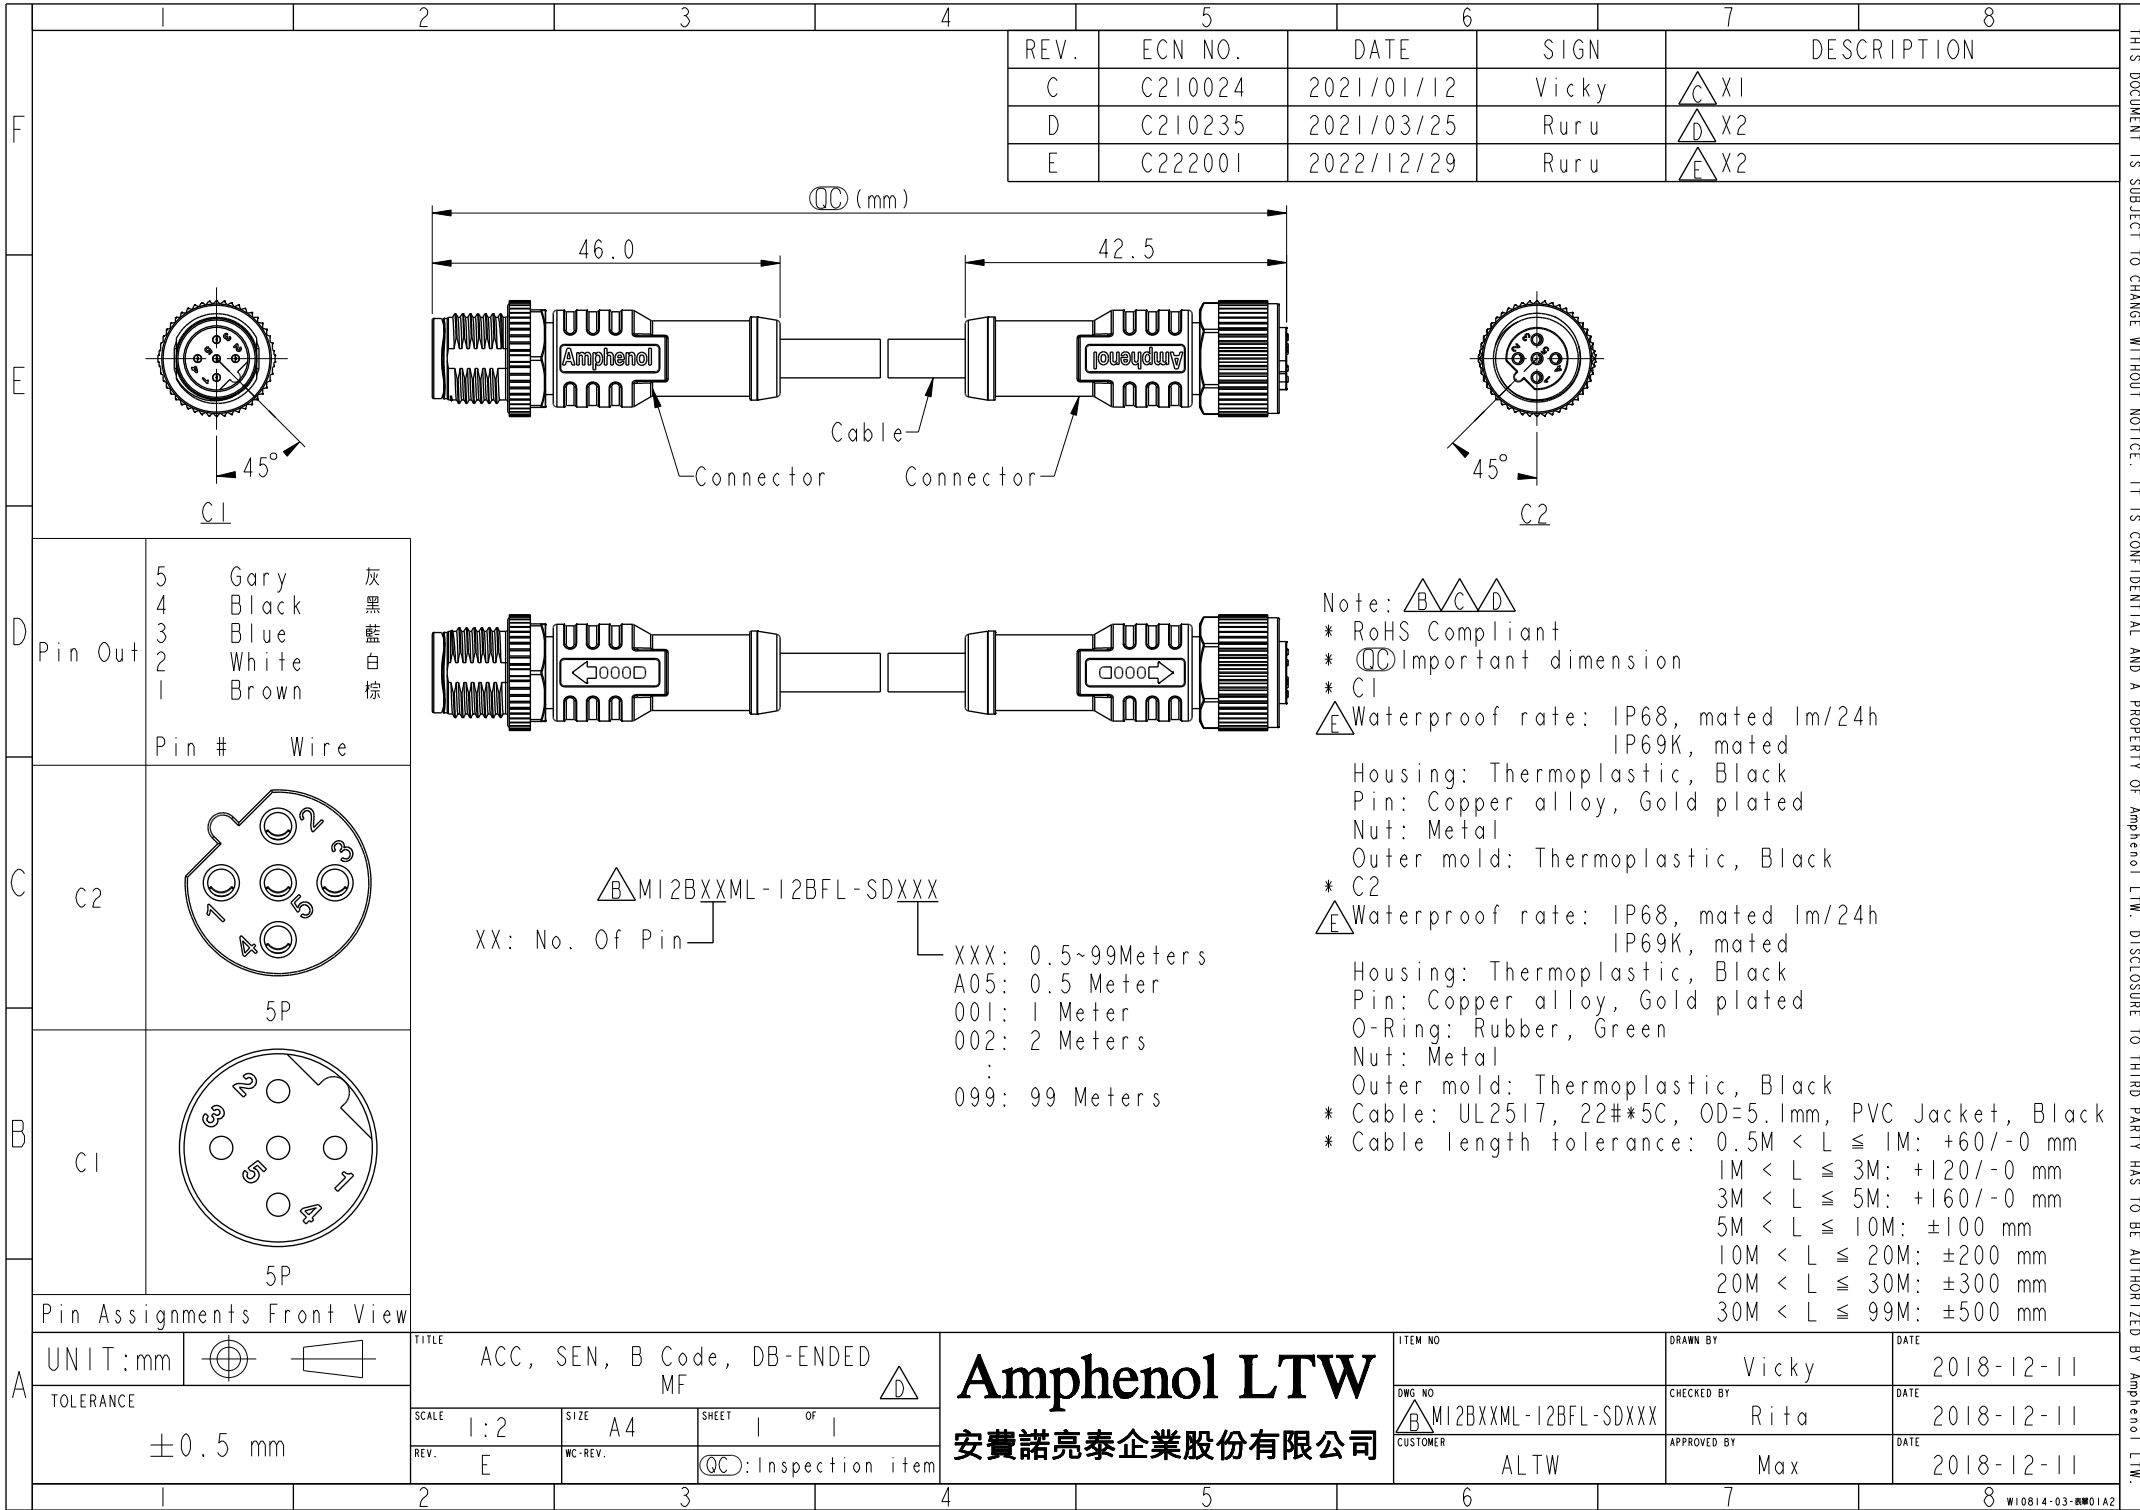
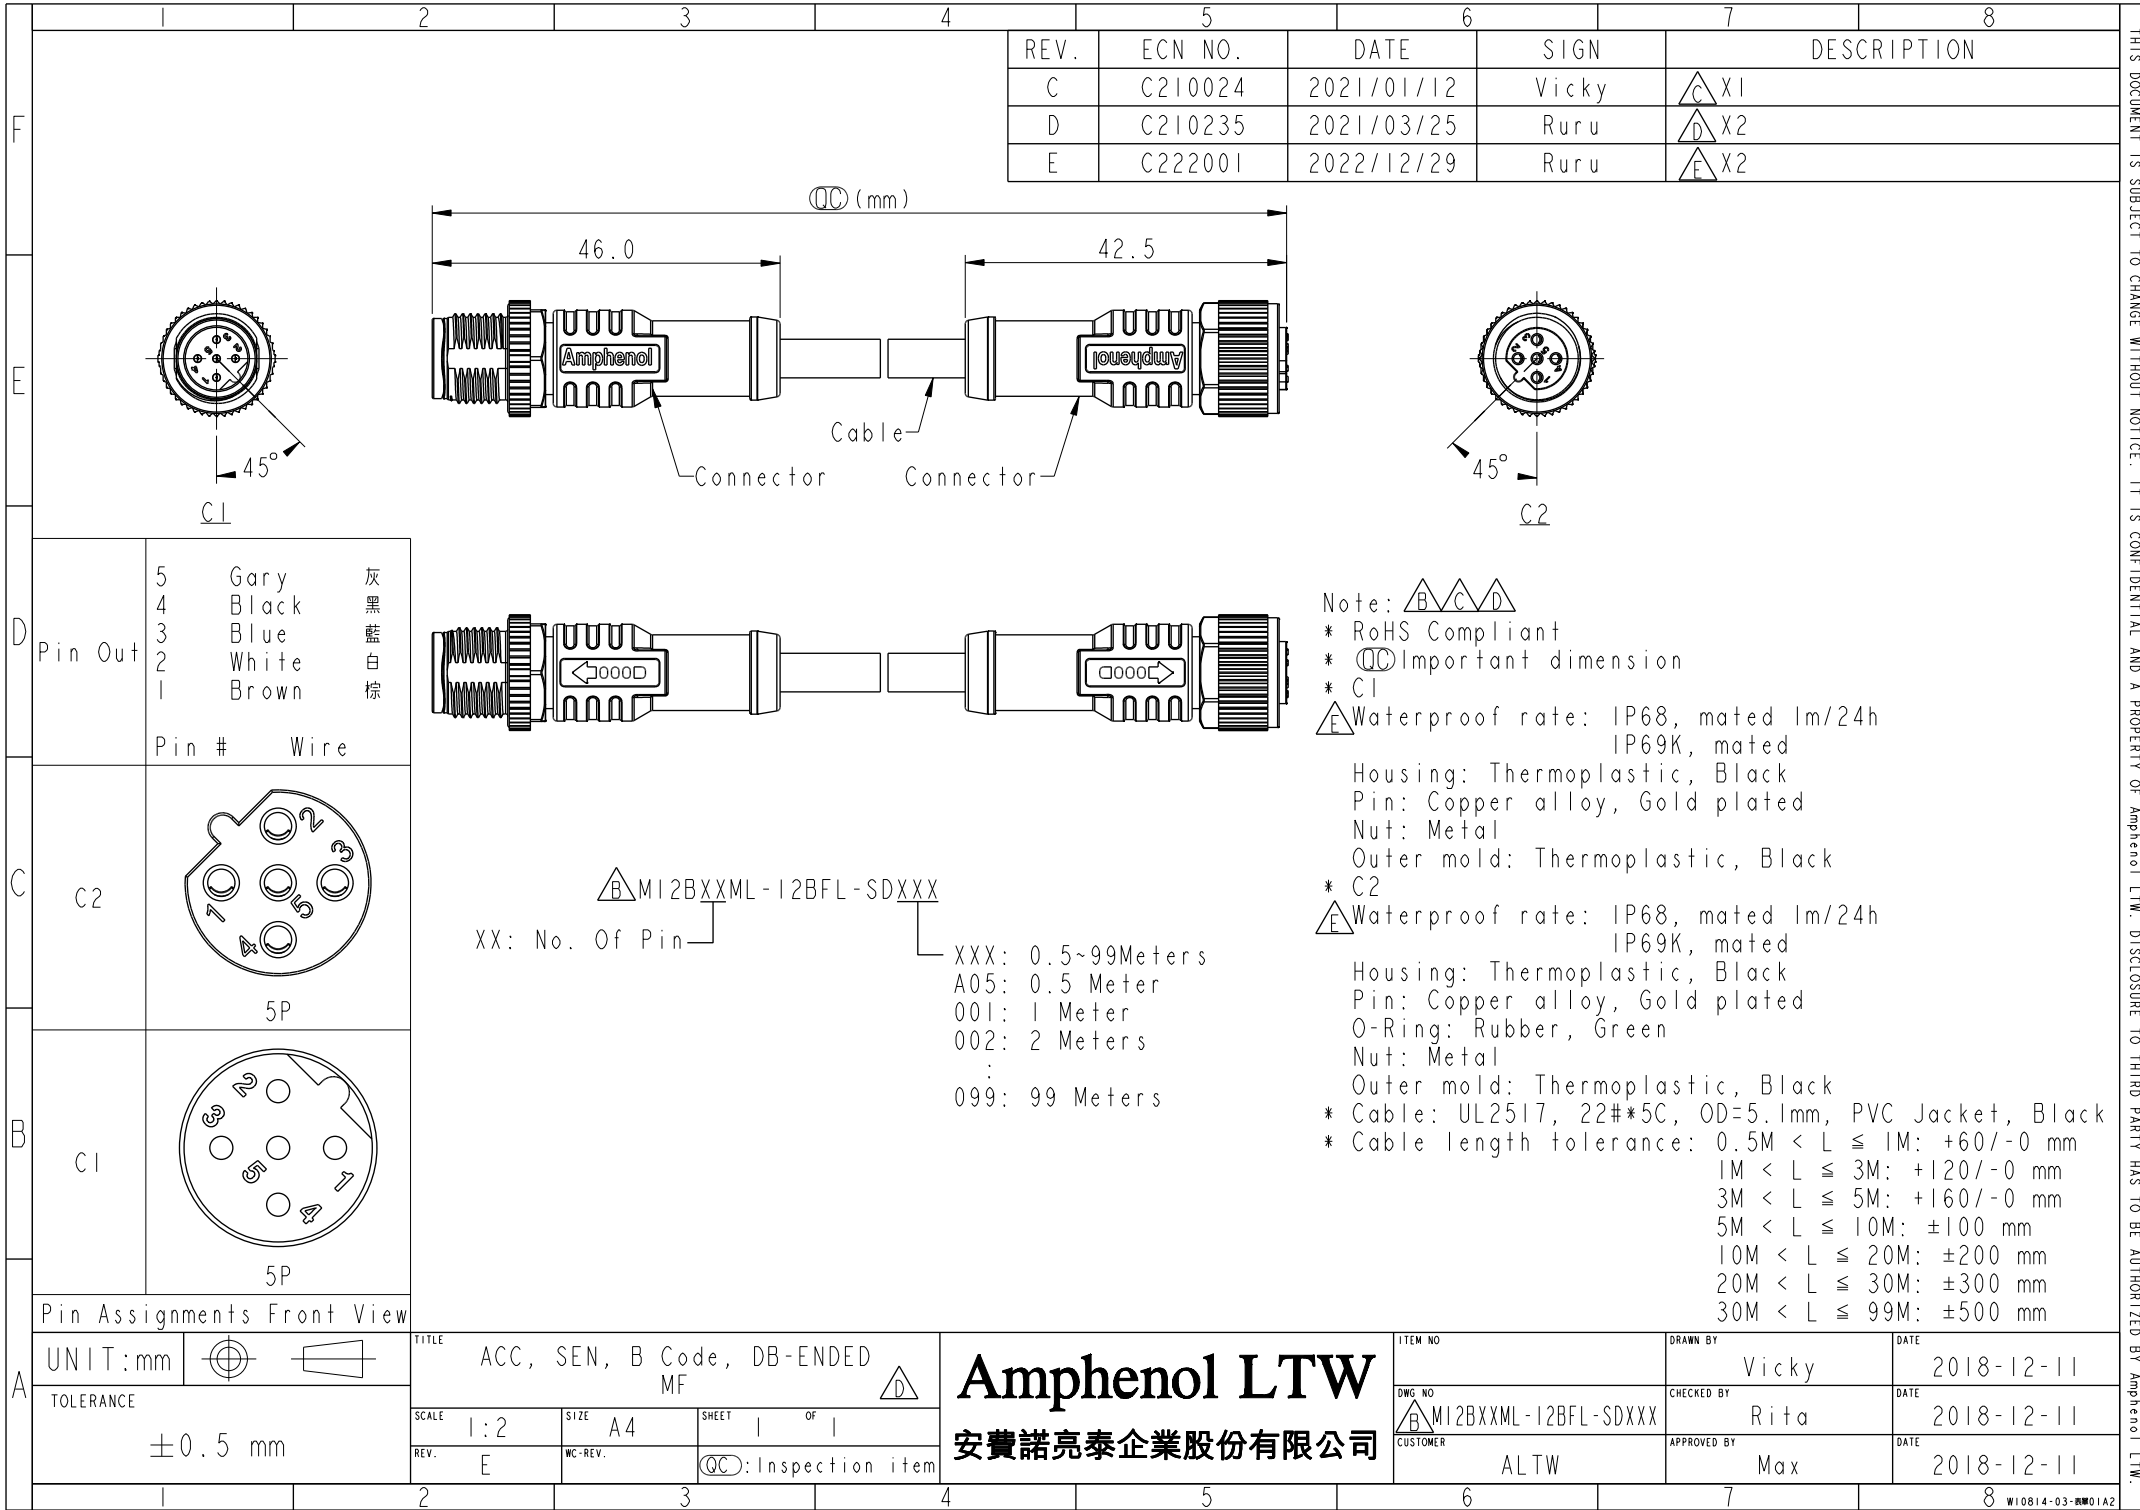
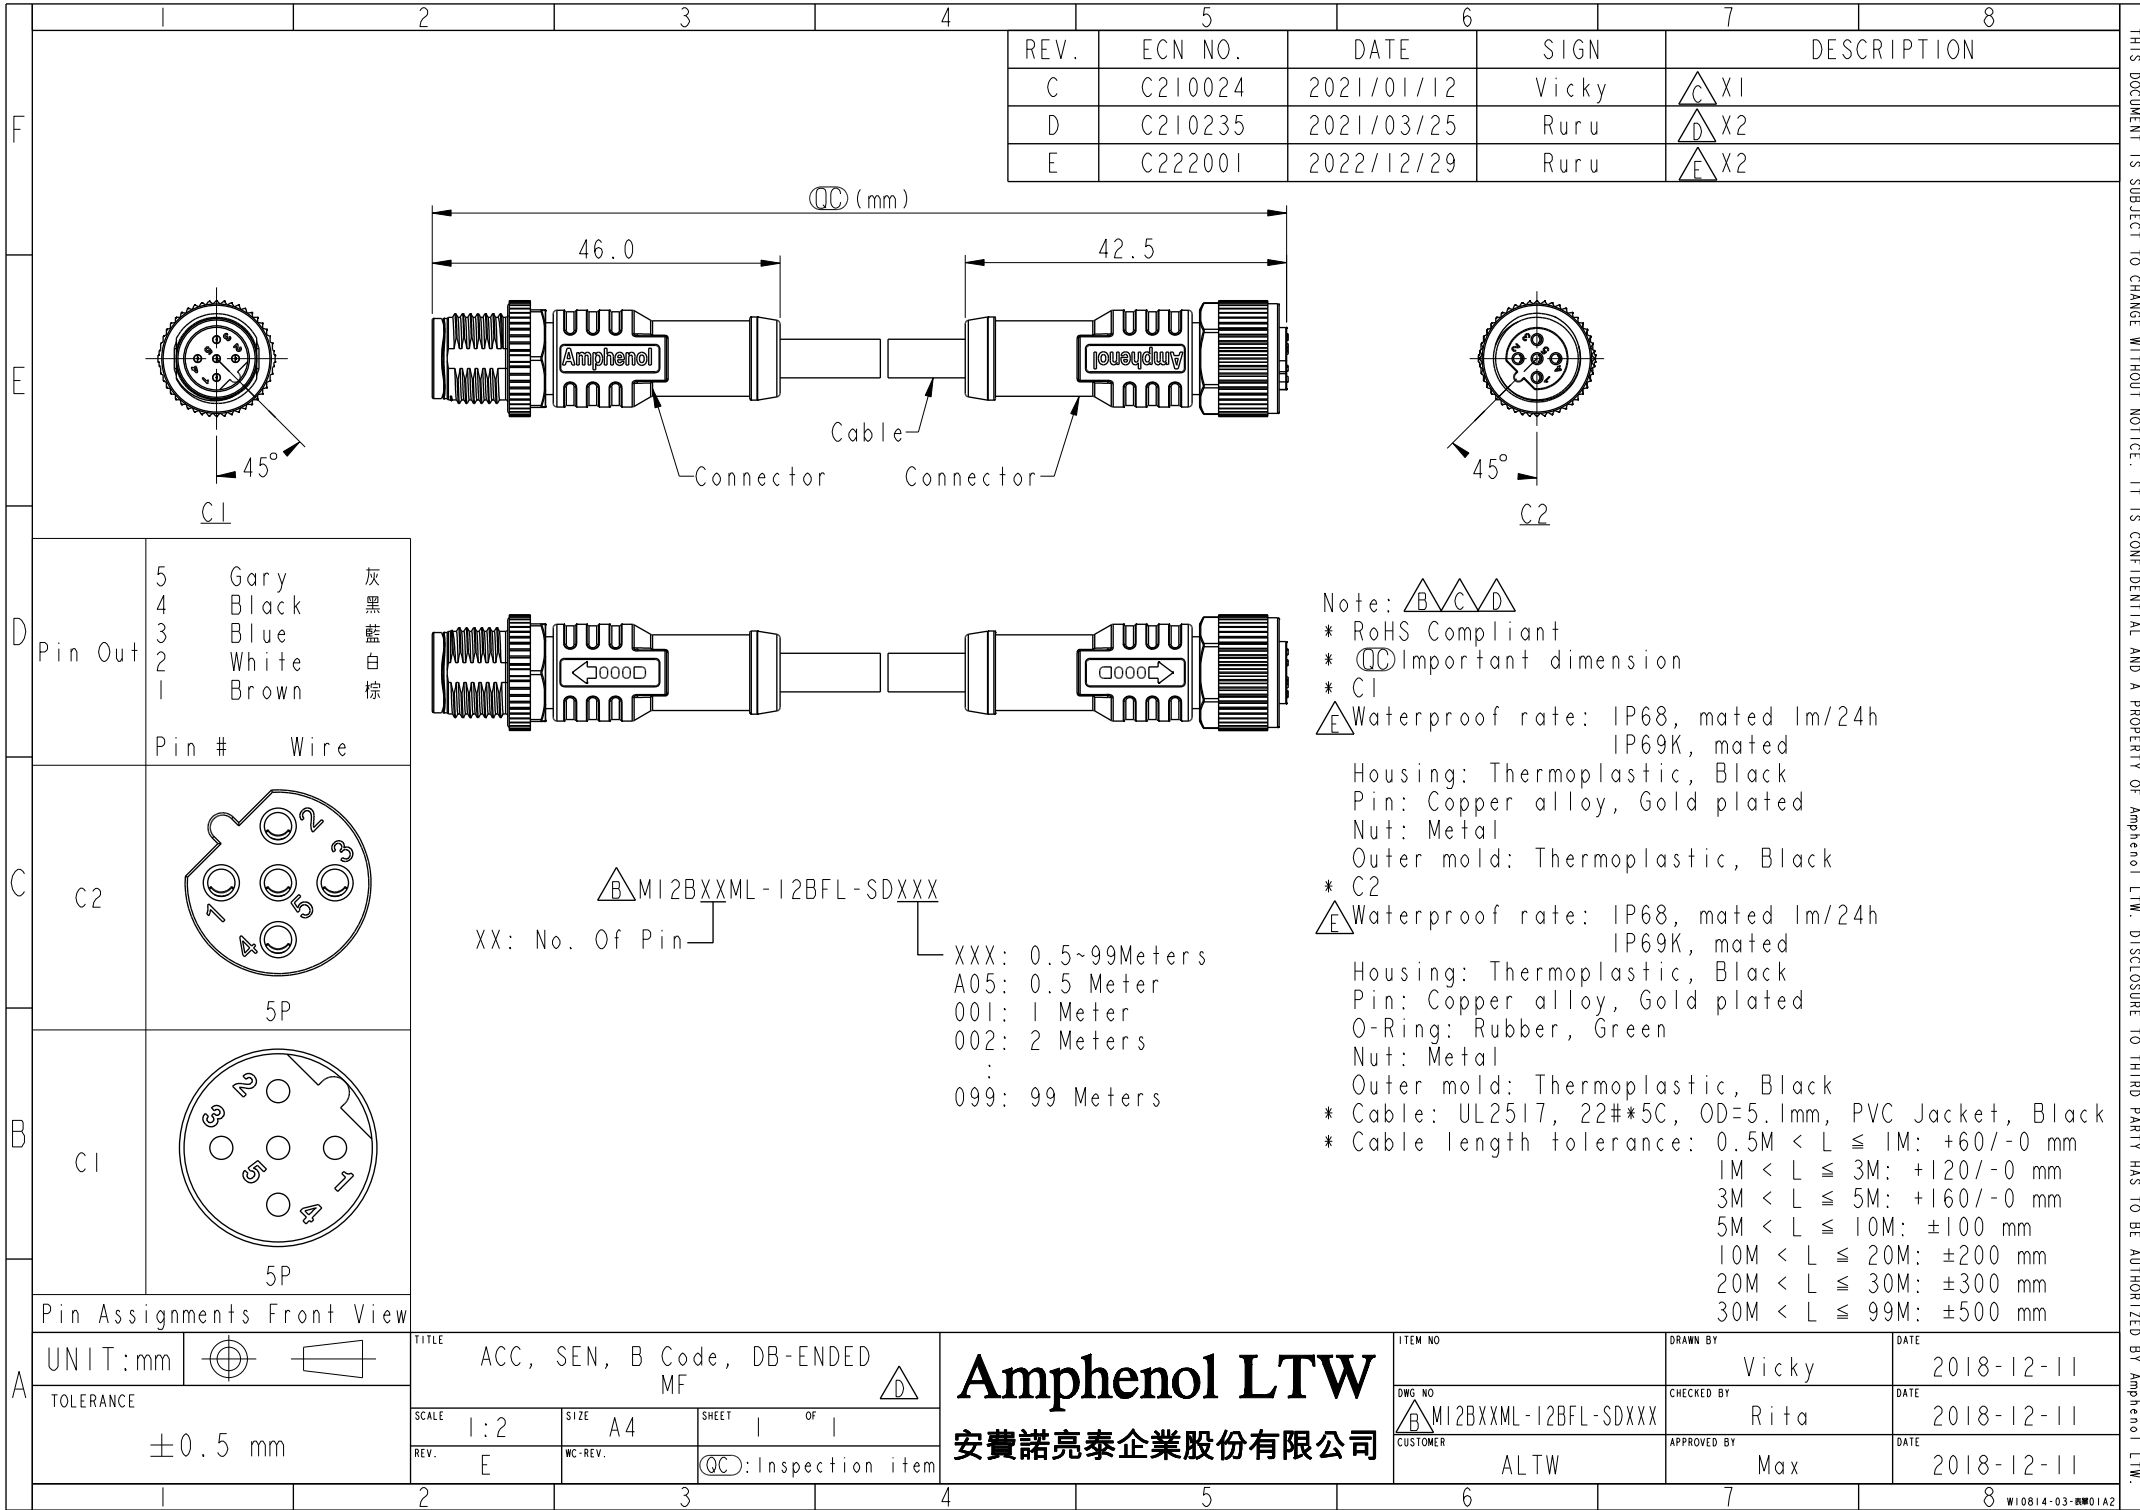
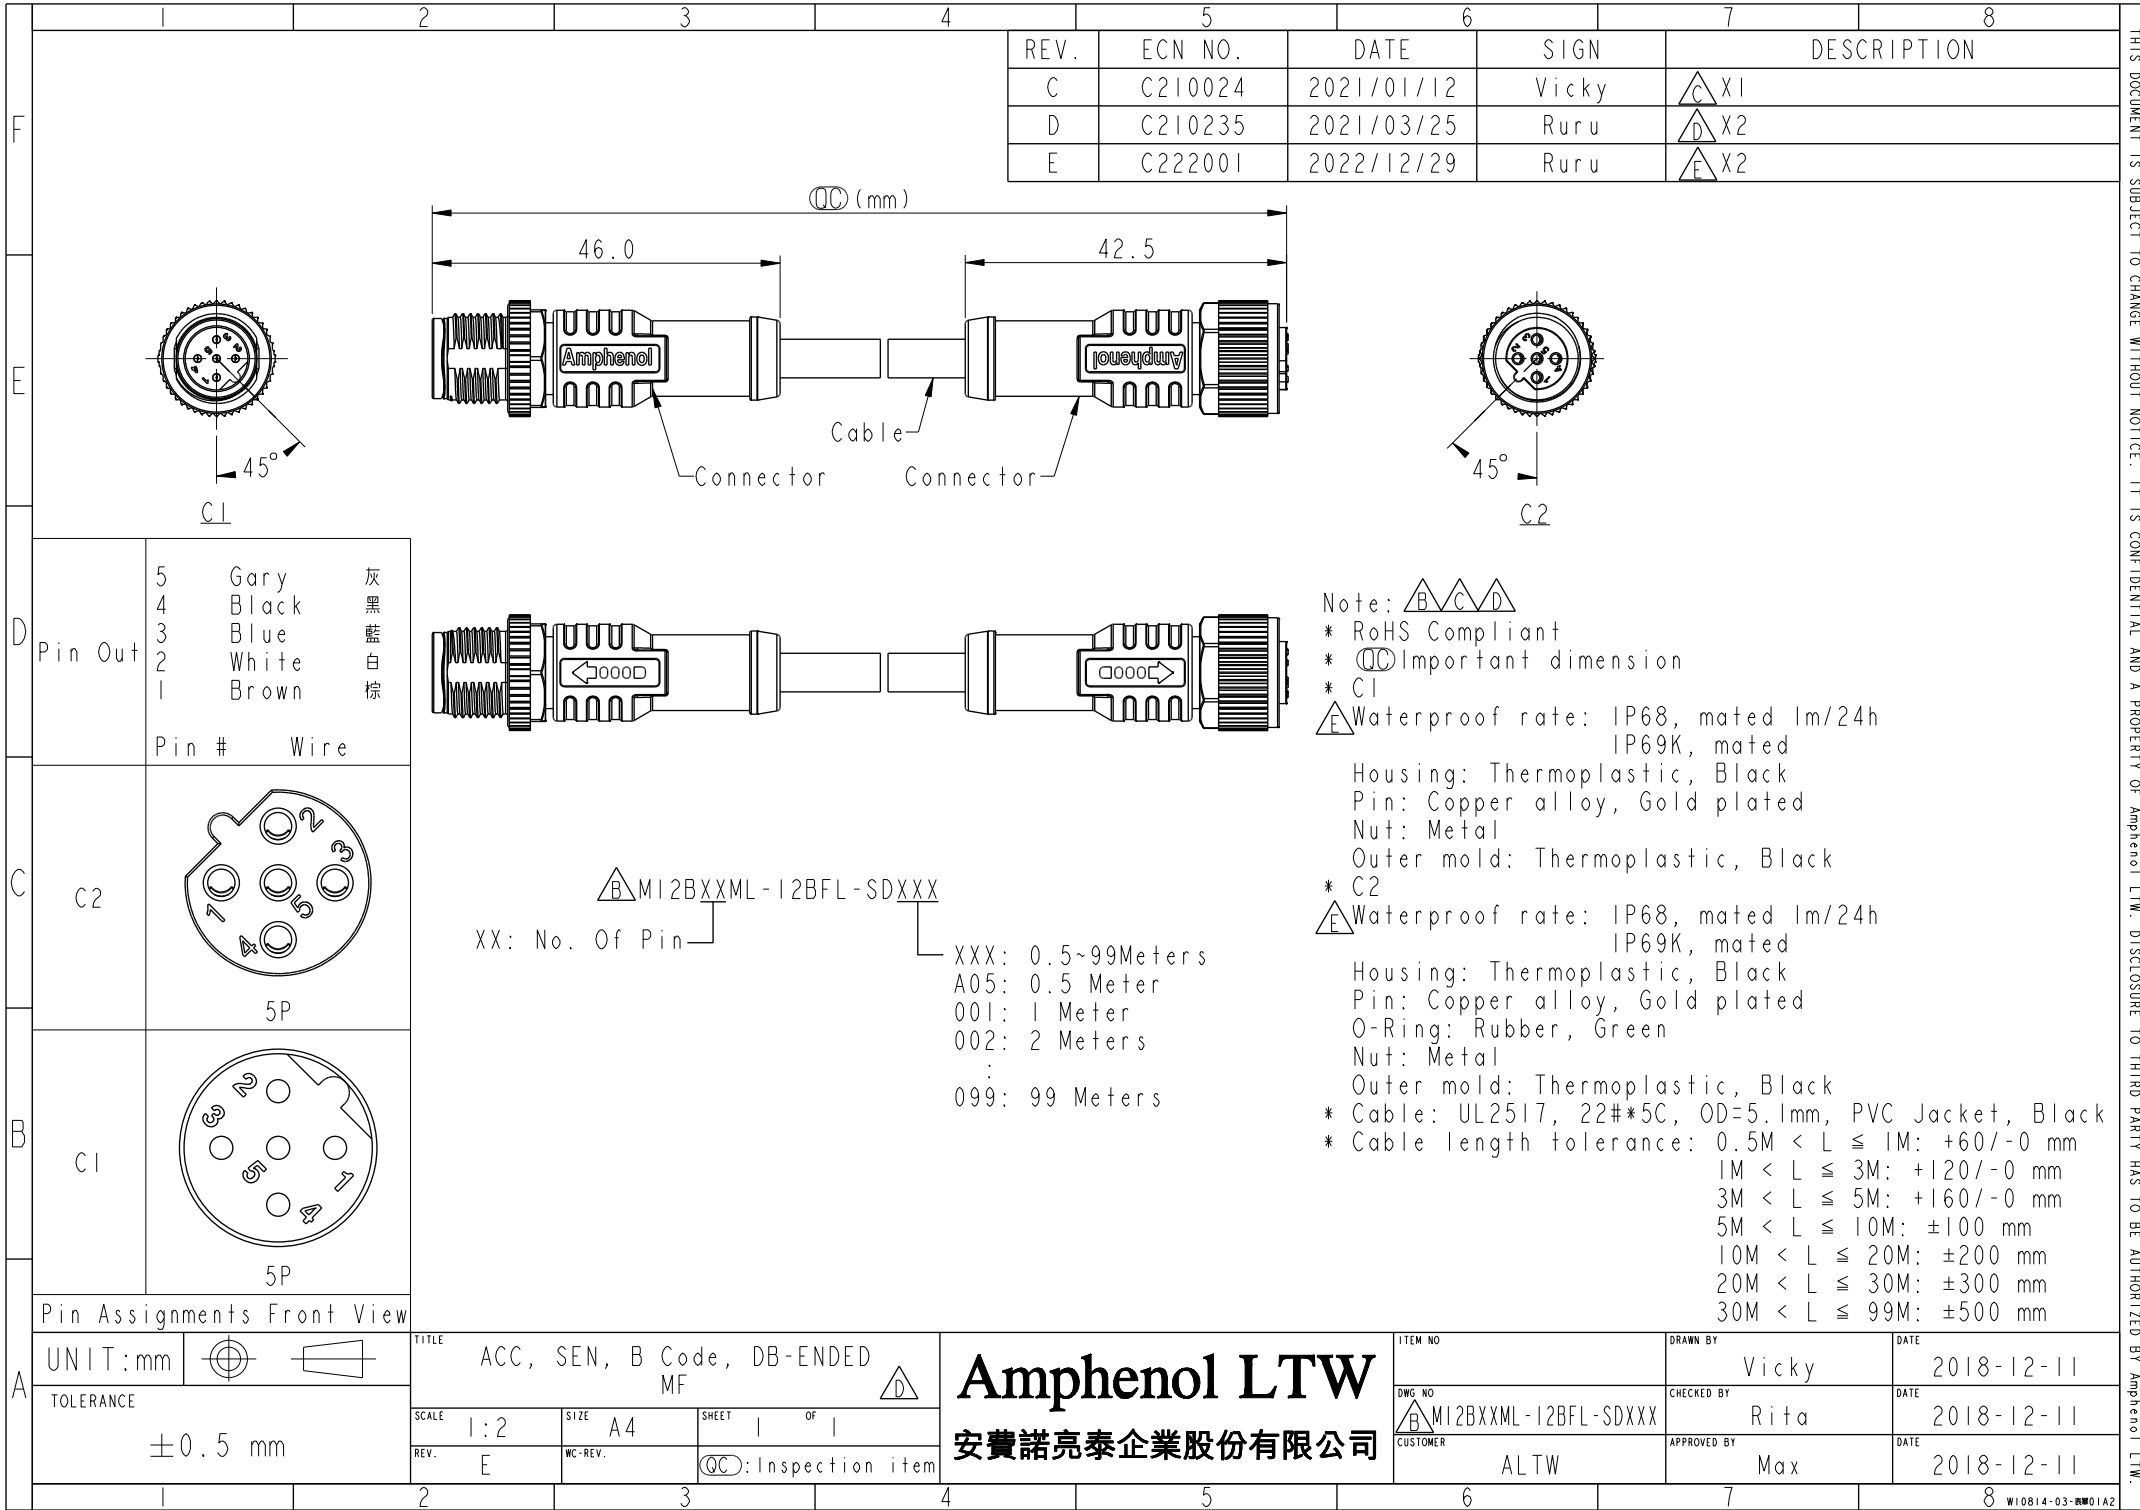


[illegible][illegible][illegible][illegible]

	REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210024	2021/01/12	Vicky	X1	
D	C210235	2021/03/25	Ruru	X2	
E	C222001	2022/12/29	Ruru	X2	

Note: △△△
 * RoHS Compliant
 * ⌀ Important dimension
 * C1 Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * C2 Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Green
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * Cable: UL2517, 22#*5C, OD=5.1mm, PVC Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

Pin Out	Wire	Color
5	Gary	灰黑
4	Black	藍白
3	Blue	棕
2	White	
1	Brown	

Pin Assignments Front View

TITLE	SCALE	SIZE	SHEET OF	REV.	WC-REV.	QC-Inspection item
ACC, SEN, B Code, DB-ENDED MF	1:2	A4	I OF I	E		

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
M12BXXML-12BFL-SDXXX		ALTW	Vicky	Rita	Max	2018-12-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.