
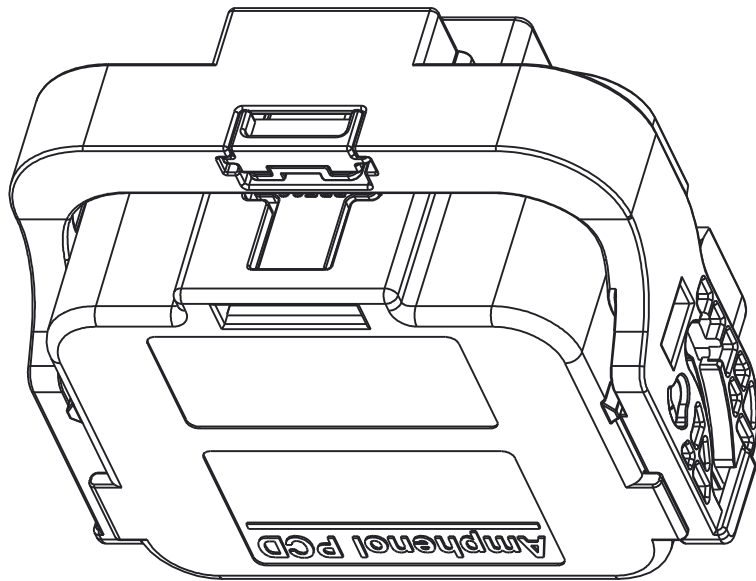




MINIMSD

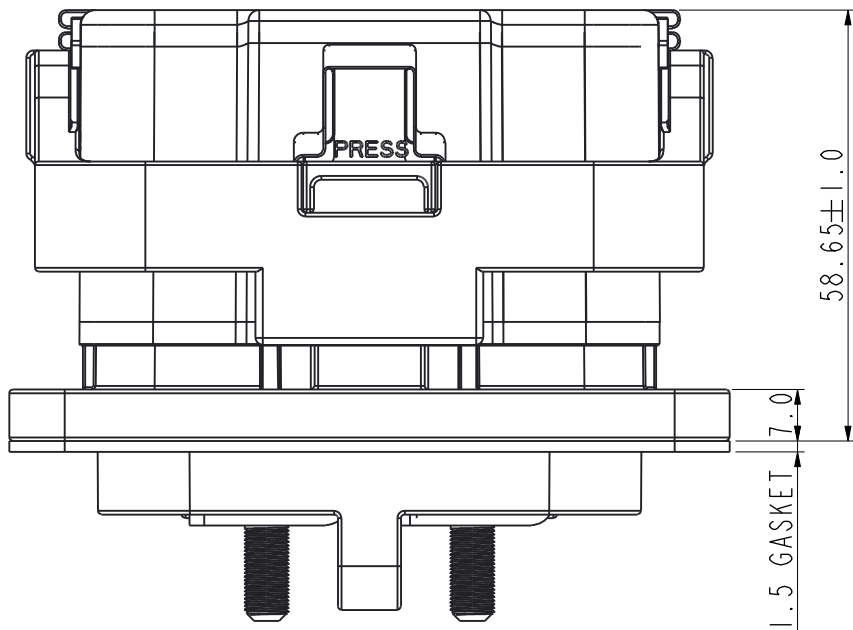

BUSSMANN PART TYPE(巴斯曼熔断器型号) :
1.MINI-MSDM000(WITHOUT FUSE) 2.MINI-MSDM080(FUSE=80A)
3.MINI-MSDMI00(FUSE=100A) 4.MINI-MSDMI25(FUSE=125A)
5.MINI-MSDMI60(FUSE=160A) 6.MINI-MSDM200(FUSE=200A)
7.MINI-MSDM250(FUSE=250A) 8.MINI-MSDM315(FUSE=315A)
9.MINI-MSDM350(FUSE=350A) 10.MINI-MSDM400(FUSE=400A)


ZHONGRONG PART TYPE(中熔熔断器型号) : B
1.MINI-MSDM0801(FUSE=80A) 2.MINI-MSDMI001(FUSE=100A)
3.MINI-MSDMI251(FUSE=125A) 4.MINI-MSDMI601(FUSE=160A)
5.MINI-MSDM2001(FUSE=200A) 6.MINI-MSDM2501(FUSE=250A)
7.MINI-MSDM3151(FUSE=315A) 8.MINI-MSDM3501(FUSE=350A)
9.MINI-MSDM4001(FUSE=400A)

MINIMSD

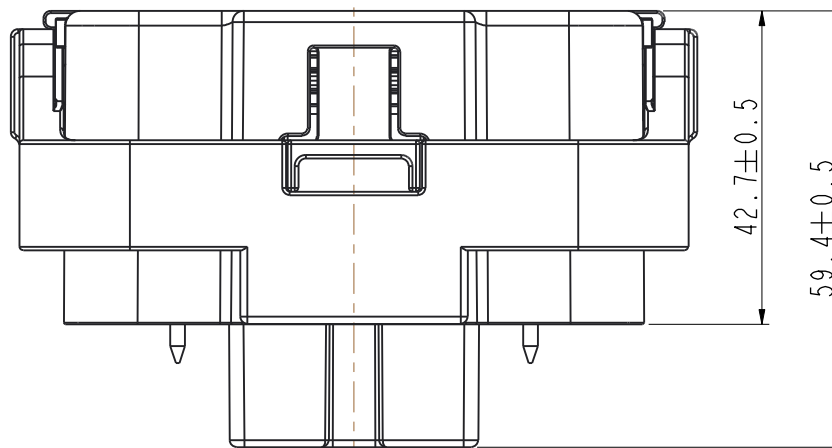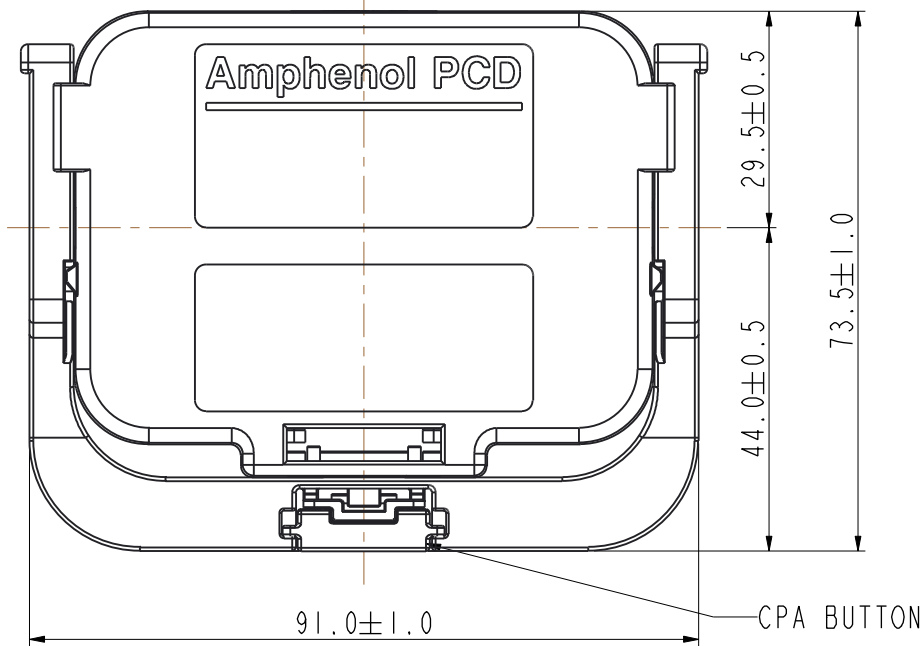


MINI-MSD PLUG

FUSE 熔断器规格	80A	100A	125A	160A	200A	250A	315A	350A	400A	SHUNT
MARKING 对应插座印字	80A	100A	125A	160A	200A	250A	315A	350A	400A	SHUNT

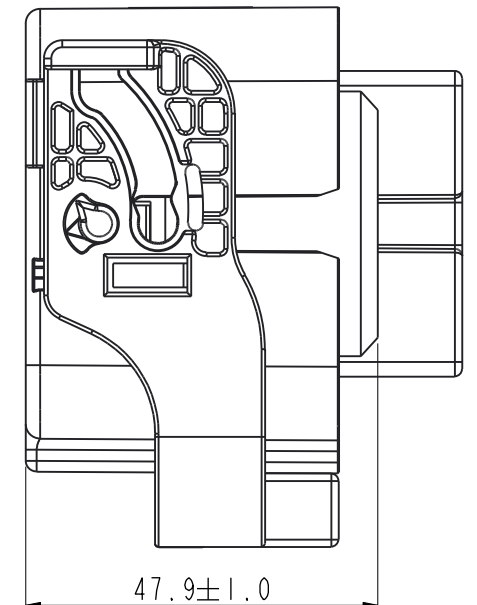


LEVER IN LOCKED POSITON
锁紧后手柄位置

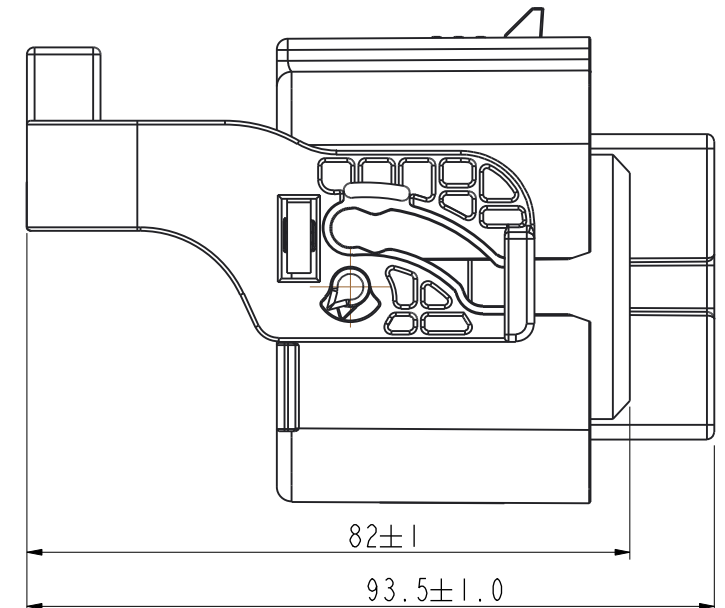

LEVER IN OPEND POSITON
打开后手柄位置

MINIMSD

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd Shenzhen		TITLE			
			JACK.D	Apr-15-15	MINI-MSD SPEC MINI-MSDM-XXXX			
ANSI Y14.5M UNITS: MM Pro/E FILE	.X ±0.5 .XX ±0.30 ANGLES ±1.0°		ENGR	CHKD	SIZE A3	DWG NO.	MINIMSD	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN		APPD		CODE: 58982	SCALE:	SHEET 1	OF 2

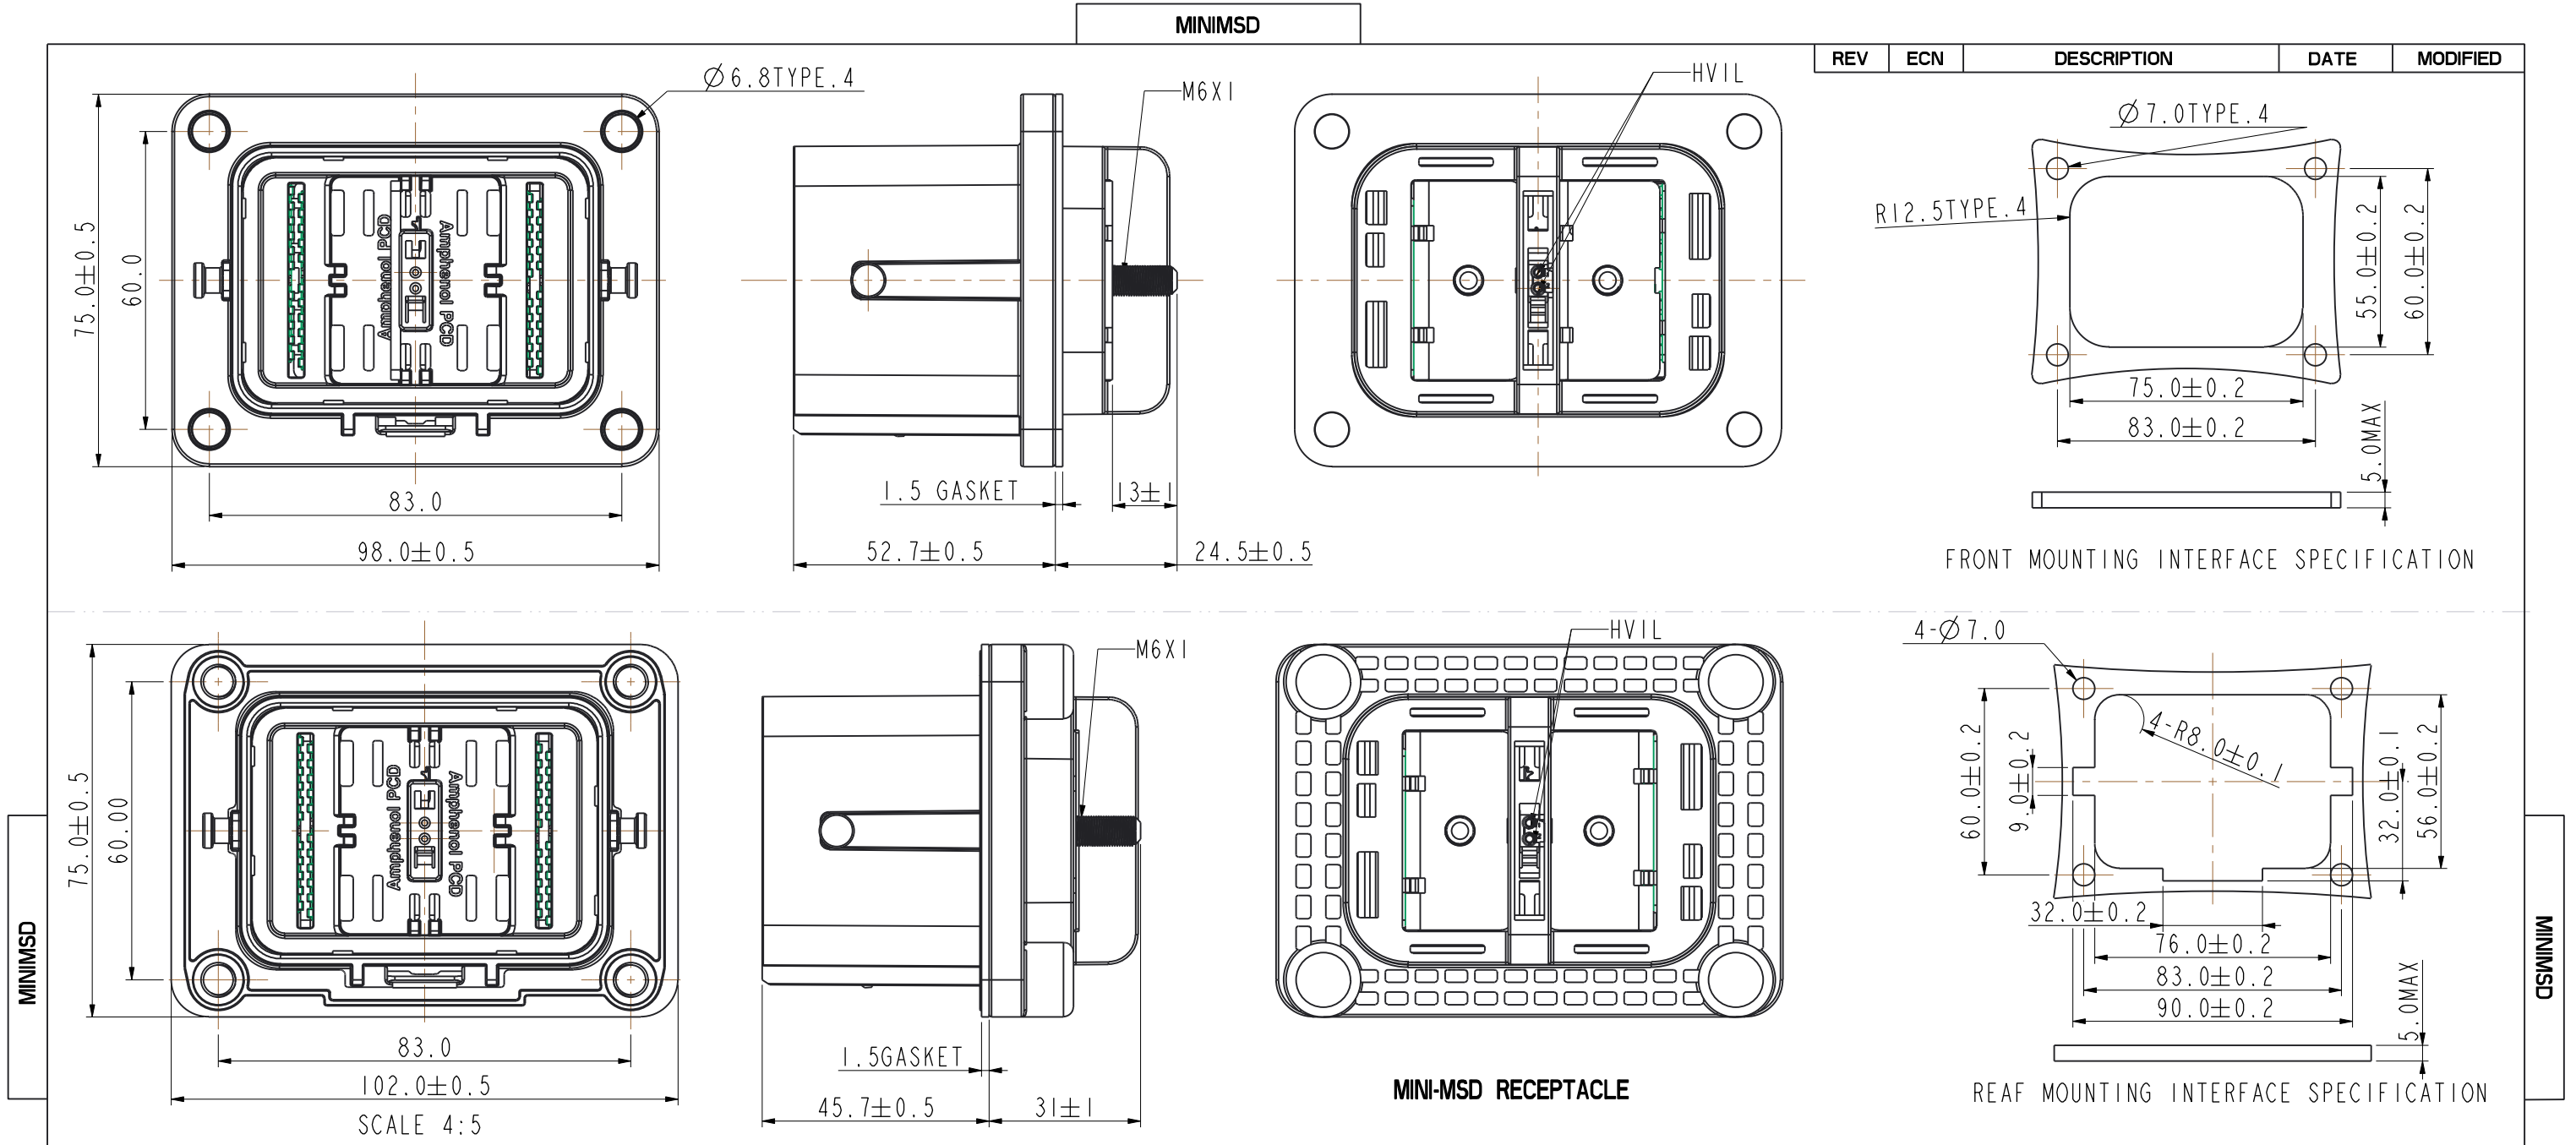

- NOTES:
1. THREADED STUD TORQUE LIMITS (M6): 5.3Nm ± 0.5Nm 接线端子锁紧力矩 (M6) 5.3Nm ± 0.5Nm
 2. HVIL CONNECTOR: MSD-HVIL-2S
HVIL信号连接器型号: MSD-HVIL-2S
 3. MOUNTING SURFACE THICKNESS: MAX 5mm 法兰安装板厚度 最大5mm
 4. INNER HOUSING MAY BE ASSEMBLED ROTATED 180° FROM AS SHOW
内部插芯有可能与图纸中的方向相差180°
 5. 额定工作电压: 1)带保险丝: 最大690V AC(巴斯曼熔断器); 最大750V DC(中熔熔断器); 2)不带保险丝 最大1500VDC
Rated Voltage: 1)MOUNTING FUSE: 690V AC(BUSSMANN FUSE); 750V DC(ZHONGRONG FUSE).
2)SHUNT, 1500V DC
 6. 额定工作电流: 1)带保险丝 由保险丝规格而变动 2)不带保险丝 最大170A
Rated Current: 1)BASED ON FUSE SELECTION
2)MAX170A(SHUNT, NO FUSE)
 7. 工作环境温度: -40°C ~ +70°C
Ambient Temperature: -40°C ~ +70°C
 8. 相对湿度40%~70% (温度为23±5°C)
Humidity: 40%~70% (AT 23±5°C)
 9. IP CODE: IP67 IP6K9K(MATED)

PART TYLE :

1. MINI-MSDF000F (FRONT MOUNTING)
2. MINI-MSDF000R (REAF MOUNTING)

DIMENSIONS		TOLERANCES		PROJECTION		TITLE							
ANSI Y14.5M		.X ±0.5				Amphenol Pcd Shenzhen							
UNITS: MM		.XX ±0.30				ENGR							
Pro/E FILE		ANGLES ±1.0°				JACK.D		Apr-16-15					
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN				CHKD		SIZE		DWG NO.		REV	
						APPD		A3		MINIMSD		B	
								CODE: 58982		SCALE:		SHEET 2 OF 2	