


MLF2012DR39JT000

Applications		Commercial Grade
Feature	  	Multilayer Magnetic Shield Ferrite Core
Series	MLF Series / MLF2012 Type	
Status	Production	

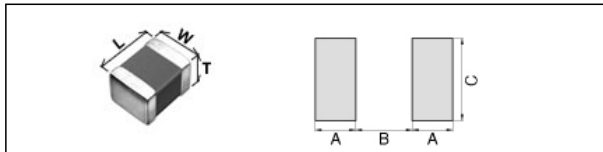


Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics	
Inductance	390nH +/-5% at 25MHz
Rated Current	200mA
Self-Resonant Frequency [Min.]	180MHz
Self-Resonant Frequency [Typ.]	250MHz
Q [Min.]	25 at 25MHz
Q [Typ.]	35 at 25MHz
DC Resistance [Nom.]	250mΩ
DC Resistance [Max.]	450mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.01g

MLF2012DR39JT000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

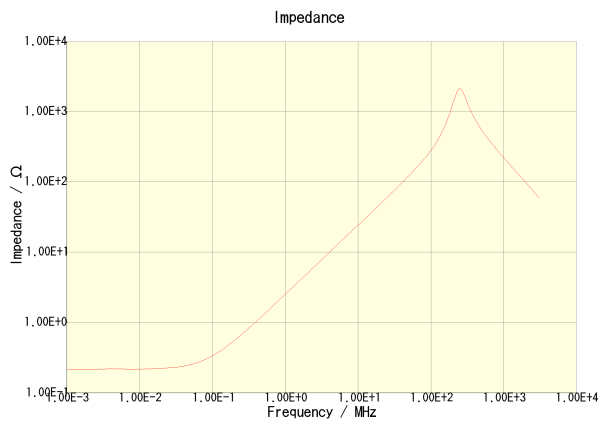


MLF2012DR39JT000

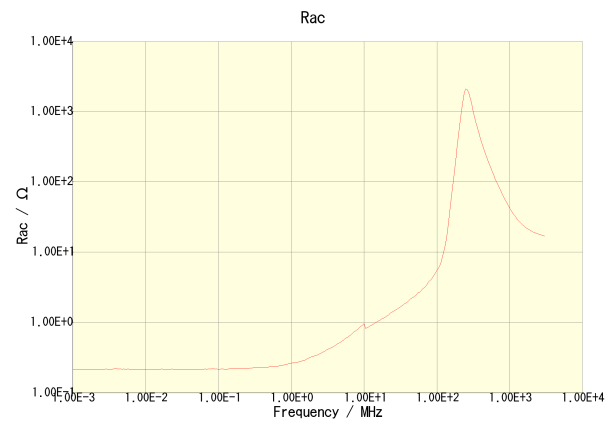

MLF2012DR39JT000

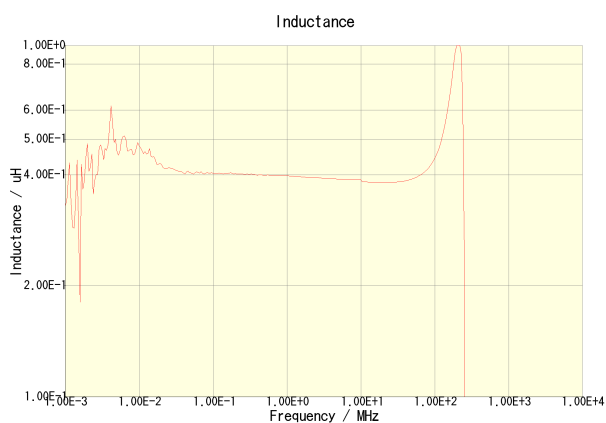

MLF2012DR39JT000

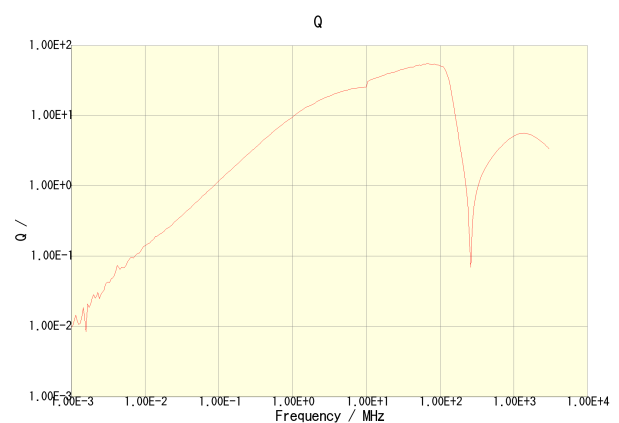

MLF2012DR39JT000

MLF2012DR39JT000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

