


MLG0603S3N9ST000

Applications	 Commercial Grade
Feature	 Multilayer
	 Non-Magnetic Core (Dielectric Ceramic)
Series	MLG Series / MLG0603S Type
Status	Production

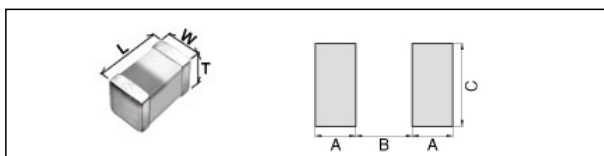


Size	
Length(L)	0.60mm +/-0.03mm
Width(W)	0.30mm +/-0.03mm
Thickness(T)	0.30mm +/-0.03mm
Recommended Land Pattern (A)	0.25mm Nom.
Recommended Land Pattern (B)	0.30mm Nom.
Recommended Land Pattern (C)	0.30mm Nom.

Electrical Characteristics	
Inductance	3.9nH +/-0.3nH at 100MHz
Rated Current (Temperature Rise) [Max.]	300mA (20degC Rise)
Self-Resonant Frequency [Min.]	5GHz
Self-Resonant Frequency [Typ.]	6.6GHz
Q [Min.]	5 at 100MHz
Q [Typ.]	
DC Resistance [Nom.]	270mΩ
DC Resistance [Max.]	400mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	15000Pcs Min.
Weight	0.0002g

MLG0603S3N9ST000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

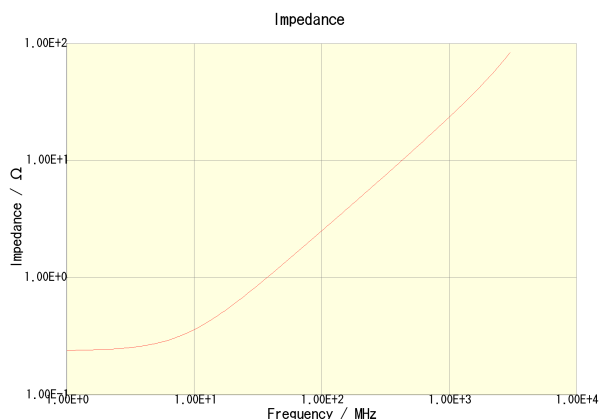


MLG0603S3N9ST000

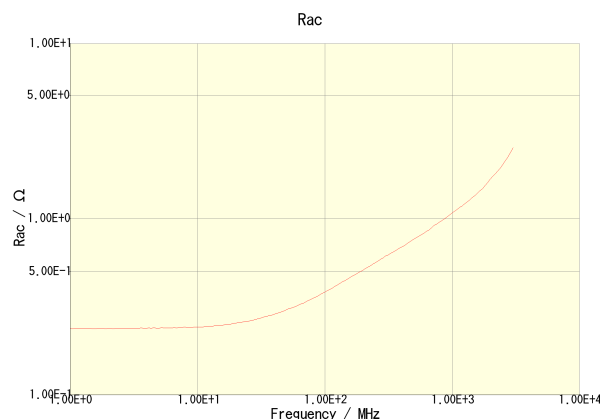

MLG0603S3N9ST000

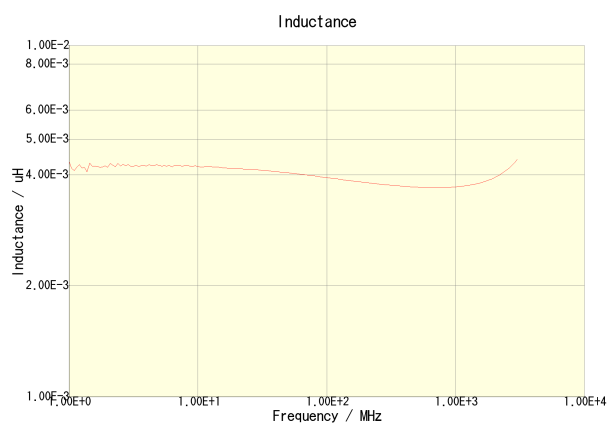



MLG0603S3N9ST000

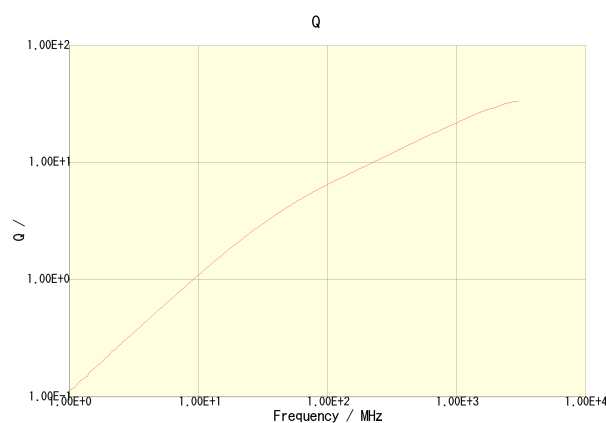


MLG0603S3N9ST000

MLG0603S3N9ST000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

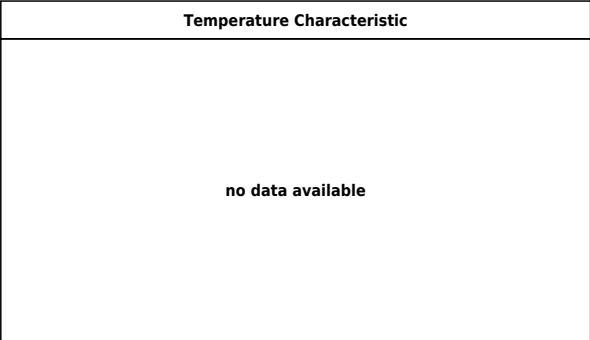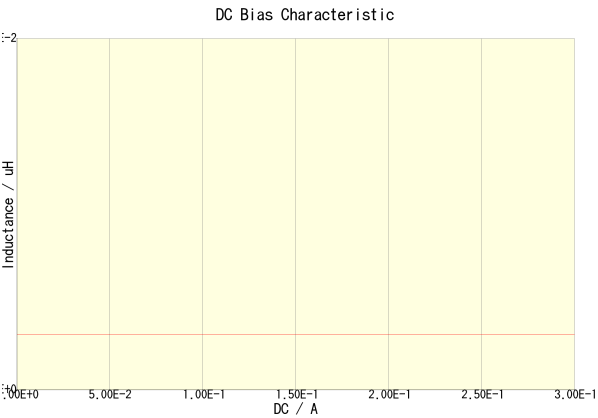

MLG0603S3N9ST000(Amb. Temp. = 20degc)

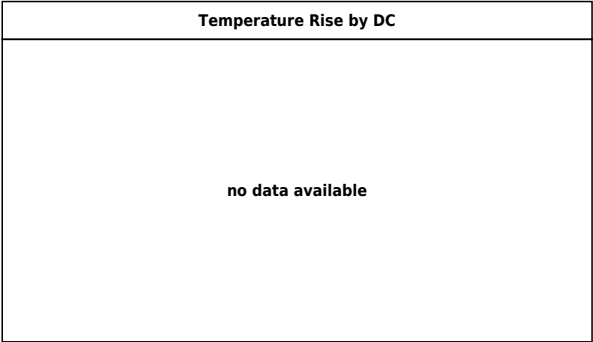

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.