


MLK1005S33NJT000

Applications		Commercial Grade
Feature		Multilayer
		No Directivity
		Non-Magnetic Core (Dielectric Ceramic)
Series	MLK Series / MLK1005 Type	
Status	Production	

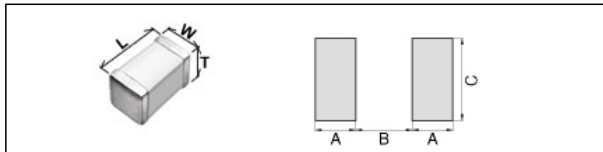


Size	
Length(L)	1.00mm +/-0.10mm
Width(W)	0.50mm +/-0.10mm
Thickness(T)	0.50mm +/-0.10mm
Recommended Land Pattern (A)	0.50mm Nom.
Recommended Land Pattern (B)	0.40mm Nom.
Recommended Land Pattern (C)	0.50mm Nom.

Electrical Characteristics	
Inductance	33nH +/-5% at 100MHz
Rated Current (Temperature Rise) [Max.]	200mA (20degC Rise)
Self-Resonant Frequency [Min.]	2.5GHz
Self-Resonant Frequency [Typ.]	3.5GHz
Q [Min.]	7 at 100MHz
Q [Typ.]	9 at 100MHz
DC Resistance [Nom.]	590mΩ
DC Resistance [Max.]	900mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000Pcs Min.
Weight	0.001g

MLK1005S33NJT000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

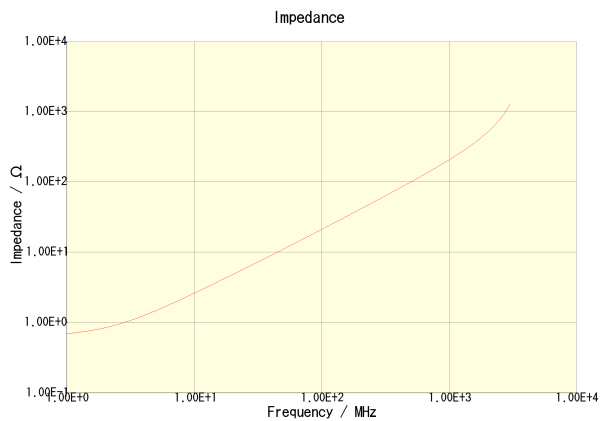


MLK1005S33NJT000

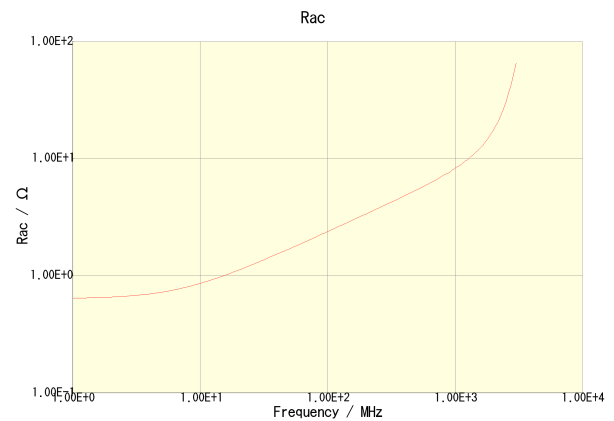

MLK1005S33NJT000

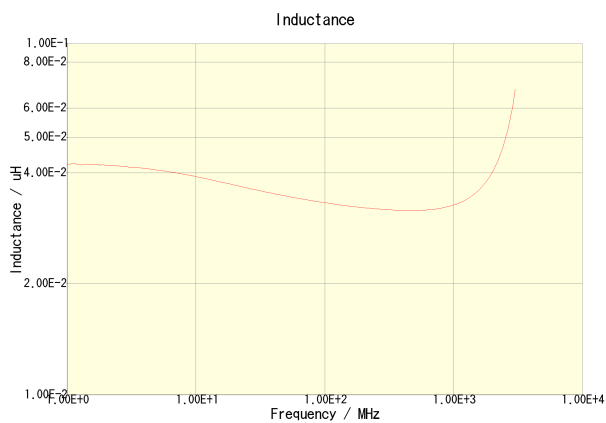


MLK1005S33NJT000

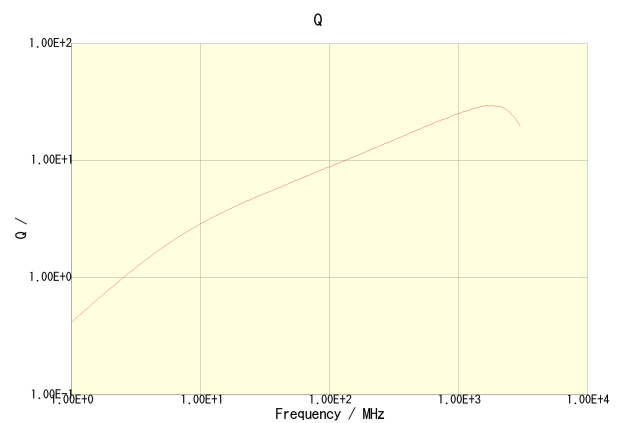

MLK1005S33NJT000

MLK1005S33NJT000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

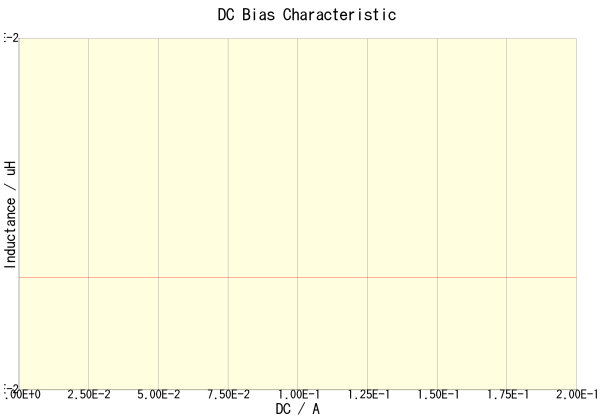

Temperature Characteristic
no data available

MLK1005S33NJT000(Amb. Temp. = 20degc)

Temperature Rise by DC
no data available

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.