



Switches > Push Button Switches



Configuration (Pole-Throw): **Double Pole - Double Throw**
Push Button Switch Product Type: **General Purpose Push Button Switch**
Number of Actuators: **Single**
Actuator Profile: **Extended**
Bushing Style: **Threaded**

Features

Product Type Features

Switch Connection Type	Wire Lugs
Push Button Switch Product Type	General Purpose Push Button Switch
Illuminated	Without
Actuator Style	Cap Actuator - Order Separately

Configuration Features

Configuration (Pole-Throw)	Double Pole - Double Throw
Number of Actuators	Single
Snap Action	Without
Support Bracket	Without
Switch Feedback Type	Non-Tactile
Operating Function	Momentary

Electrical Characteristics

Contact Current Rating	6 A
Operating Voltage Range	28 VDC



Body Features

Case Material	Thermoset
Actuator Material	Nickel-Plated Copper Alloy
Product Orientation	Vertical
Actuator Force	400 – 2000 g[14.11 – 70.54 oz]
Actuator Profile	Extended
Bushing Style	Threaded
Bushing Thread Size	1/4-40
Actuator Color	Natural

Contact Features

Contact Base Material	Silver Clad Copper
Switch Contact Plating Material	Silver Clad with Gold Flash

Housing Features

Low Profile	No
Process Sealed	No

Dimensions

Bushing Length	7.11 mm[.28 in]
Actuator Length	13.97 mm[.55 in]

Usage Conditions

Operating Temperature Range	-20 – 85 °C[-4 – 185 °F]
-----------------------------	--------------------------

Packaging Features

Packaging Method	Bulk
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold:



Pb (3.7% in Component Part)

Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.




Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Wave solder capable to 240°C
---------------------------	------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

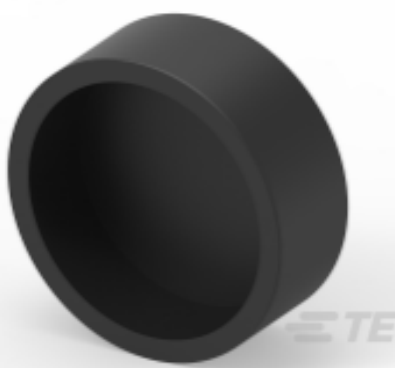 TE Part # 3-1437567-6 MPA306F=SW P/B MOM 3PDT	 TE Part # 4-1437567-3 MPE106F=SWITCH PUSH BUTTON WAT	 TE Part # 5-1437567-6 MPG306F=(MSPG) SW PUSHBUTTON	 TE Part # 5-1437567-3 MPG206R=(MSPG) SW PUSHBUTTON
 TE Part # 2-1437567-9 MPA106F=SWITCH P/B MOM SPDT	 TE Part # 2-1437567-8 MPA106D=SW P/B ON/OFF SPDT	 TE Part # 5-1437567-8 MPG406R=(MSPG) SW PUSHBUTTON	 TE Part # 5-1437567-0 MPG106F=(MSPG) SWITCH PUSHBUTT
 TE Part # 4-1437567-5 MPE206R=(MSPE) SW P/B WATERPRO	 TE Part # 4-1437567-8 MPE406R=(MSPE) SW P/B WATERPRO	 TE Part # 7-1437627-1 C90=C-9 BLACK	 TE Part # 3-1437567-8 MPA406R=SW P/B MOM 4PDT



TE Part # 4-1437567-9
MPG106D=(MSPG) SWITCH
PUSHBUTT



TE Part # 4-1437567-2
MPE106D=(MSPE) SW P/B WATERPRO



TE Part # 5-1437567-7
MPG406N=(MSPG) SW PUSHBUTTON



TE Part # 5-1437567-4
MPG206RPC=(MSPG) SW P/B DPDT P



TE Part # 5-1437567-5
MPG306D=(MSPG) SW PUSHBUTTON




TE Part # 3-1437567-1
MPA206N=SW P/B ON/OFF DPDT



TE Part # 5-1437567-1
MPG206N=SWITCH PUSHBUTTON

Also in the Series | ALCOSWITCH MPA

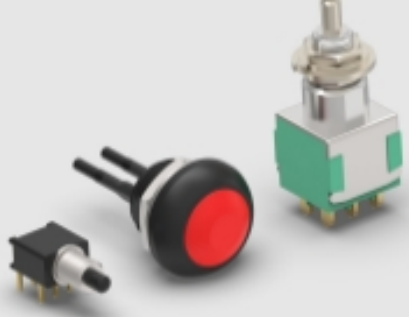


General Purpose Push Button Switches
(5)



Push Button Switches(5)


Customers Also Bought

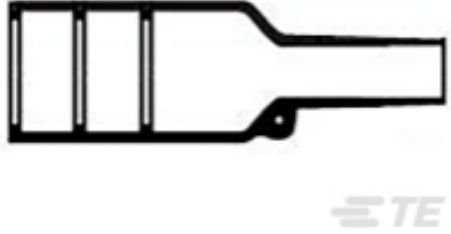

TE Part #CAT-R21-731072
Bulbous Heat Shrink Boots: Lipped,
Straight



TE Part #160457-2
FF 250 TAB 18-14AWG TPPB

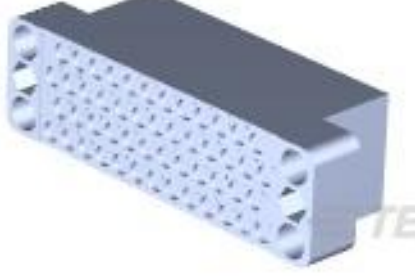

TE Part #200277-4
BLOCK,50 POSN,M SERIES




TE Part #205841-1
CPC RECPT ASSEMBLY SIZE 11-8



TE Part #206433-1
CPC RECPT ASSEMBLY SIZE 11-8




TE Part #3-350980-1
SL156 RECEPTACLE

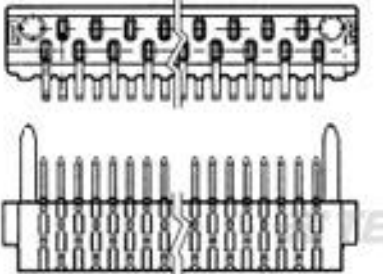

TE Part #1-582843-2
41 AMP BLADE HDR ASSY/MIL



TE Part #2101551-2
PLUG,40 POS,Sz105,w/SOLDER CUPS,
240 POT

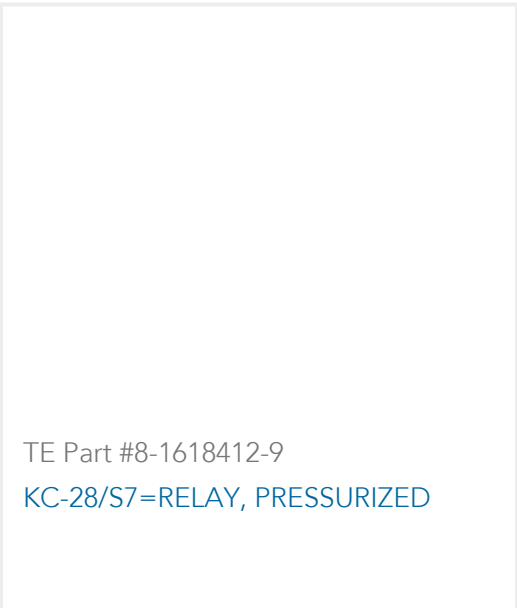

TE Part #8-1618412-9
[KC-28/S7=RELAY, PRESSURIZED](#)

Documents

Product Drawings

[MPA206R=SW P/B MOM DPDT](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-1437567-3_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1437567-3_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1437567-3_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[2-1773458-6_GREEN_SERIES_SWITCHES](#)

English