
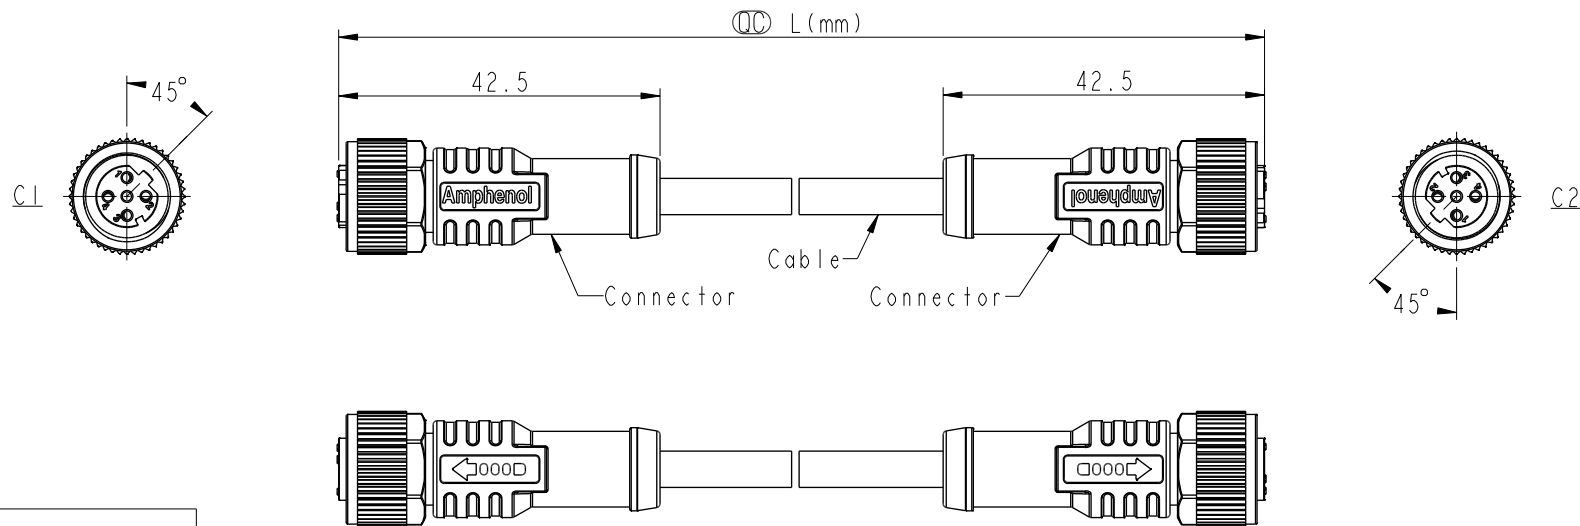


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201786	2020/11/17	Ruru	 X3
C	C210237	2021/03/25	Ruru	 X2
D	C230014	2022/12/30	Ruru	 X1



C	Pin Out	5 -- 4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕
B	C1 & C2	 4P


MSDPXXFL-SDPFL-SBXXX

XX: No. Of Pin

XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

Note:  

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, mated 1m/24h
IP69K, mated
- * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
- * Cable: UL20549, 22#4C, OD=4.0mm, PUR Jacket, Black
- * Cable length tolerance: $0.5M < L \leq 1M$: +60/-0 mm
 $1M < L \leq 3M$: +120/-0 mm
 $3M < L \leq 5M$: +160/-0 mm
 $5M < L \leq 10M$: ± 100 mm
 $10M < L \leq 20M$: ± 200 mm
 $20M < L \leq 30M$: ± 300 mm
 $30M < L \leq 99M$: ± 500 mm

A	UNIT:mm		TITLE ACC, SEN, D Code, DB-ENDED FF			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Vicky	DATE 2018-12-12
	TOLERANCE		SCALE 1:2	SIZE A4	SHEET 1 OF 1		DWG NO MSDPXXFL-SDPFL-SBXXX	CHECKED BY Rita	DATE 2018-12-12
	±0.5 mm	REV. D	MC-REV.	QC: Inspection item			CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-12