


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C210796	2021/05/24	Vicky	△E XI
F	C210910	2021/06/09	Vicky	△F XI
G	C230011	2023/01/05	Vicky	△G XI

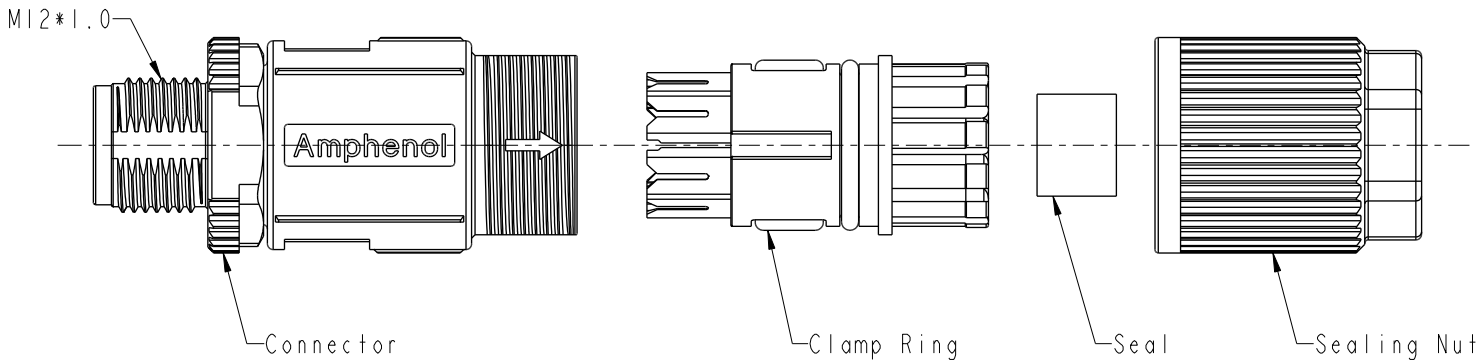

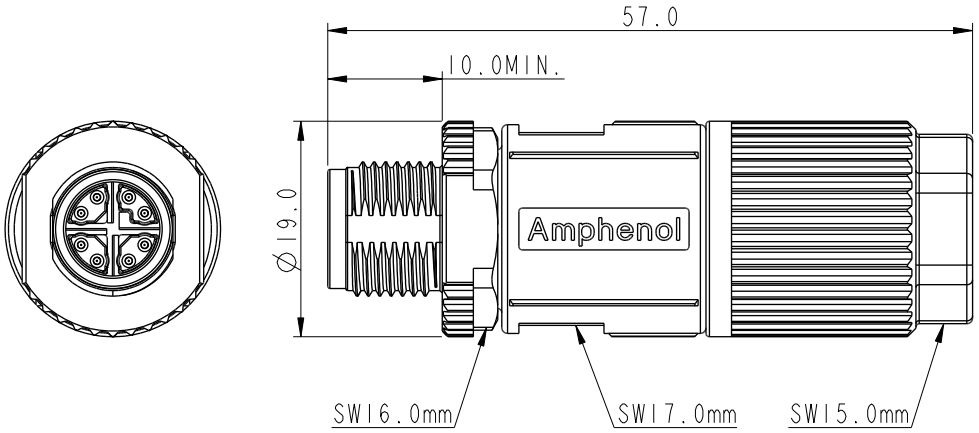

△B MSXS-XXBMMD-SL8001
XX: No. of Pin

△D Note:
* RoHS Compliant
* (QC) Important dimension
△G * Waterproof rate: IP68, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
△C Nut: Metal
△B O-Ring: Rubber, Gray
  Shield: Metal
* O-Ring: Rubber, Gray
△E * Clamp Ring: Thermoplastic, Black
* Sealing Nut: Metal
△F * Seal1: Rubber, Black, OD Ø5.0mm~6.0mm
* Seal2: Rubber, Gray, OD Ø6.0mm~7.2mm
* Seal3: Rubber, Gray, OD Ø7.2mm~9.0mm
* One set unassembled in a blister package



8P

Pin Assignment
Front View

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: N SEN, M12 X -SHLD, SCREW CABLE W/O SR, M, M, FI IDC △D

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1

REV. G | WC-REV.

(QC): Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO

DWG NO △B MSXS-XXBMMD-SL8001

CUSTOMER ALTW

DRAWN BY	Sam Ho	DATE 2019-06-03
CHECKED BY	Fred Lee	DATE 2019-06-03
APPROVED BY	Fred Lee	DATE 2019-06-03

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.