


NLFV32T-220K-EF

Applications		Commercial Grade
Feature		Wire Wound
		Magnetic Shield
		No Directivity
		Ferrite Core
Series	NLFV-EF Series / NLFV32-EF Type	
Status	Production	

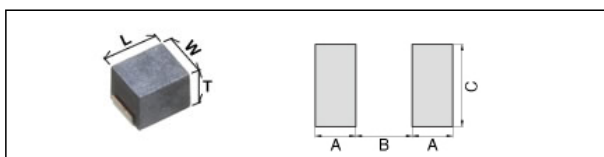


Size	
Length(L)	3.20mm +/-0.20mm
Width(W)	2.50mm +/-0.20mm
Thickness(T)	2.20mm +/-0.20mm
Recommended Land Pattern (A)	1.20mm Nom.
Recommended Land Pattern (B)	2.00mm Nom.
Recommended Land Pattern (C)	2.00mm Nom.

Electrical Characteristics	
Inductance	22uH +/-10% at 2.52MHz
Rated Current	120mA
DC Resistance [Nom.]	400mΩ
DC Resistance [Max.]	480mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Flow, Reflow, Iron Soldering
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.
Weight	0.05g

NLFV32T-220K-EF


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

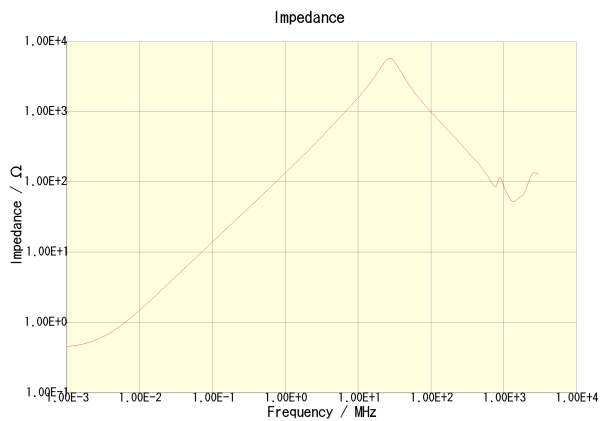


NLFV32T-220K-EF

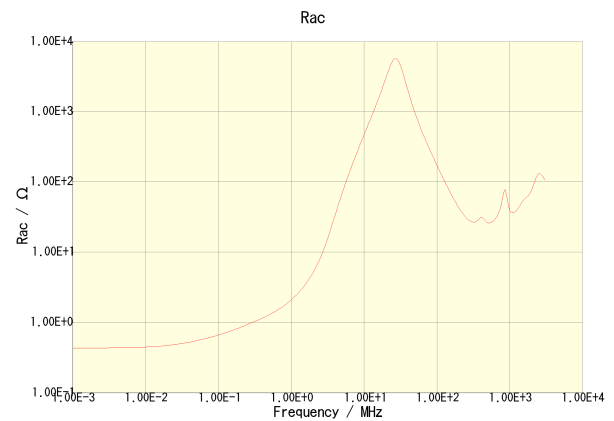

NLFV32T-220K-EF

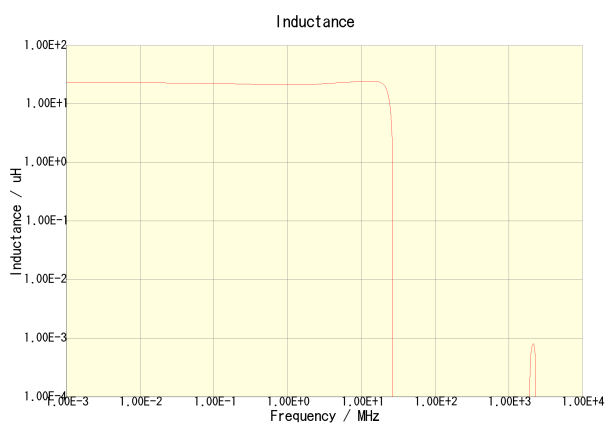


NLFV32T-220K-EF

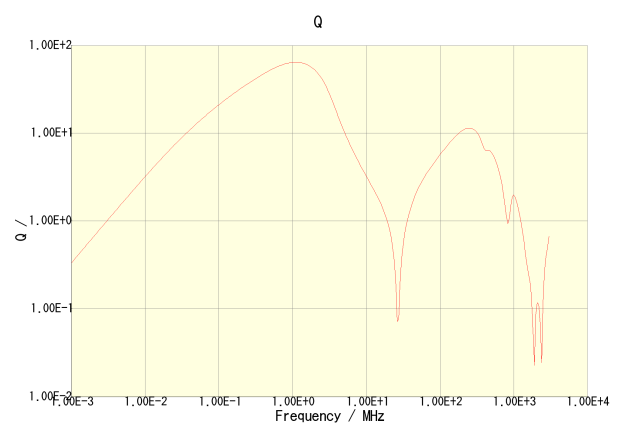


NLFV32T-220K-EF

NLFV32T-220K-EF

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

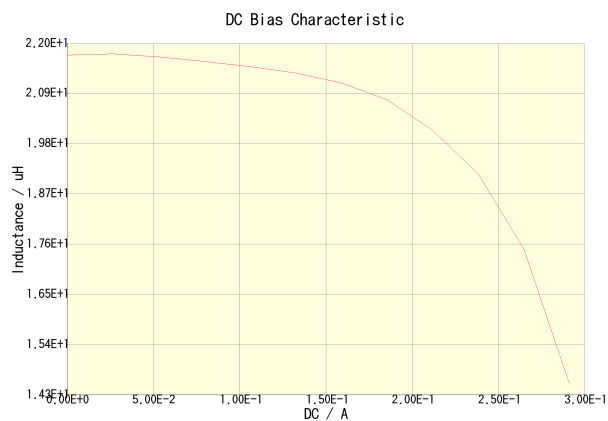


NLFV32T-220K-EF(Amb. Temp. = 20degc)

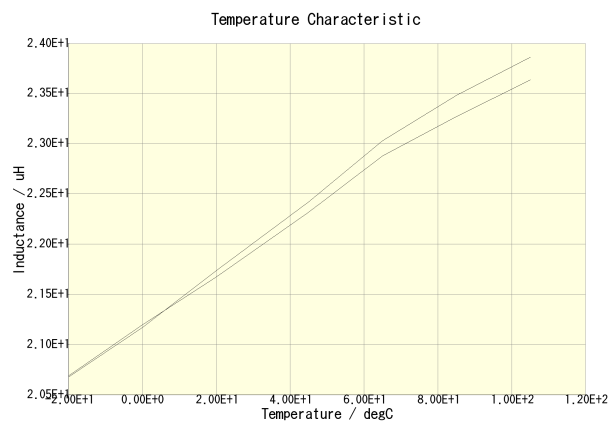

NLFV32T-220K-EF(DC = 0A)

NLFV32T-220K-EF(DC = 0.06A)

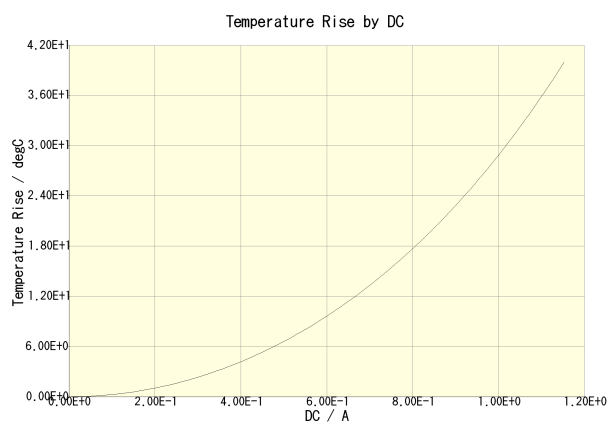

NLFV32T-220K-EF(Amb. Temp. = 20degc)