

High Voltage Non-magnetic Trimmer Capacitors

Part Number	Capacitance (pF)		Q (Min) 25 MHz.	DC Working Voltage	DC Withstanding Voltage	Dielectric	Fig.	"A" Dim. ± .016	"B" Dim. ± .016	"C" Dim. ± .03
	From Below	To Above								
NMNT1-20*	1	2	2000	10000	20000	PTFE	1	1.185	1.125	--
NMNT5-8	1	5	2000	4000	8000	PTFE	3	--	--	--
NMNT5-18	1	5	1800	8750	17500	PTFE	1	2.00	0.75	--
NMNT10-3	1	10	3500	1500	3000	PTFE	2	1.69	0.31	--
NMNT10-4	1	10	3500	2000	4000	PTFE	2	1.69	0.31	--
NMNT10-6	1	10	2000	3000	6000	PTFE	1	1.15	0.38	--
NMNT10-7	1	10	2000	3500	7000	PTFE	1	1.85	0.38	--
NMNT10-12	2	10	1800	6000	12000	PTFE	1	1.83	0.63	--
NMNT10-15	1	10	2000	7500	15000	PTFE	1	1.85	0.50	--
NMNT15	1	15	2000	2000	4000	PTFE	2	1.69	0.31	--
NMNT20-9	3	20	2300	4500	9000	PTFE	1	1.24	0.63	--
NMNT23-6	3	23	2200	3000	6000	PTFE	1	1.70	0.38	--
NMNT25-6	5	25	2000	3000	6000	PTFE	1	1.62	0.63	--
NMNT25-12	7	25	1500	6000	12000	PTFE	1	1.77	1.13	--
NMNT30	4	30	1200	3000	6000	PTFE	1	2.25	1.50	--
NMNT48-4-2RL	1.5	48		2500	3600	PTFE	4	2.25	0.31	1.66
NMNT50	5	50	700	4500	9000	PTFE	1	2.25	1.50	--
NMNT70-6	2.5	70	650	3000	6000	PTFE	1	3.00	0.70	--
NMNT70-15	6.5	70	650	7500	15000	PTFE	1	3.25	1.63	--
NMNT85	5	85	600	3000	6000	PTFE	1	3.25	1.50	--
NMNT100-4-2RL	2.0	100		2500	3600	PTFE	4	4.25	0.31	3.00

FIG. 1

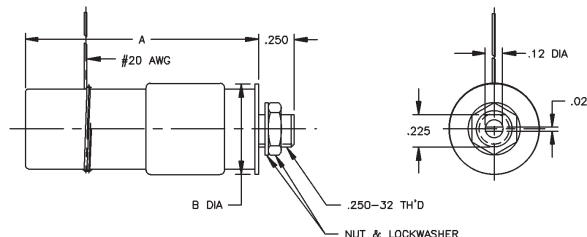


FIG. 2

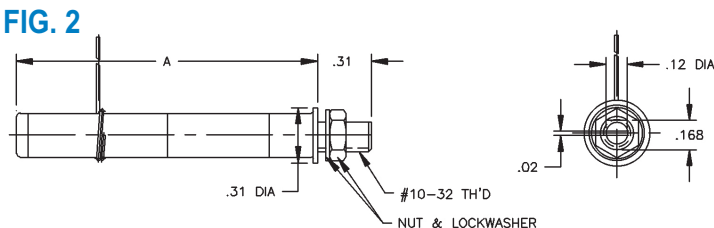


FIG. 3


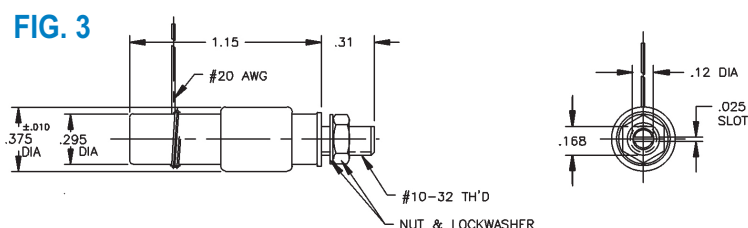


FIG. 4

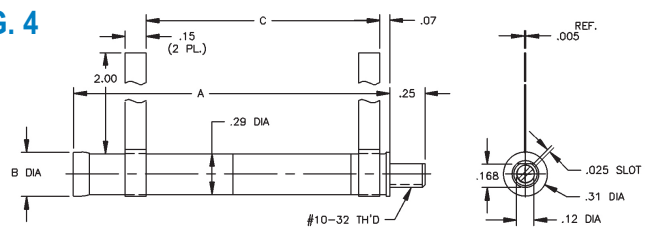


RECOMMENDED TUNING TOOLS

Consult factory for Non-Magnetic tuning tools

EXTENDED SHAFT OPTION

Add "E" to end of part number.

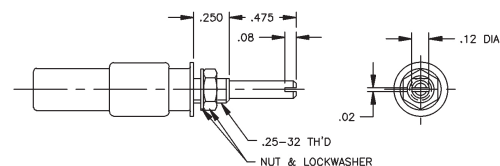

IN MM	0.010 0.25	0.016 0.41	0.020 0.51	0.036 0.91	0.067 1.70	0.070 1.78	0.090 2.29	0.120 3.05	0.130 3.30	0.150 3.81	0.160 4.06	0.167 4.24	0.220 5.59	0.025 5.72	0.235 5.97	0.250 6.35	0.281 7.14	0.295 7.49	0.310 7.87
IN MM	0.375 9.52	0.380 9.65	0.400 10.16	0.450 11.43	0.500 12.70	0.530 13.46	0.630 16.00	0.700 17.78	0.750 19.05	0.800 20.32	1.000 25.40	1.090 27.69	1.125 28.57	1.150 29.21	1.160 29.46	1.170 29.72	1.185 30.10	1.210 30.73	1.240 31.50
IN MM	1.300 33.02	1.380 35.05	1.450 36.83	1.480 37.59	1.500 38.10	1.620 41.15	1.630 41.40	1.670 42.42	1.690 42.93	1.700 43.18	1.770 44.96	1.830 46.48	1.850 46.99	2.000 50.80	2.250 57.15	2.800 71.12	3.000 76.20	3.250 82.55	