


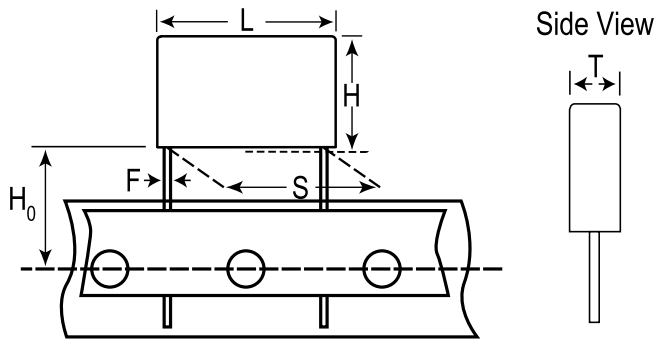

Click [here](#) for the 3D model.

General Information

Series	PMR210
Dielectric	Metallized Paper
Style	Radial
Features	RC Unit approved
RoHS	Yes
Termination	Tinned Wire
Lead	Wire Leads
Qualifications	ENEC, UL, cUL
Construction	Molded
Typical Component Weight	3.42 g
Miscellaneous	Resistor= 100 Ohms.
Notes	Not For New Design, Please Use The New P410 Series @ 300 VAC.

Specifications

Capacitance	0.033 uF
Tolerance	20%
Voltage DC	1000 VDC
Voltage AC	250 VAC
Temperature Range	-40/+85°C
Rated Temperature	85°C
Insulation Resistance	3 GOhms
Safety Class	X1

Dimensions

L	18.5mm MAX
H	14.3mm MAX
T	8.5mm MAX
S	15.2mm +0.6/-0.1mm
H0	18.5mm +/-0.5mm
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging	T&R
Packaging Quantity	350