SMT POWER INDUCTORS
Flat Coils - PG0083 Series

Pulse® A TECHNITROL COMPANY

RoHS COMPLIANT




- **Height:** 4.2mm Max
- **Footprint:** 6.8mm x 6.8mm Max
- **Current Rating:** up to 17.5A
- **Inductance Range:** 0.32µH to 3.76µH


Electrical Specifications @ 25°C — Operating Temperature -40°C to +95°C [1]

Part[8] Number	Inductance @Irated[2] (µH TYP)	Irated[3] (A)	DCR (mΩ)		Inductance @0ADC (µH ±25%)	Saturation[4] Current ISAT (A)	Heating[5] Current IDC (A)	Core Loss[6] Factor	
			TYP	MAX				(K1)	(K2)
PG0083.401	0.32	17.5	3.0	3.2	0.40	27	17.5	2.25E-10	85.4
PG0083.601	0.48	15	4.5	4.8	0.60	21	15	2.25E-10	99.7
PG0083.102	0.80	12	6.6	7.2	1.0	17	12	2.25E-10	135.9
PG0083.182	1.44	8.0	15.6	16.0	1.8	13	8.0	2.25E-10	179.4
PG0083.232	1.84	7.0	17.5	18.0	2.3	11.5	7.5	2.25E-10	202.2
PG0083.332	2.64	5.5	26.6	27.5	3.3	9.5	5.8	2.25E-10	234.9
PG0083.472	3.76	4.5	36.6	38.0	4.7	8.0	4.5	2.25E-10	281.1


NOTE: To order RoHS compliant part, add the suffix "**NL**" to the part number (i.e. PG0083.401 becomes PG0083.401**NL** and PG0083.401T becomes PG0083.401**NL**T).

Mechanical

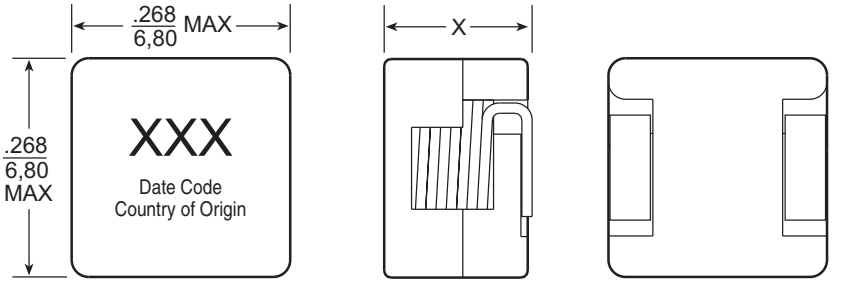

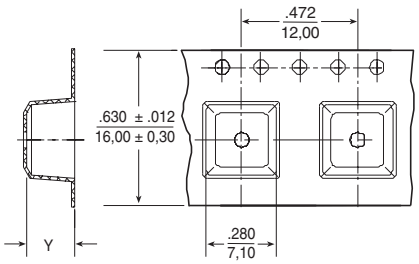

TAPE & REEL LAYOUT

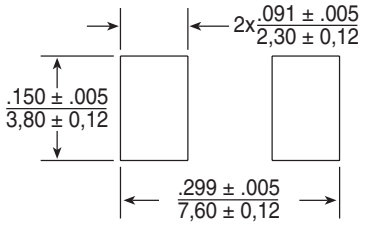


SUGGESTED PAD LAYOUT

Dimensions: Inches / mm

Unless otherwise specified, all tolerances are ± .010 / 0,25

Schematic



Part No.	Max. Height "X" (in./mm)
PG0083.401	.165/4,20
PG0083.601	.165/4,20
PG0083.102	.165/4,20
PG0083.182	.157/4,00
PG0083.232	.157/4,00
PG0083.332	.157/4,00
PG0083.472	.157/4,00

Weight.....1.0 grams
Tape & Reel 1000/reel
T&R Height 0.189/4,80
("Y" - in./mm)

Notes from Tables

1. The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
2. Inductance at Irated is a typical inductance value for the component taken at rated current.
3. The rated current listed is the lower of the saturation current @ 25°C or the heating current.
4. The saturation current, Isat, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
5. The heating current, I_{DC}, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
6. Core loss approximation is based on published core data:

   Core Loss = $K1 * (f)^{1.035} * (K2\Delta I)^{2.263}$

   Where: Core Loss = in Watts

   f = switching frequency in kHz

   K1 & K2 = core loss factors

   ΔI = delta I across the component in Ampere

   K2ΔI = one half of the peak to peak flux density across the component in Gauss
7. Unless otherwise specified, all testing is made at 100kHz, $0.1V_{AC}$.
8. Optional Tape & Reel packaging can be ordered by adding a "**T**" suffix to the part number (i.e. PG0083.472 becomes PG0083.472**T**). Pulse complies to industry standard tape and reel specification EIA481.

Inductance vs Current Characteristics

