


PX0575/20/63 Datasheet

Product Name // IEC Connector Snap Fit To Panel Inlet
PX0575 Series 2mm Panel Black 6.3mm Tab Termination
EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)

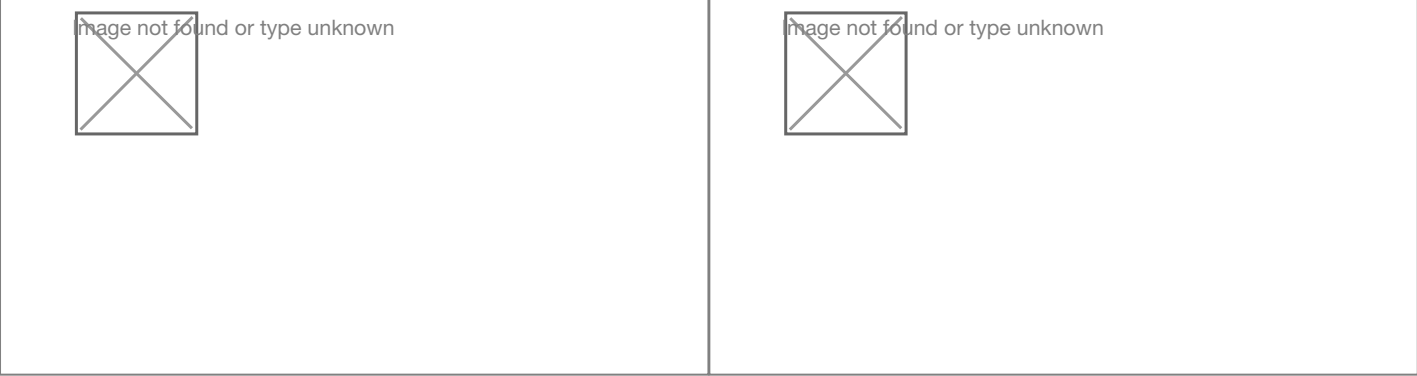

// **Product Description:**



Snap Fit Panel Mount IEC Inlets



EN60 320-1 Standard Sheet C14 Class I



Cold Condition



Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm



Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /TERM - Screw Terminal, /PC - PCB Spills



Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour only - see data for details)



PCB Mount version (part codes containing /PC) available with rear cover (part codes suffixed /C), for all other versions Insulation Boot for rear of connector available separately (part code 11328)



Mate with PX0587, PX0587/SE, PX0588

// **General Information:**

Product Display Title:

Snap Fit Panel Mount IEC Inlets

Product Family:

IEC Connectors

Product Series:

IEC60320 Main Inlets and Outlets

Approvals:

ENEC, cULus, VDE

Body Material:

Nylon 66

Current Max:

10A, 15A

Flamability Rating:

UL94V-0

Function:

Panel Mount Connector

iec Connector Colour:

Black

iec Connector Mates With:

PX0587,PX0587/SE,PX0588

iec En60620 Type:

EN60 320-1 Standard Sheet C14 Class I

Max Operating Temperature:

+70°C

Min Operating Temperature:

-40°C

Max Panel Thickness:

2mm

Min Panel Thickness:

2mm

Number Of Contacts:

3 Contacts

Rohs Compliant:

Yes

Voltage Max:

250V

// **Product PDF Links**

 [IEC Connectors product data](#)

// **Product 3D CAD Model Links**

 [PX0575/20/633D CAD Model](#)

// **Product Certificate Links**

 [UL E70394 Certificate](#)