

P 0921/10/S D

P

C

N

S

// I

13

C

-15

C

C

(

G

)


P 0921 S

10



P

P

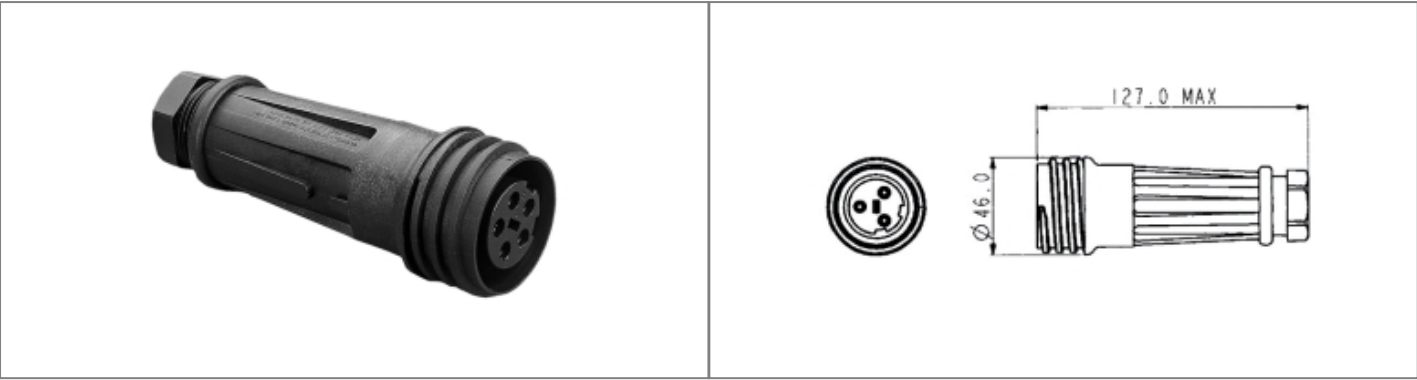

// P D :	
Inline Cable Connectors Water and dustproof to IP68 when mated with compatible connector Positive fast-acting locking ring - can be turned with a gloved hand Plug or Socket 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version Screw Terminals	Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details): PX09 part codes 7mm-15mm diameter PXA9 part codes (large cable version with strain relief clamp) 14mm-22mm diameter Packs of Cable Glands for differing cable diameters available separately (PX0980, PXA980) PX0970/PX0991 Sealing Caps available separately to maintain IP rating of unmated connectors Mate with PX0911 or PXA911 Series Flex Connectors, as appropriate

// G I :	
Product Display Title: Product Family: Product Series: Approvals: Body Material: Body Material Type: Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:	Inline Cable Connectors Circular Power Connectors 900 Series Buccaneer UL Polyamide (PA) Plastic Body Socket Contact Screw 10A 58mm UL94V-0 Inline Cable Connector IP68 15mm 13mm 18AWG 14AWG 2.5mm2 0.75mm2 +85°C -40°C 10 Contacts 250V

// P PDF L

 900 S ...

 900 S ...

// P 3D CAD M L

 P 0921/10/S3D CAD M