


REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	MAR15/21	KELVIN.T

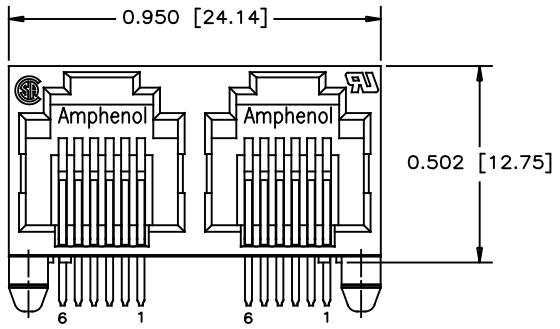

FRONT VIEW

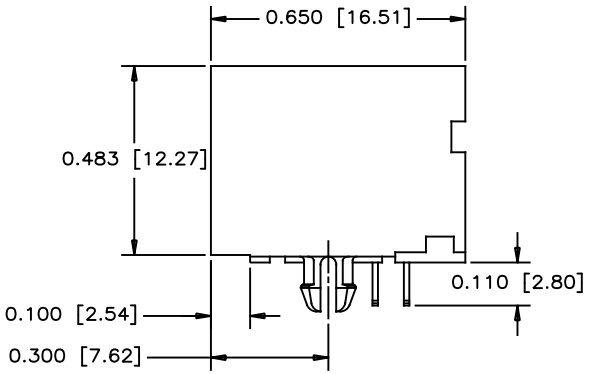


SIDE VIEW

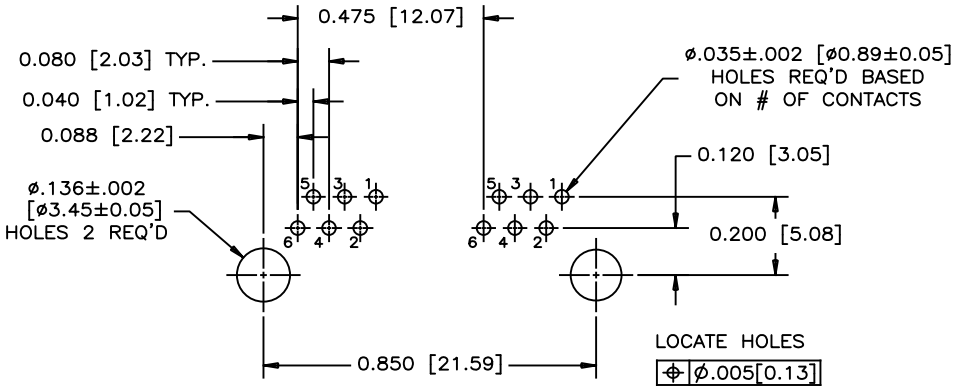

RECOMMENDED P.C.B. LAYOUT

LOCATE HOLES
⌖ ø.005[0.13]
POSITION DIMENSIONS
ARE BASIC

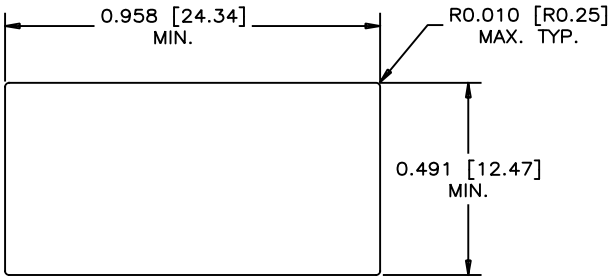

RECOMMENDED PANEL CUTOUT

MATERIALS:

PLASTIC HOUSING:	HIGH TEMPERATURE RESISTANT NYLON UL FLAMMABILITY RATING 94V–0. COLOR: BLACK
CONTACTS:	PHOSPHOR BRONZE
CONTACT PLATING:	GOLD PLATED REFER TO PART NUMBER ON MATING SURFACES 50 MICROINCHES [1.27 MICRONS] MIN NICKEL OVERALL 100 MICROINCHES [2.54 MICRONS] MATTE–TIN ON CONTACT TAILS.

PART NUMBER: RJE01–XX0–02

GOLD PLATING
1 = 6 μ"
6 = 50 μ"
G = 15 μ"
J = 30 μ"

CONTACTS:
2 = 2 CONTACTS LOADED IN POSITION 3 & 4.
4 = 4 CONTACTS LOADED IN POSITION 2 TO 5.
6 = 6 CONTACTS LOADED IN POSITION 1 TO 6.

UNLESS SPECIFIED OTHERWISE	DRAWN STEVE.X	MAR15/21	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED L.CHAN	MAR15/21	
SECONDARY MILLIMETERS	M.E. APP'D		MODULAR JACK, 2 PORT,6 POSITION, CONTACTS OPITION, WITHOUT SHIELD –RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		DWG NO. P–RJE01–XX0–02 REV A
2 DECIMAL PLACES ±0.02	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE C | SCALE NA | SHEET 1 OF 1
ANGULAR DEGREES ±1°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.