


| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION, ECN, EAR NO. | DATE | APP'D |
| A | PROPOSAL | DEC 20/18 | L.CHAN |
| B | PROPOSAL | DEC 24/18 | L.CHAN |

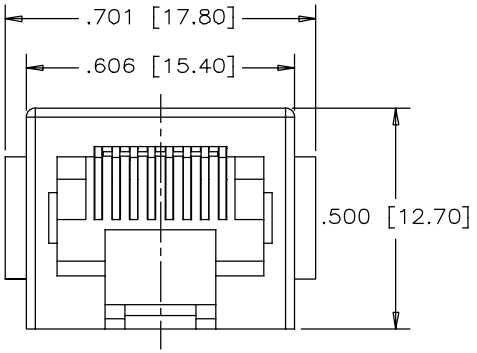


FRONT VIEW

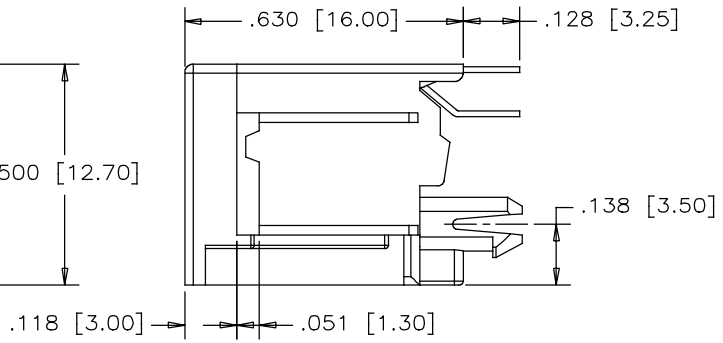



SIDE VIEW

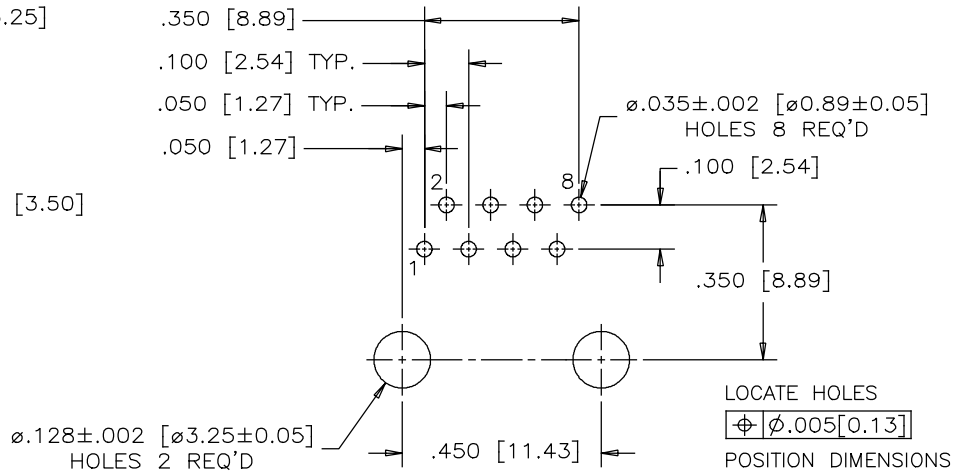


RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05 (TOP VIEW)

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

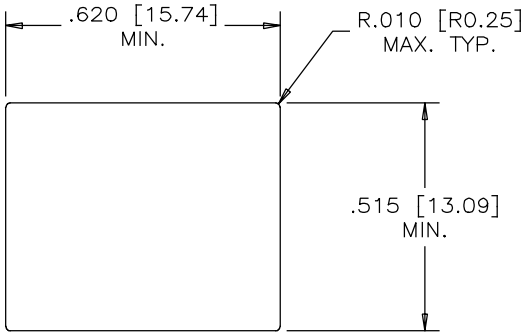


RECOMMENDED PANEL CUTOUT

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V–0, COLOR: BLACK.

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
50 µ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100 µ" [2.54 MICRONS]
MIN. MATTE–TIN OR GOLD FLASH ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 240°C MAXIMUM FOR 5 SEC MAXIMUM

PART NUMBER: RJE06–188–0X20

GOLD PLATING:
0 = GOLD FLASH
1 = 6 µ"
2 = 15 µ"
3 = 30 µ"
4 = 50 µ"

| | | | |
|---|---|---|---|
| UNLESS SPECIFIED OTHERWISE | DRAWN HANSON.C | DATE DEC 20/18 | Amphenol Canada Corp. Commercial Products |
| PRIMARY UNITS MILLIMETER | CHECKED L.CHAN | DEC 20/18 | |
| SECONDARY INCH | M.E. APP'D | | TITLE: RJE06 SERIES, 8 POSITION 8 CONTACT, VERTICAL MOUNT, UNSHIELD WITH FLANGE – RoHS COMPLIANT |
| REFERENCE IN PARENTHESES | Q.A. APP'D | | |
| GENERAL TOLERANCES | DWG APPR. | | |
| 1 DECIMAL PLACE ±0.38 | ENG. REL. NO. | | |
| 2 DECIMAL PLACES ±0.25 | REF. | | DWG. NO. P–RJE06–188–0X20 REV B |
| 3 DECIMAL PLACES ±0.20 | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING | CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1 |
| ANGULAR DEGREES ±1.0° | | | |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.