


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR 03/18	L.CHAN
B	UPDATE DRAWING	JUN 20/18	L.CHAN
C	UPDATE DRAWING	JUN 26/18	L.CHAN
D	ADD NOTE	JUL 13/18	L.CHAN
E	MODIFY THE NOTE	JUL 13/18	L.CHAN
F	MODIFY THE NOTE	JUL 16/18	L.CHAN




TOP VIEW

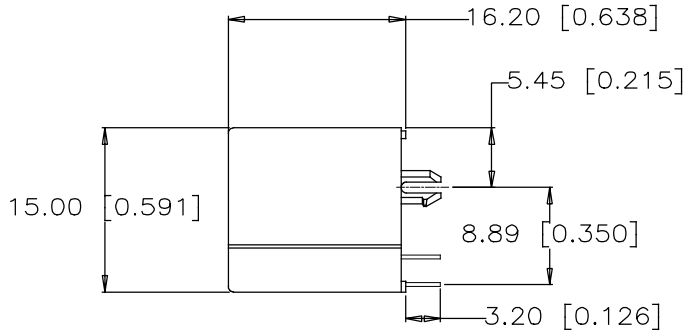

SIDE VIEW

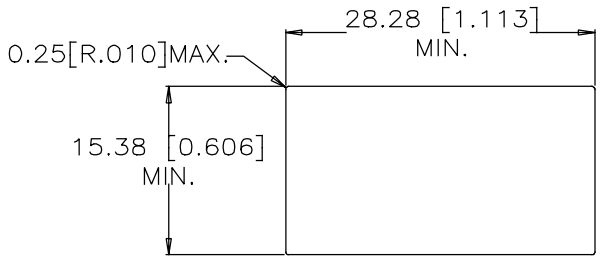

RECOMMENDED PANEL CUTOUT



BOTTOM VIEW

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST


MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC.
FLAMMABILITY RATING UL 94V–0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
50 µ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100m" TIN PLATING ON CONTACT TAILS OR
GOLD FLASH ON CONTACT TAILS.

CAN WITHSTAND MINIMUM 200 MATING CYCLES.

AMPHENOL PARTNUMBER: RJE08–288–0X19

GOLD PLATING
1 = 6 µ INCH
2 = 15 µ INCH
3 = 30 µ INCH
4 = 50 µ INCH

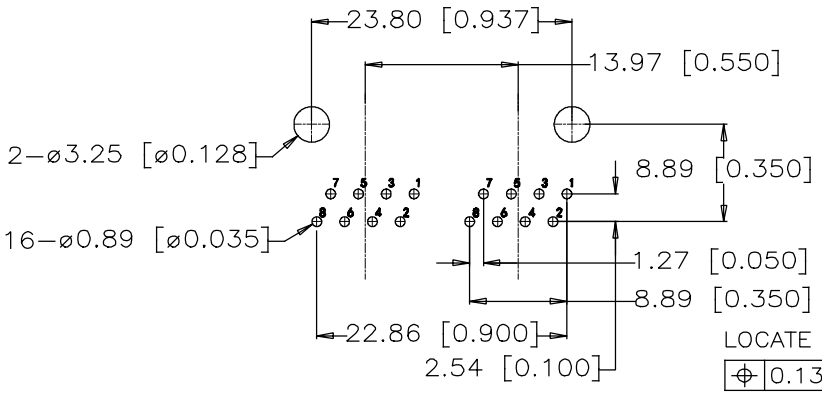

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05[.002]

LOCATE HOLES
⌖ 0.13[.005]
POSITION DIMENSIONS
ARE BASIC

UNLESS SPECIFIED OTHERWISE	DRAWN HANSON.C	DATE APR 03/18	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	APR 03/18	
SECONDARY INCH	M.E. APP'D		TITLE: RJE08 MODULAR JACK, 2 PORT, 8 POSITION, 8 CONTACTS, NO SHIELD, WITHOUT LED –RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.30	ENG. REL. NO.		DWG. NO. P–RJE08–288–0X19 REV F
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.