


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	NOV 18/13	L.CHAN
B	CORRECT DRAWING	MAY04/14	L.CHAN

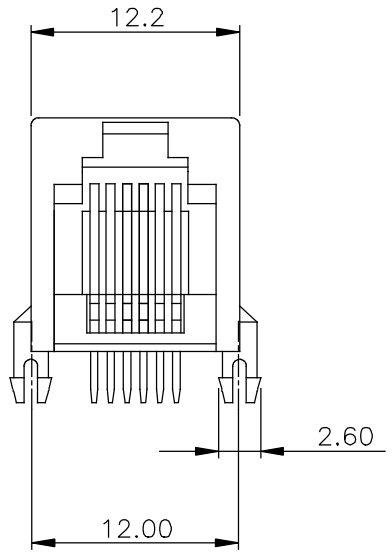

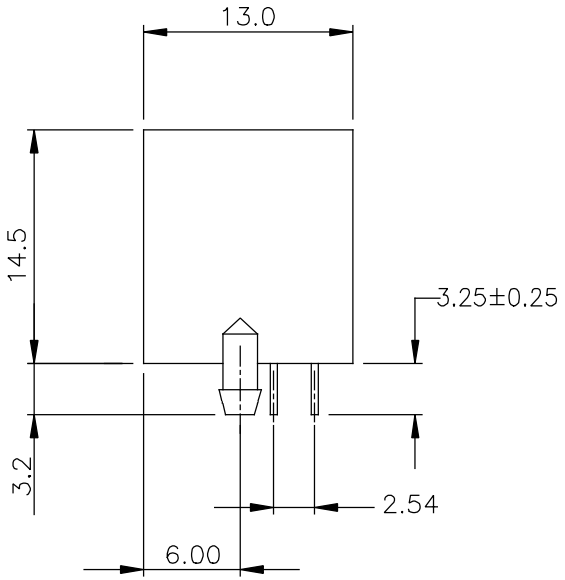

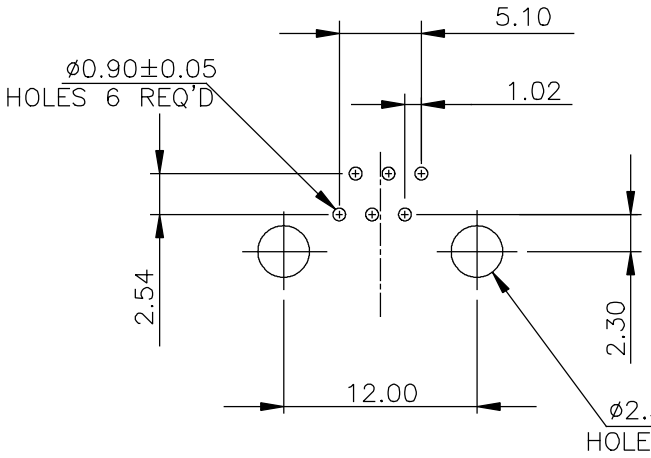

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
⌖ .13
HOLE DIMENSIONS ARE BASIC

NOTES:
MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY UL94V-0
COLOUR: BLACK
CONTACTS: COPPER ALLOY,
REFER TO P/N FOR GOLD THICKNESS PLATING ON MATING AREA.
50u'' [1.25 MICRONS] MIN. NICKEL UNDERPLATE.
100u'' [3.75 MICRONS] MIN. MATTE TIN PLATING OR GOLD FLASH ON SOLDER TAILS.

AMPHENOL PART NO. : RJE29-166-0X10

GOLD PLATING ON MATING AREA
1=6 u'' [0.15 MICRONS] GOLD
2=15 u" [0.38 MICRONS] GOLD
3=30 u" [0.76 MICRONS] GOLD
4=50 u" [1.25 MICRONS] GOLD

UNLESS SPECIFIED OTHERWISE	DRAWN Frank W	DATE NOV 18/13	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS MILLIMETERS	CHECKED Lawrence C	NOV 18/13	
SECONDARY	M.E. APP'D		TITLE MODULAR JACK, SINGLE PORT 6 POSITION, 6 CONTACT, WITHOUT SHIELDED – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.35mm	ENG. REL. NO.		DWG. NO. P-RJE29-166-0X10 REV B
2 DECIMAL PLACES ±0.30mm	REF.		
3 DECIMAL PLACES ±0.25mm	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.