


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JAN.09/2020	L.CHAN
B	PROPOSAL	FEB20/2020	L.CHAN
C	PROPOSAL	FEB24/2020	L.CHAN

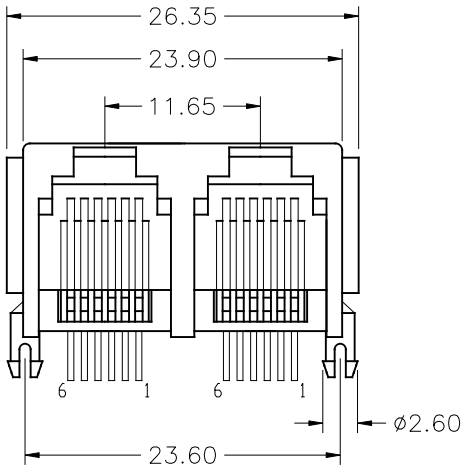

TOP VIEW

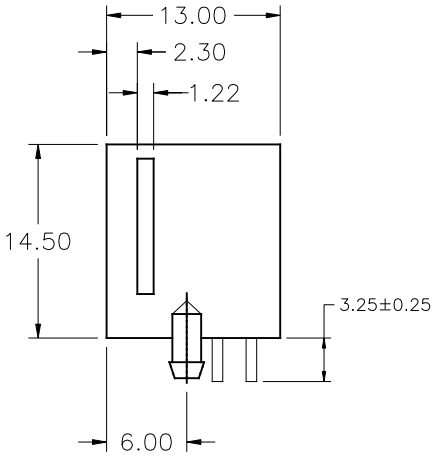

SIDE VIEW

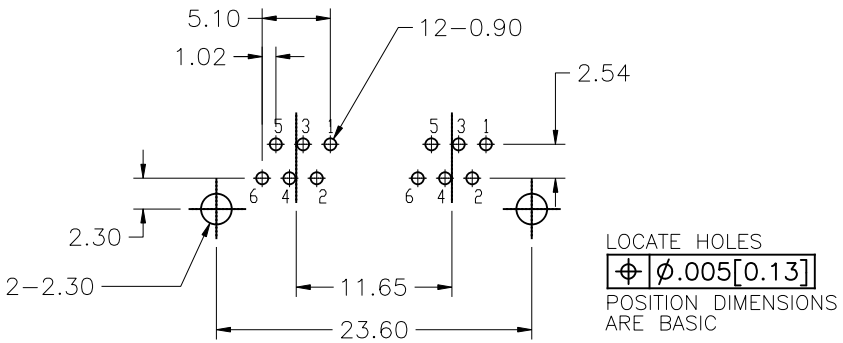

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05 (TOP VIEW)

NOTES:

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY UL94V-0

COLOUR: BLACK

CONTACTS: COPPER ALLOY,

PLATING: GOLD PLATING ON ENTIRE CONTACT
SEE AMPHENOL PART NUMBER FOR DETAIL.
50 u" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE

AMPHENOL PART NO. : RJE29-266-0X20

GOLD PLATING ON MATING AREA
1= 6 u" [0.15 MICRONS] GOLD
2=15 u" [0.38 MICRONS] GOLD
3=30 u" [0.76 MICRONS] GOLD
4=50 u" [1.25 MICRONS] GOLD

UNLESS SPECIFIED OTHERWISE	DRAWN JACK.GUO	DATE JAN.09/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETERS	CHECKED L.CHAN	JAN.09/20	
SECONDARY	M.E. APP'D		TITLE: MODULAR JACK, 1X2 PORT 6 POSITION, 6 CONTACT, WITHOUT SHIELD WITH FLANGE – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.35mm	ENG. REL. NO.		
2 DECIMAL PLACES ±0.30mm	REF.		DWG. NO. P-RJE29-266-0X20 REV C
3 DECIMAL PLACES ±0.25mm	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.