


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	AUG 07/19	L.CHAN
B	PROPOSAL	AUG 07/19	L.CHAN
C	PROPOSAL	AUG 20/19	L.CHAN
D	MODIFY THE TABS	AUG 30/19	L.CHAN
E	MODIFY THE STANDOFF	FEB.18/20	L.CHAN
F	Modify the top tabs	Apr.28/20	L.CHAN

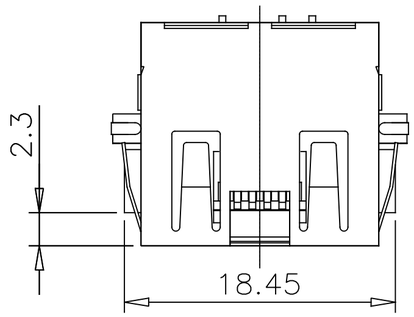


TOP VIEW

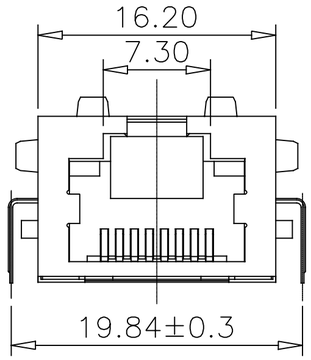


FRONT VIEW




BOTTOM VIEW

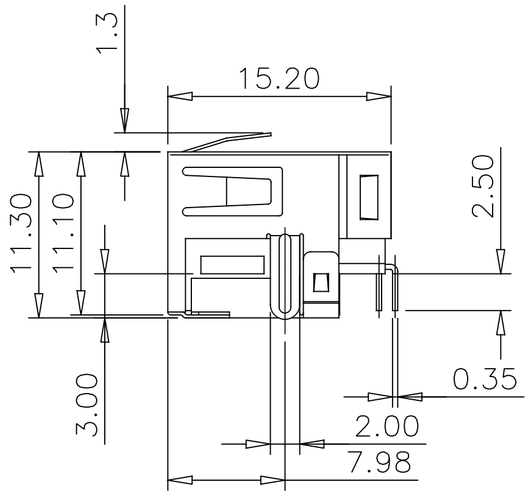


SIDE VIEW

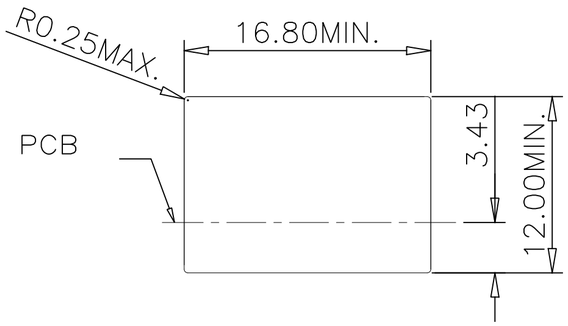

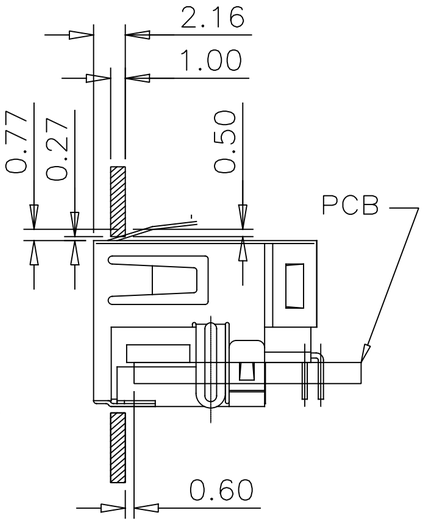

RECOMMENDED PANEL CUTOUT

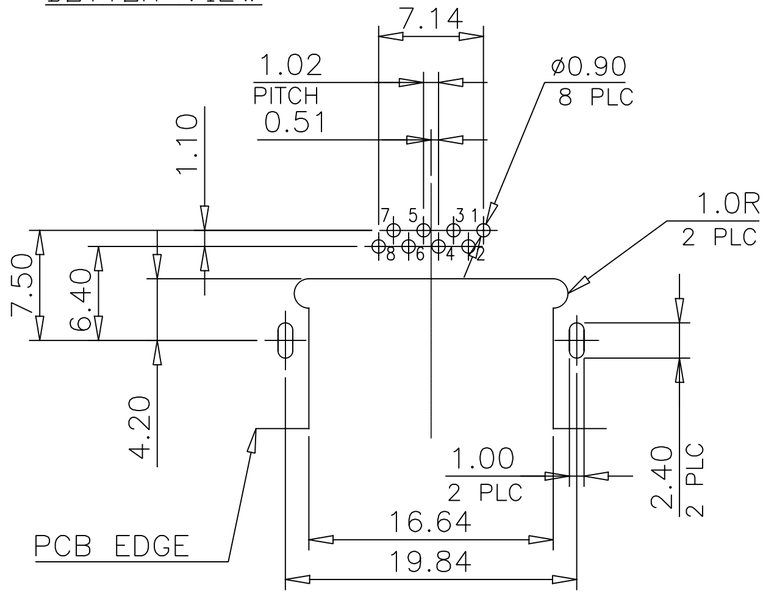

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05

LOCATE HOLES
⌖ 0.13[.005]
POSITION DIMENSIONS
ARE BASIC

MATERIALS:
HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V–0
COLOUR: BLACK


CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES SEE AMPHENOL PART NUMBER FOR DETAIL.
50 µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE
100µ" TIN or Gold Flash PLATING ON CONTACT SOLDER TAIL.
SHIELD: COPPER ALLOY PLATED NICKEL.


AMPHENOL PART NUMBER: RJE2K–188–1X03–T
└GOLD PLATING
0 = GOLD FLASH
1 = 6 µ INCH
2 = 15 µ INCH
3 = 30 µ INCH
4 = 50 µ INCH


UNLESS SPECIFIED OTHERWISE	DRAWN HANSON.C	DATE AUG 07/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	AUG 07/19	
SECONDARY	M.E. APP'D		TITLE: 1 PORT MODULAR JACK, WITHOUT LED SHIELD WITH TOP & SIDE TABS, 8P8C T/R PACKAGING –RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		DWG. NO. P–RJE2K–188–1X03–T REV F
1 DECIMAL PLACE ±0.30	ENG. REL. NO.		
2 DECIMAL PLACES ±0.25	REF.		CODE ID NO. 03554 | DWG SIZE: C | SCALE: N/A | SHEET 1 OF 2
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	
ANGULAR DEGREES ±1.0°			


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	AUG 07/19	L.CHAN
B	PROPOSAL	AUG 07/19	L.CHAN
C	PROPOSAL	AUG 20/19	L.CHAN
D	MODIFY THE TABS	AUG 30/19	L.CHAN
E	MODIFY THE STANDOFF	FEB.18/20	L.CHAN
F	Modify top tabs	Apr.28/20	L.CHAN

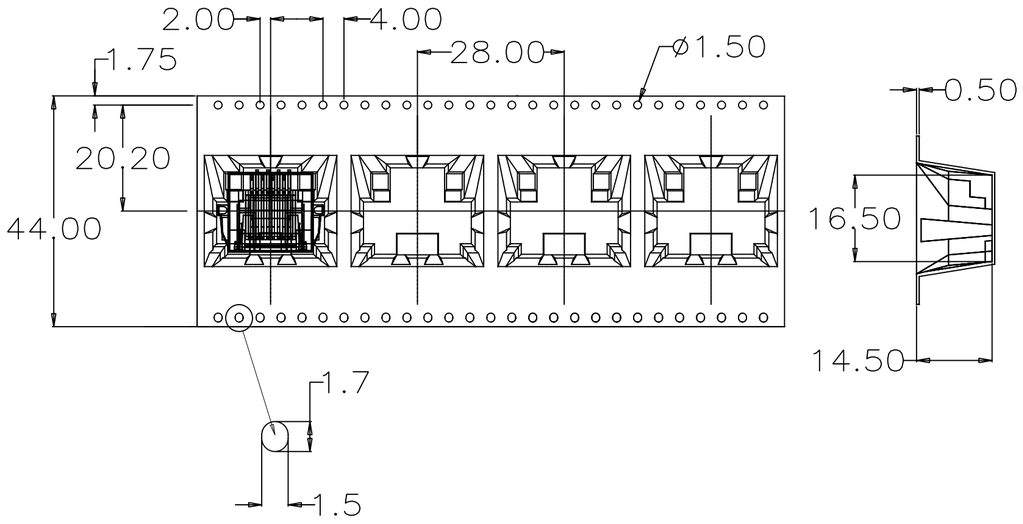

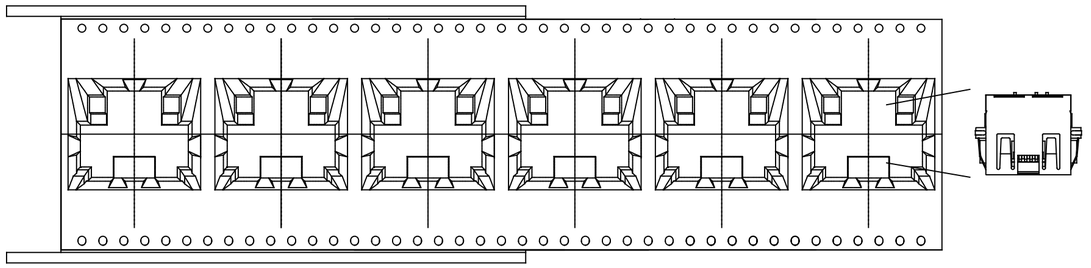

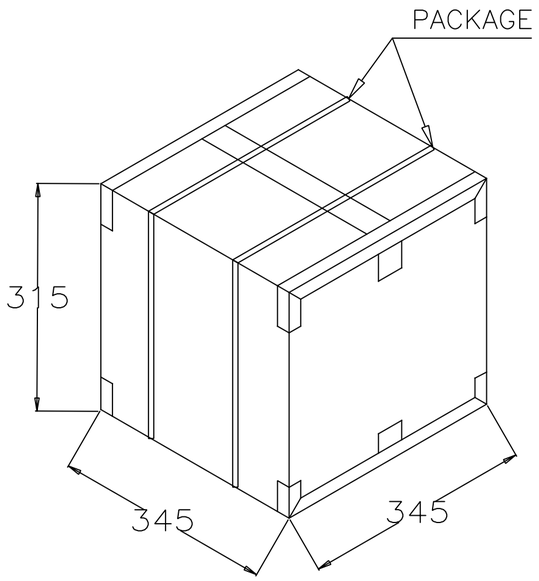

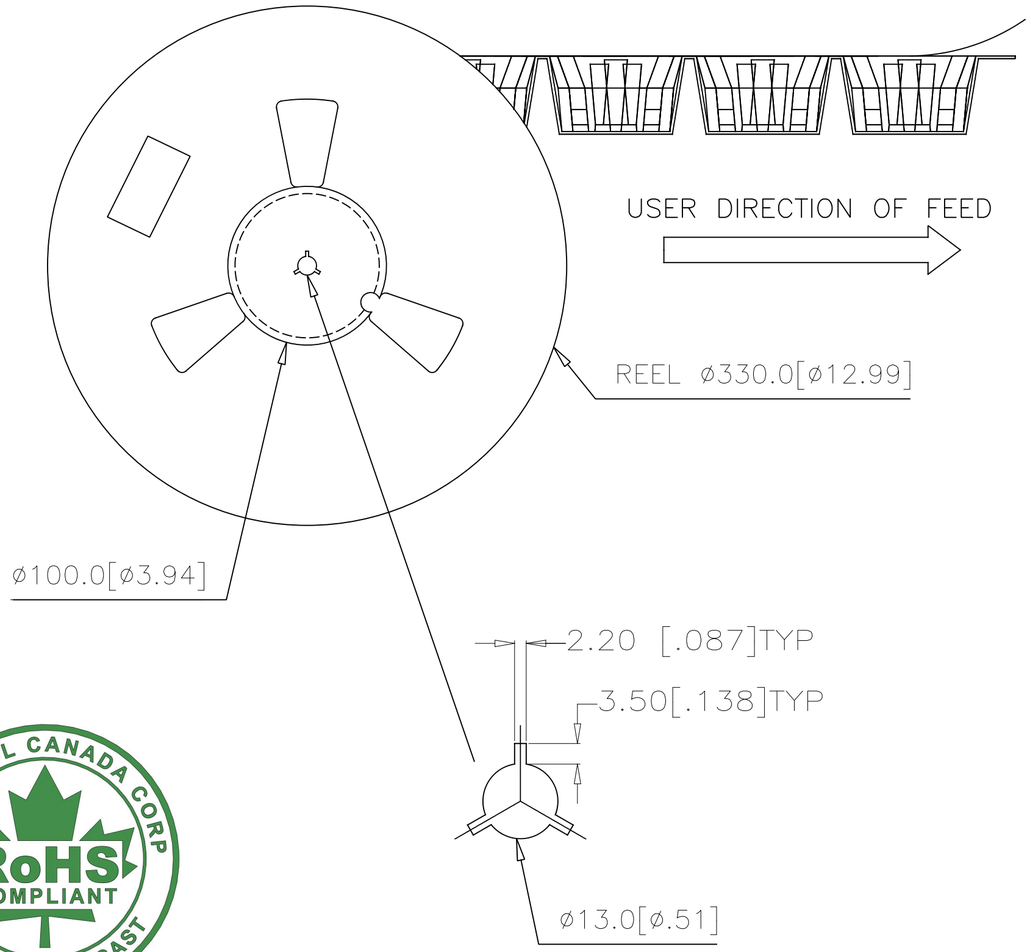

PACKAGING NOTES:

1. ONE REEL SHOULD HOLD 150 CONNECTORS.

2. 10 EMPTY CAVITIES FOR REAR AND 10 EMPTY CAVITIES FOR FRONT OF THE CARRIER.

3. A FULLY LOADED CARTON SHOULD CONTAIN 6 REELS (900 PCS) OF CONNECTOR.

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN HANSON.C	DATE AUG 07/19
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	AUG 07/19
SECONDARY	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.30	ENG. REL. NO.	
2 DECIMAL PLACES ±0.25	REF.	
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

Amphenol Canada Corp.
Commercial Products

TITLE
1 PORT MODULAR JACK, WITHOUT LED SHIELD WITH TOP & SIDE TABS, 8P8C T/R PACKAGING –RoHS COMPLIANT

DWG. NO.	REV
P–RJE2K–188–1X03–T	F

CODE ID NO. 03554	DWG SIZE: C	SCALE: N/A	SHEET 2 OF 2