


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	NEW PROPOSAL	APR14/22	L.CHAN

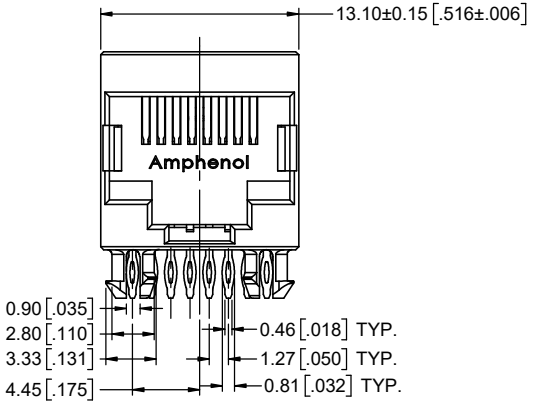


FRONT VIEW

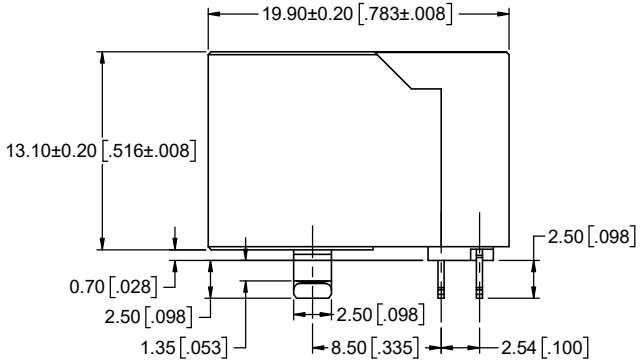


SIDE VIEW

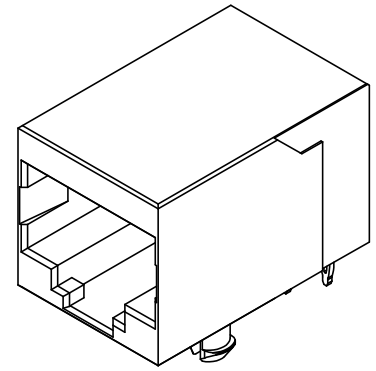


ISOMETRIC VIEW

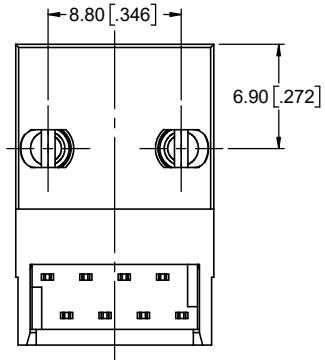

BOTTOM VIEW

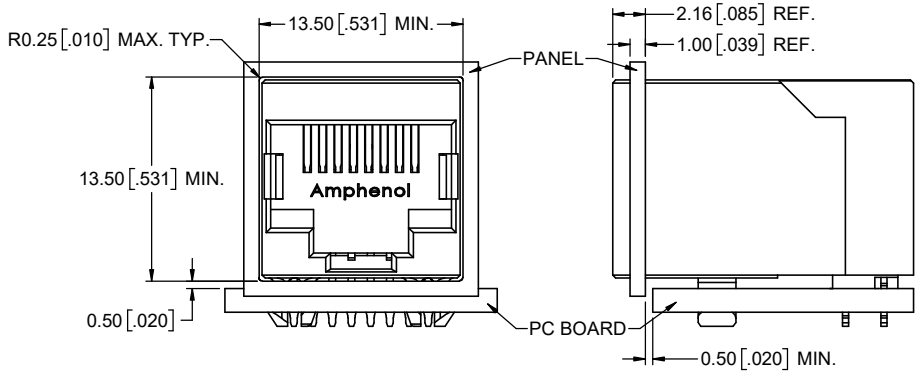

RECOMMENDED PANEL CUTOUT

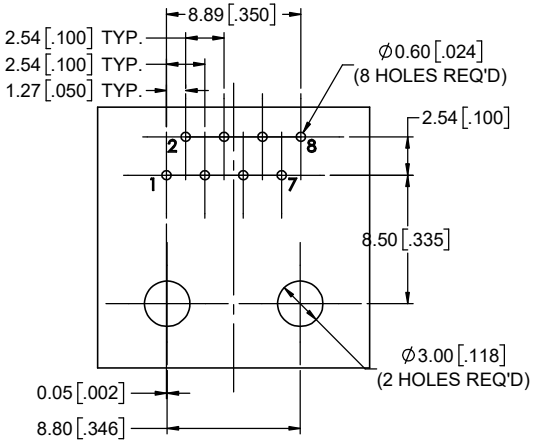

RECOMMENDED PCB LAYOUT
(RECOMMEND THE PCB THICKNESS: 1.57 [.062])
(TOLERANCE: ±0.05 [±.002])
(COMPONENT SIDE OF BORAD)

NOTES:

1. MATERIALS:
   PLASTIC HOUSING: ENGINEERING THERMOPLASTIC FLAMMABILITY RATING UL94V-0,
   COLOR: BLACK
   CONTACT: PHOSPHOR BRONZE
   PLATNG: SELECTIVE GOLD PLATING ON MATING SURFACE
   SEE AMPHENOL PART NUMBER FOR DETAIL,
   100u" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS
   50u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.

2. THE REMOVAL FORCE OF PRESS FIT CONTACT SHOULD BE IN RANGE OF 10N PER PIN.

AMPHENOL PART NUMBER: RJE56-188-0X10

GOLD PLATING OPTIONS:
1 = 6u" GOLD PLATING
2 = 15u" GOLD PLATING
3 = 30u" GOLD PLATING
4 = 50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	APR14/22
PRIMARY UNITS MILLIMETRES	CHECKED	KELVIN.T	APR14/22
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.38	ENG. REL. NO.		
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	
ANGULAR DEGREES ±1.5°			

Amphenol Canada Corp.
Commercial Products

SINGLE PORT MODULAR JACK, PRESS-FIT TYPE, 8 POSITION, 8 CONTACTS UNSHIELD, WITH GOLD PLATING OPTIONS -RoHS COMPLIANT

DWG. NO.	REV
P-RJE56-188-0X10	A

CODE ID NO.	DWG SIZE	SCALE	SHEET
03554	X	4:1	1 OF 1