


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	OCT17/19	L.CHAN

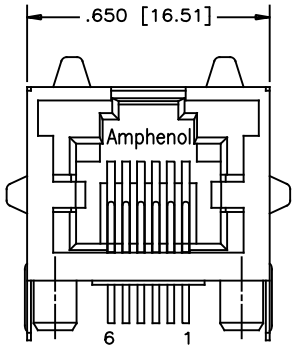


FRONT VIEW

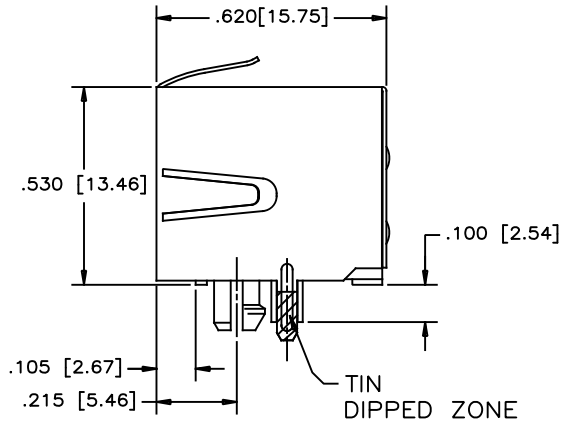

SIDE VIEW

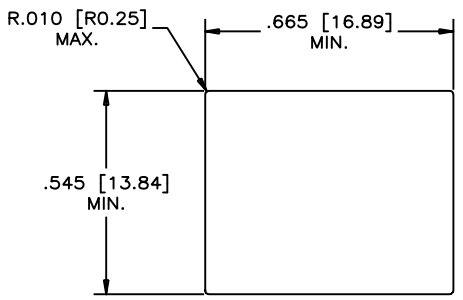

RECOMMENDED PANEL CUTOUT

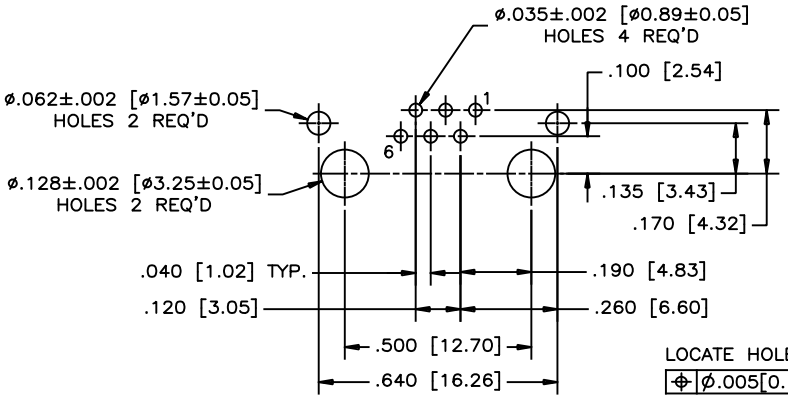

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
⌖ | Ø.005[0.13]
POSITION DIMENSIONS ARE BASIC

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V–0,
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 50 u " [1.27 MICRONS] MIN.
GOLD PLATED ON MATING SURFACES.
50 u " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 u " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN DIPPED ON SOLDER TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM
FOR 5 SEC MAXIMUM.

ENVIRONMENTAL: OPERATING TEMPERATURE: –55°C to 85°C

AMPHENOL PART NUMBER: RJHSE–7460

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN W.QIU	OCT17/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCH SECONDARY UNITS MILLIMETER REFERENCE IN PARENTHESES	CHECKED L.CHAN	OCT17/19	HIGH SPEED MODULAR JACK, 6 POS., 4 STAMPED CONTACTS, SHIELD WITH SIDE GROUND TABS, –RoHS COMPLIANT
	M.E. APP'D		
	Q.A. APP'D		
1 DECIMAL PLACE ±0.025 2 DECIMAL PLACE ±0.020 3 DECIMAL PLACE ±0.015 ANGULAR DEGREES ±1°	DWG APP'D		DWG NO. P–RJHSE–7460 REV A
	ENG. REL. NO.		
	REF.		
THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING		CODE ID NO. 03554 | DWG SIZE: C | SCALE: N/A | SHEET 1 OF 1