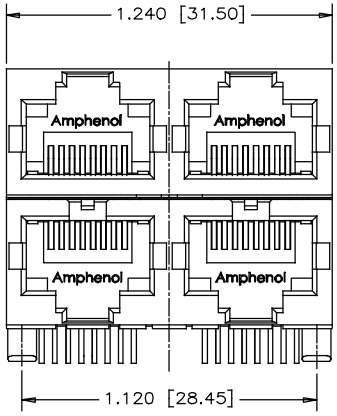
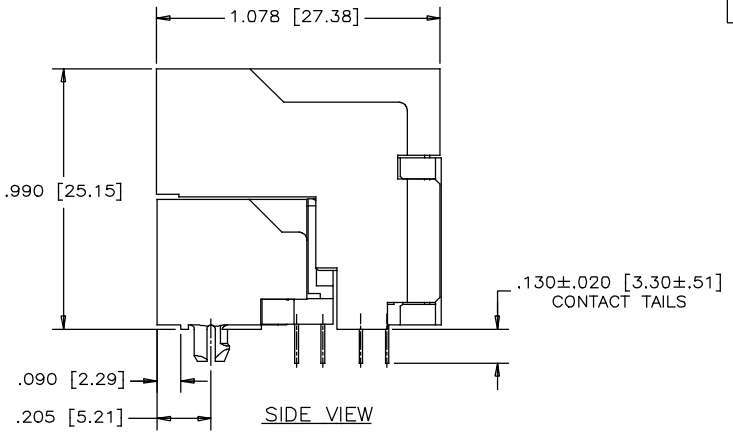
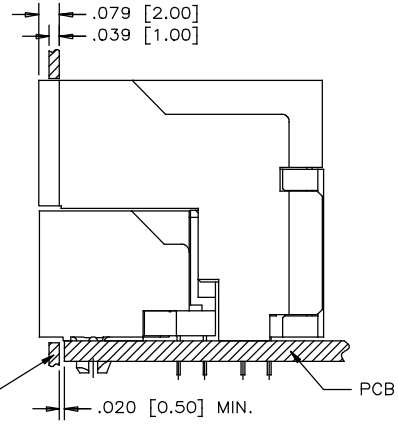
| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION, ECN, EAR NO. | DATE | APP'D |
| A | PROPOSAL | SEP23/19 | L.CHAN |



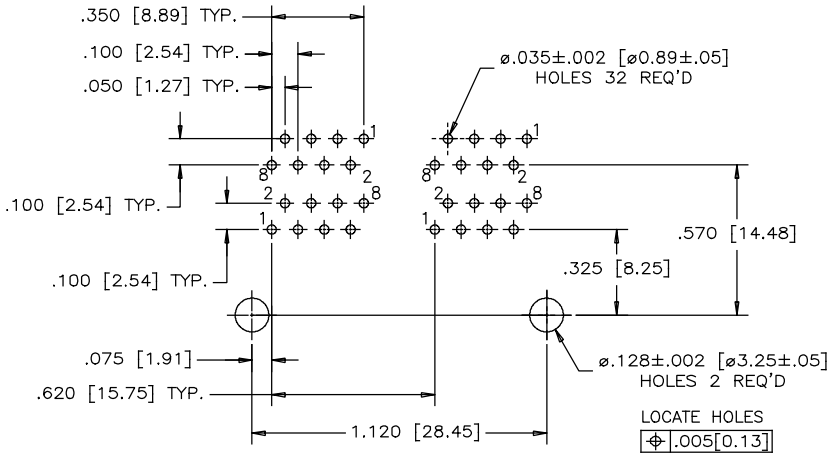

FRONT VIEW



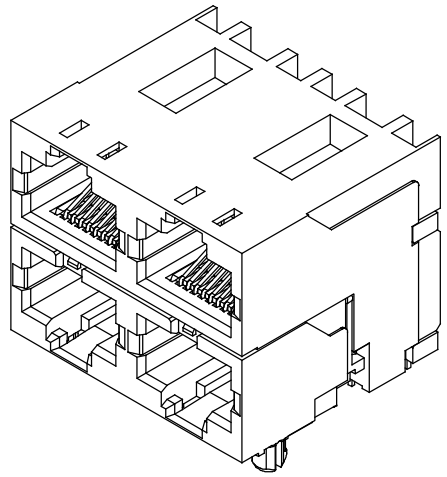

SIDE VIEW




RECOMMENDED PANEL CUTOUT




RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)



ISOMETRIC VIEW

NOTES:

1. MATERIALS:

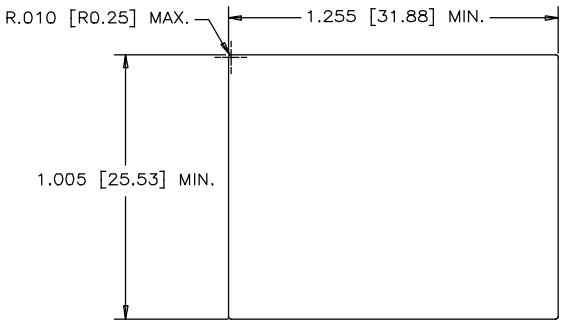
CONTACTS: PHOSPHOR BRONZE,
SELECTIVE GOLD PLATING ON MATING SURFACES
SEE PART NO. FOR THICKNESS.
50 MICROINCHES MIN. NICKEL OVERALL.
100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: ENGINEERING PLASTIC.
FLAMMABILITY RATING UL 94V-0, BLACK

2. RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING PEAKED AT 260°C FOR 10 SEC MAXIMUM

AMPHENOL PART NO.: RJSAE-X080-A4

GOLD PLATING OPTION:
D=6u" GOLD PLATING
G=15u" GOLD PLATING
J=30u" GOLD PLATING
5=50u" GOLD PLATING




RECOMMENDED PANEL CUTOUT

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

| | | | |
|---|---|---|---|
| UNLESS SPECIFIED OTHERWISE | DRAWN RONNIE.C | SEP23/19 | Amphenol Canada Corp. Commercial Products |
| PRIMARY UNITS INCHES | CHECKED KELVIN.T | SEP23/19 | STACKABLE 2x2 PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT LED, 0.130INCH CONTACT TAILS, UNSHIELDED – RoHS COMPLIANT |
| SECONDARY MILLIMETERS | M.E. APP'D | | |
| REFERENCE IN PARENTHESES | Q.A. APP'D | | |
| GENERAL TOLERANCES | DWG APP'D | | DWG NO. P-RJSAE-X080-A4 REV A |
| 1 DECIMAL PLACE | ENG. REL. NO. | | |
| 2 DECIMAL PLACES | REF. | | |
| 3 DECIMAL PLACES ±.015 | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING | CODE ID NO. 03554 \| DWG SIZE X \| SCALE 1:1 \| SHEET 1 OF 1 |
| ANGULAR DEGREES ±1.5° | | | |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.