


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP23/19	L.CHAN

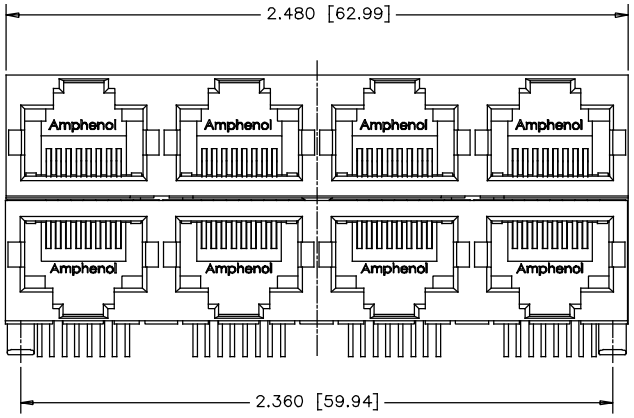


FRONT VIEW

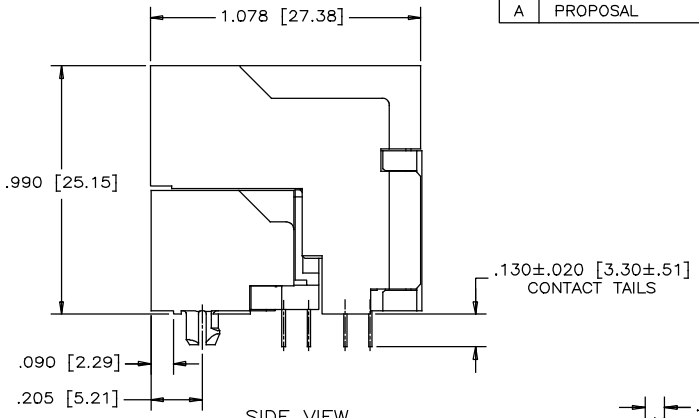


SIDE VIEW




ISOMETRIC VIEW
(SCALE 1:2)

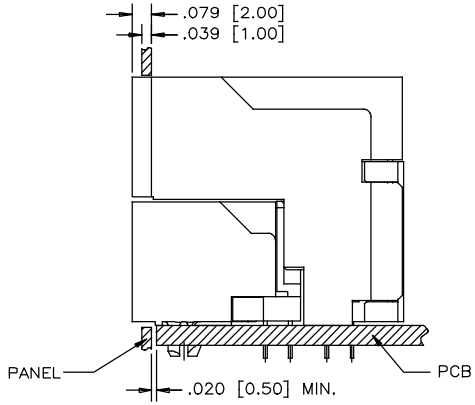

RECOMMENDED PANEL CUTOUT

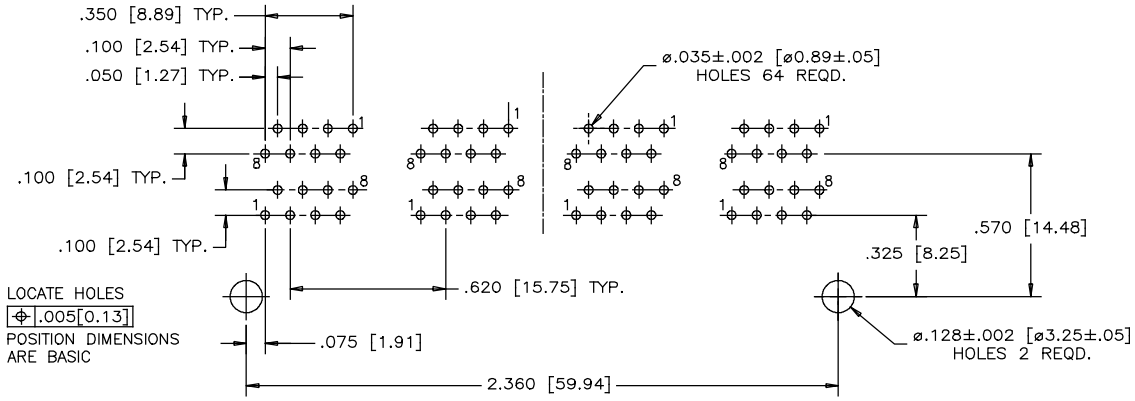

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)

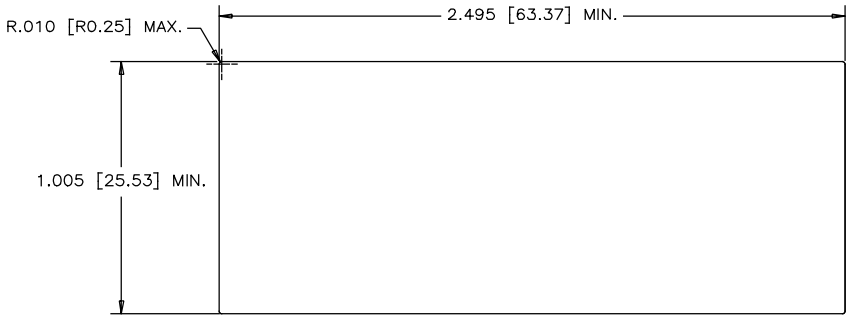

RECOMMENDED PANEL CUTOUT

NOTES:

1. MATERIALS:

CONTACTS: PHOSPHOR BRONZE,
SELECTIVE GOLD PLATING ON MATING SURFACES
SEE PART NO. FOR THICKNESS.
50 MICROINCHES MIN. NICKEL OVERALL.
100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: ENGINEERING PLASTIC.
FLAMMABILITY RATING UL 94V-0, BLACK

2. RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING PEAKED AT 260°C FOR 10 SEC MAXIMUM

AMPHENOL PART NO.: RJSAE-X080-A8

GOLD PLATING OPTION:
D=6u" GOLD PLATING
G=15u" GOLD PLATING
J=30u" GOLD PLATING
5=50u" GOLD PLATING

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	SEP23/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	SEP23/19	
SECONDARY MILLIMETERS	M.E. APP'D		STACKABLE 2x4 PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT LED, 0.130INCH CONTACT TAILS, UNSHIELDED – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P-RJSAE-X080-A8 REV A
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE X SCALE 1:1 SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.