


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR14/20	L.CHAN

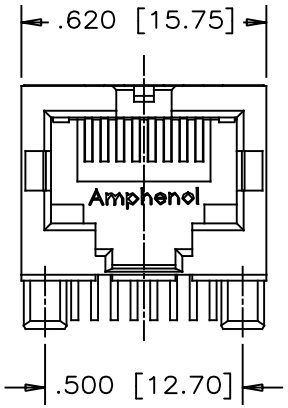


FRONT VIEW

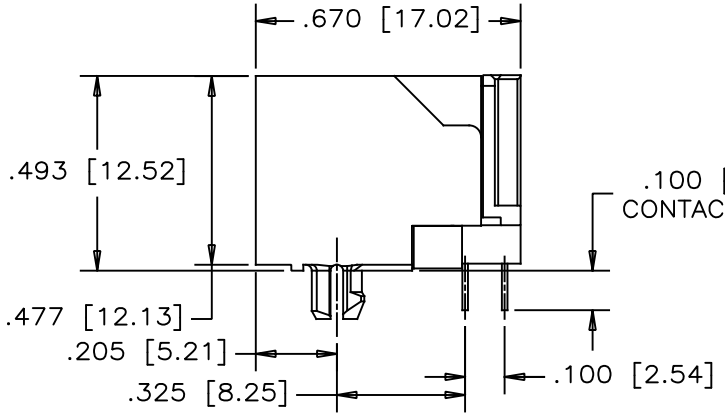


SIDE VIEW

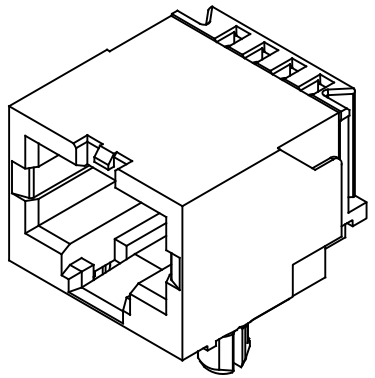

ISOMETRIC VIEW

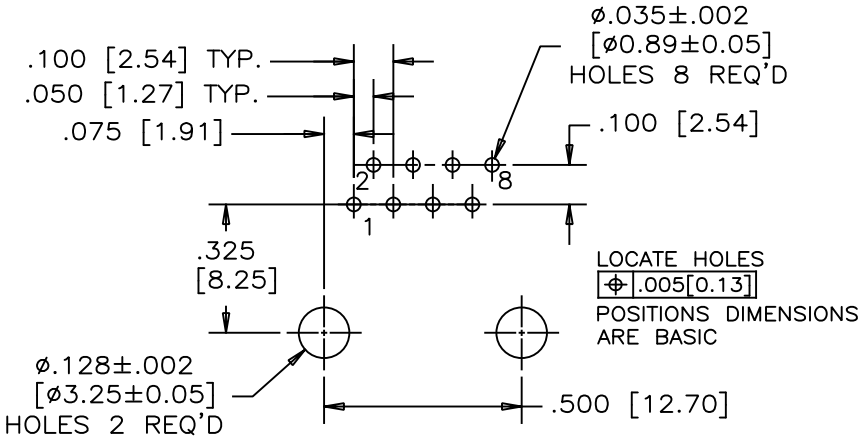

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE OF BOARD)

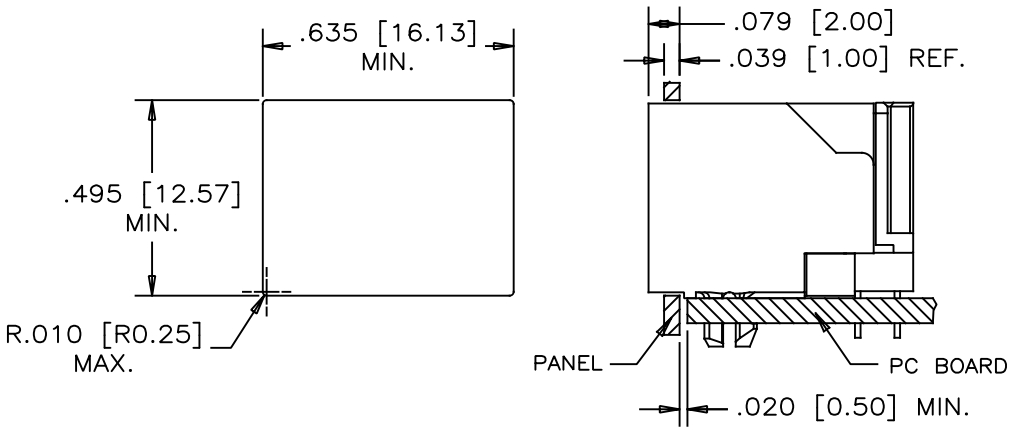

RECOMMENDED PANEL CUTOUT

MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC. FLAMMABILITY RATING UL 94V–0, COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE, SEE PART NO. FOR THICKNESS.
50μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100μ" [2.54 MICRONS] MIN. MATTE–TIN OR GOLD FLASH ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260° MAXIMUM FOR 5~8 SECONDS.

AMPHENOL PART NUMBER: RJSBE–X080–C1

GOLD PLATING OPTIONS:
D= 6μ" GOLD PLATING
G= 15μ" GOLD PLATING
J= 30μ" GOLD PLATING
5= 50μ" GOLD PLATING

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	APR14/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	APR14/20	
SECONDARY MILLIMETERS	M.E. APP'D		SINGLE PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED GOLD PLATING OPTION, WITHOUT LED –RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P–RJSBE–X080–C1 REV A
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE 1:1 | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.