


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP23/19	L.CHAN

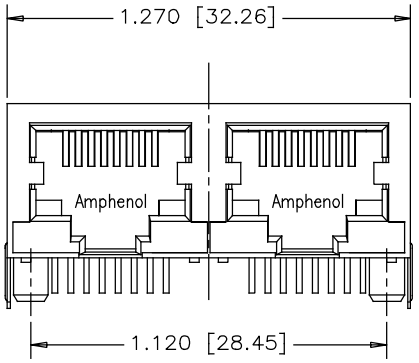


FRONT VIEW

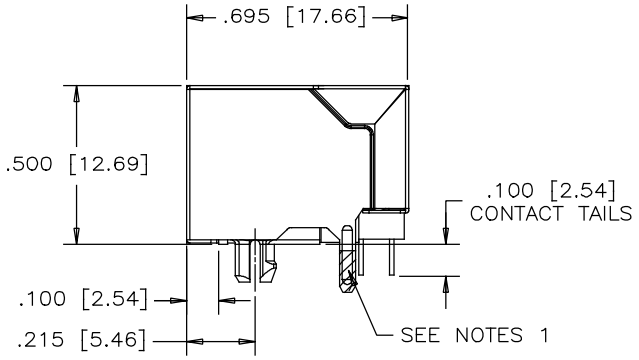

SIDE VIEW

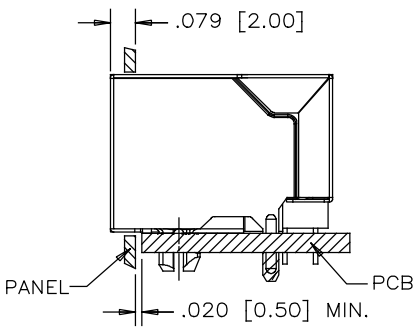

RECOMMENDED PANEL CUTOUT

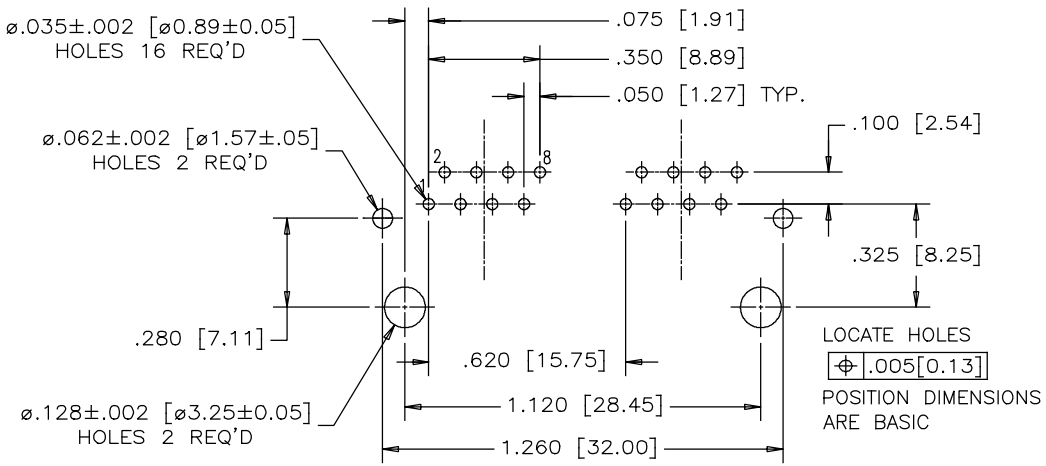

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:

1. MATERIALS:

CONTACTS: PHOSPHOR BRONZE,
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
50 MICRO" MIN. NICKEL OVERALL.
100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: ENGINEERING THERMOPLASTIC
COLOR – BLACK.
FLAMMABILITY RATING UL 94V–0


SHIELD: COPPER ALLOY
PLATING: NIVKEL WITH TIN FINISHED ON PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE

WAVE SOLDERING PEAKED AT 260°C FOR 10 SECONDS MAX.

AMPHENOL PART NO.: RJSBE–XF80–C2

GOLD PLATING OPTION:
D = 6u'' GOLD PLATING
G = 15u'' GOLD PLATING
J = 30u'' GOLD PLATING
5 = 50u'' GOLD PLATING

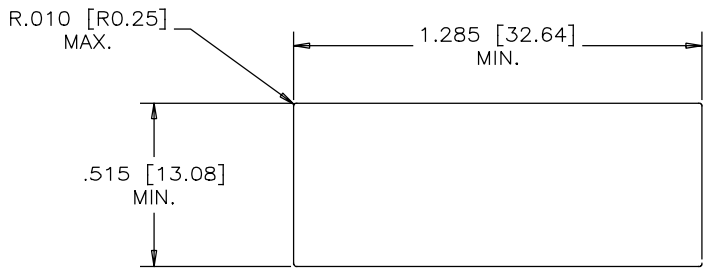

RECOMMENDED PANEL CUTOUT

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	SEP23/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	SEP23/19	
SECONDARY MILLIMETERS	M.E. APP'D		TWO PORTS MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT LED, SHIELDED WITHOUT TABS, GOLD PLATING OPTIONS – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P–RJSBE–XF80–C2 REV A
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE N/A | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.