


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP23/19	L.CHAN

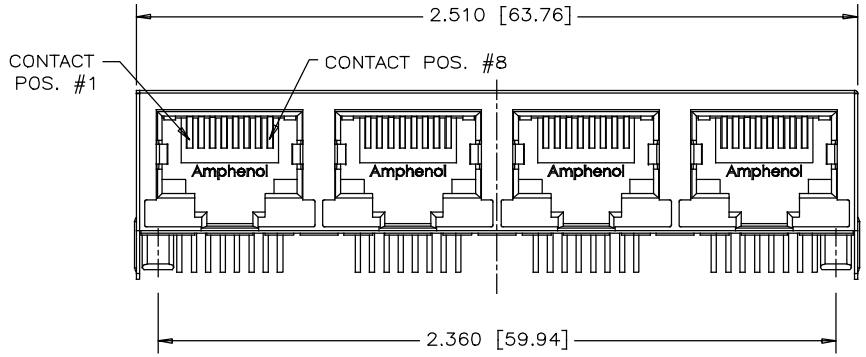


FRONT VIEW

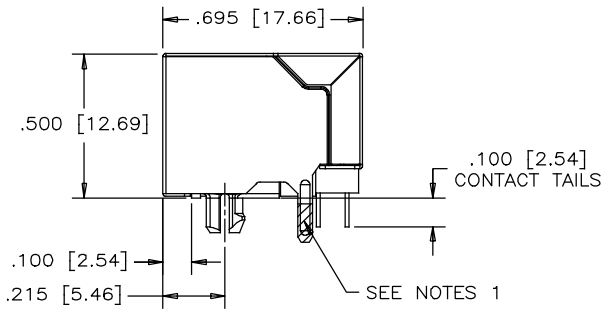

SIDE VIEW

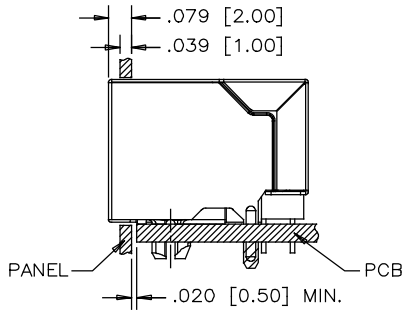

RECOMMENDED PANEL CUTOUT

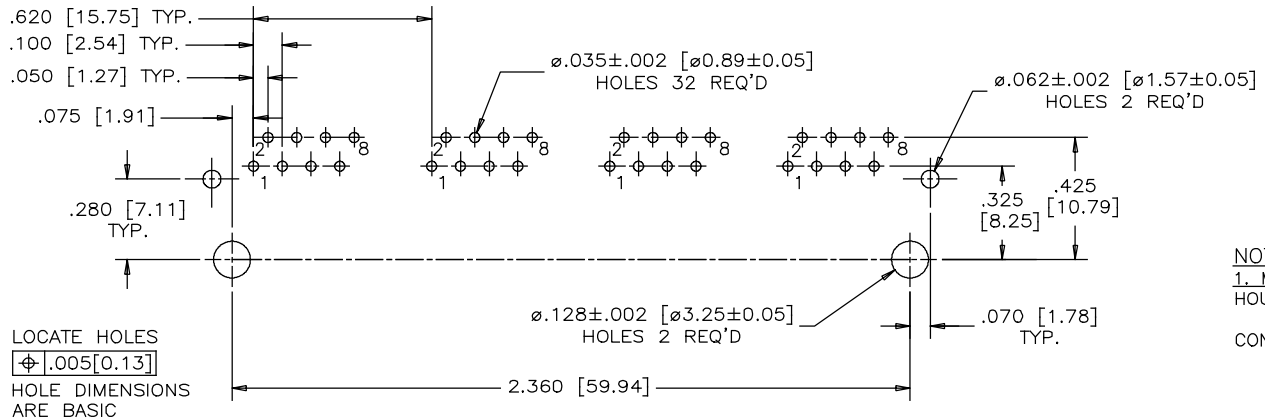

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:

1. MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC.
FLAMMABILITY RATING UL 94V-0, COLOR: BLACK


CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE,
SEE PART NO. FOR THICKNESS.
50µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100µ" MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN FINISHED ON PCB TAILS

2. RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT PEAKED 260°C FOR 10 SEC MAXIMUM

AMPHENOL PART NUMBER: RJSBE-XF80-C4

GOLD PLATING OPTIONS:
D= 6µ" GOLD PLATING
G= 15µ" GOLD PLATING
J= 30µ" GOLD PLATING
5= 50µ" GOLD PLATING

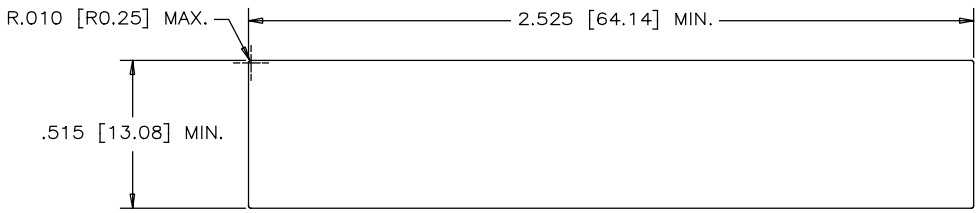

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	SEP23/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	SEP23/19	4 PORT MODULAR JACK, 8 POSITIONS, 8 CONTACTS, WITHOUT LED, SHIELDED WITHOUT TAB, GOLD PLATING OPTIONS -RoHS COMPLIANT
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P-RJSBE-XF80-C4 REV A
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE 1:1 | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.