


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL PER EAR# RJ20049	JUL22/20	L.CHAN

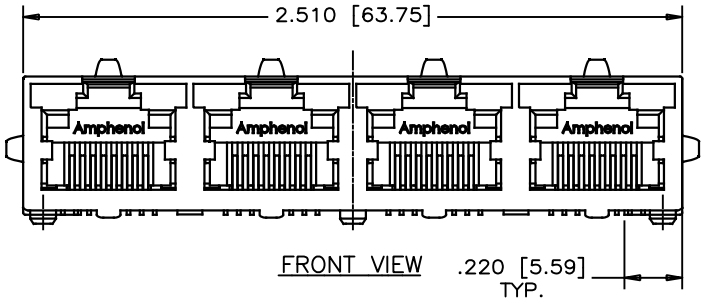


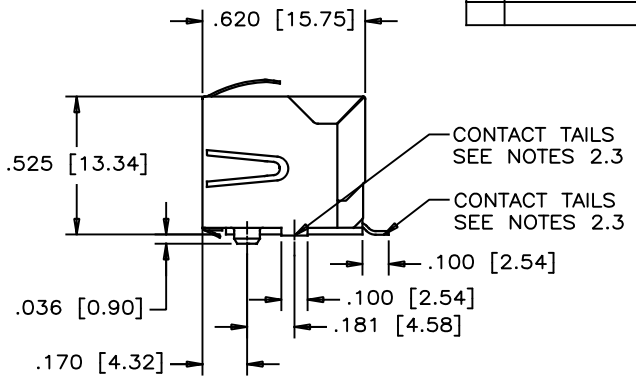

SIDE VIEW

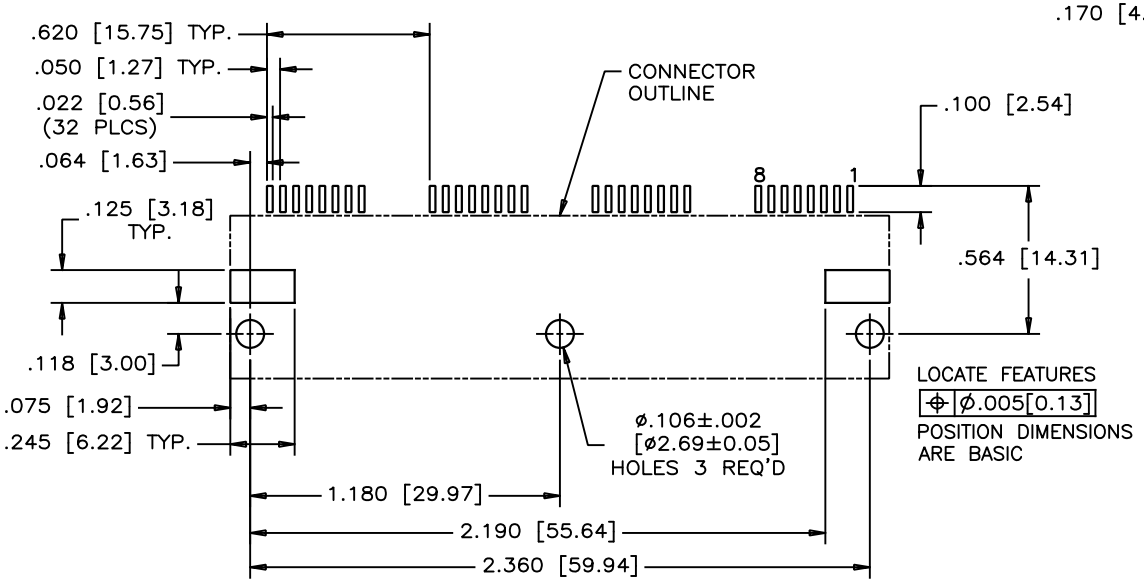

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

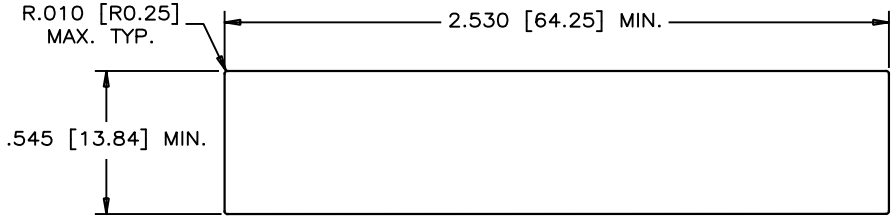

RECOMMENDED PANEL CUTOUT

1. MATERIALS:
1.1 PLASTIC HOUSING: HIGH ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

1.2 CONTACTS: PHOSPHOR BRONZE
PLATING: 20 μ" [0.51 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS

1.3 SHIELD: COPPER ALLOY
PLATING: NICKLE

2. PHYSICAL CHARACTERISTICS
2.1 MSL RATING: LEVEL 1
2.2 DURABILITY: 750 CYCLES
2.3 COPLANARITY SPECIFICATION:
WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL CONTACTS TAIL AND BOTH SHIELD TABS IS .004[0.10]

3. ELECTRICAL
3.1 HI-POT: CONTACT TO SHIELD 1500 VAC PEAK.
CONTACT TO CONTACT 1000 VAC PEAK.


4. RECOMMENDED SOLDERING TEMPERATURE:
REFLOW SOLDERING AT 260°C MAXIMUM FOR 10 SEC MAXIMUM.


5. AMPHENOL PART NUMBER: RJSSE-5380-14T

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	JUL22/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	JUL22/20	
SECONDARY MILLIMETERS	M.E. APP'D		4 PORT, SURFACE MOUNT, RJ45 MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED WITHOUT LIGHT PIPE, WITH 0.90MM HOUSING PEGS, T&R PACKAGING -RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF. EAR# RJ20049		DWG NO. P-RJSSE-5380-14T REV A
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE N/A | SHEET 1 OF 2
ANGULAR DEGREES ±1.5°			


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL PER EAR# RJ20049	JUL22/20	L.CHAN

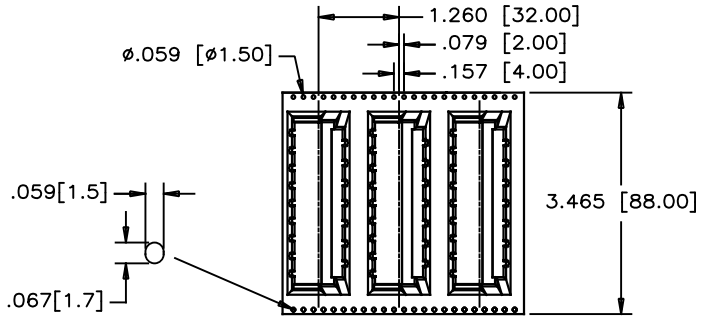







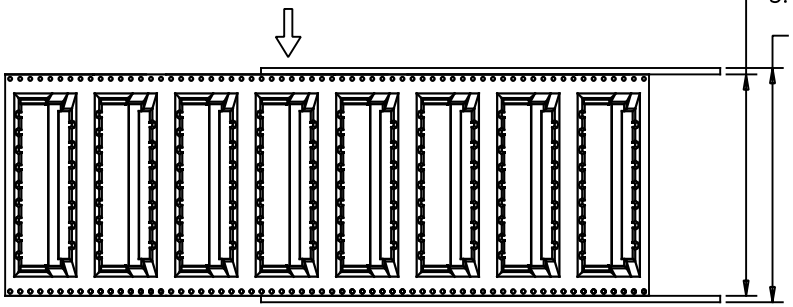




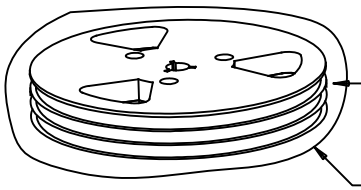

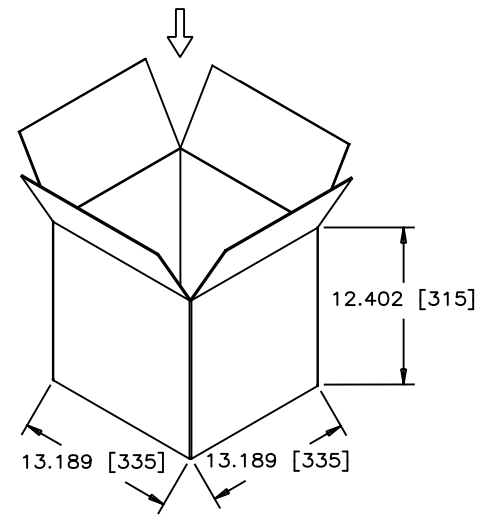

CARTON PACKAGING REFERENCE
(DIMS SHOWN INSIDE OF BOX)

DIRECTION OF CONNECTOR LOADED INTO MACHINE.
LEADS FACING FRONT SIDE

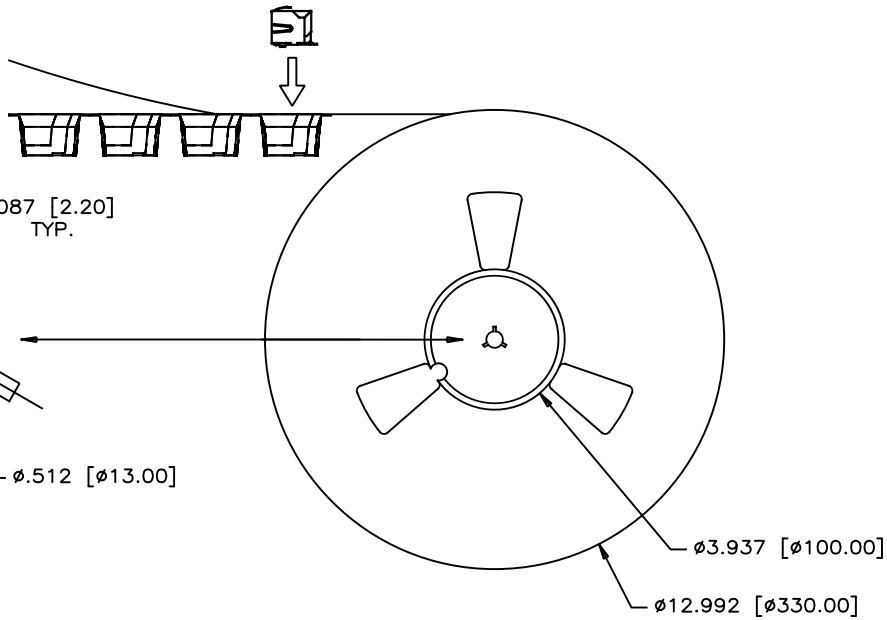

PACKAGING NOTES:
1. ONE REEL SHOULD HOLD 120 CONNECTORS.
2. A FULLY LOADED CARTON SHOULD CONTAIN 3 REELS (360 PCS) OF CONNECTOR.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	JUL22/20
PRIMARY UNITS INCHES	CHECKED KELVIN.T	JUL22/20
SECONDARY MILLIMETERS	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APP'D	
1 DECIMAL PLACE	ENG. REL. NO.	
2 DECIMAL PLACES	REF. EAR# RJ20049	
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.5°		

Amphenol Canada Corp.
Commercial Products

4 PORT, SURFACE MOUNT, RJ45 MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED WITHOUT LIGHT PIPE, WITH 0.90MM HOUSING PEGS, T&R PACKAGING –RoHS COMPLIANT

DWG NO. P–RJSSE–5380–14T REV A

CODE ID NO. 03554 | DWG SIZE X | SCALE N/A | SHEET 2 OF 2