


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	PROPOSAL	FEB05/07	L.CHAN
D	FIX THE ERROR FOR VIEW	JUN01/20	L.CHAN
E	FIX THE ERROR FOR VIEW	JUN30/20	L.CHAN




TOP VIEW

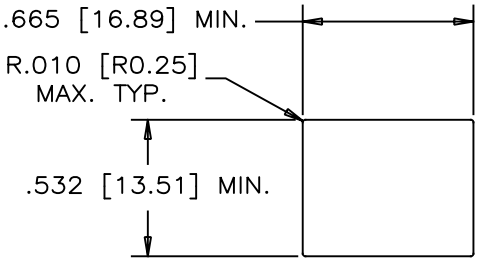


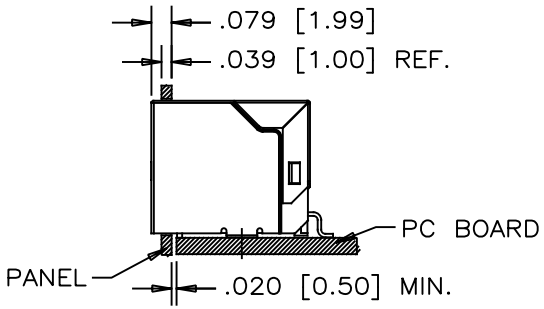


RECOMMENDED PANEL CUTOUT



ISOMETRIC VIEW



FRONT VIEW

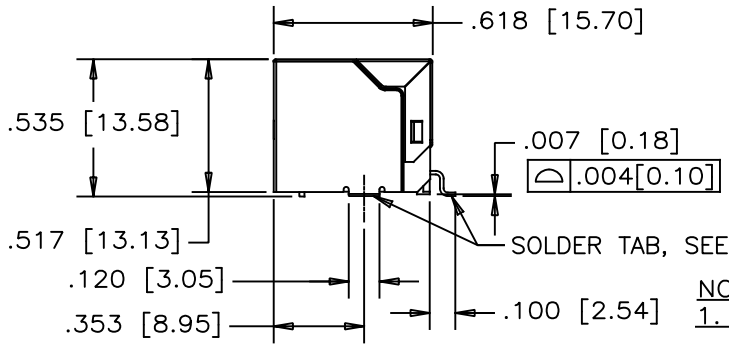

SIDE VIEW

NOTES:

1. MATERIALS:


HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V–0,
COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 20 μ" [.508 MICRONS] MIN.
GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS] MIN.
NICKEL UNDERPLATE.
100 μ" [2.54 MICRONS] MIN.
MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL

2. COPLANARITY SPECTION:
WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN SHIELD TAIL AND ALL TERMINAL TAILS IS .004 [0.10].

AMPHENOL PART NUMBER: RJSSE–5F80

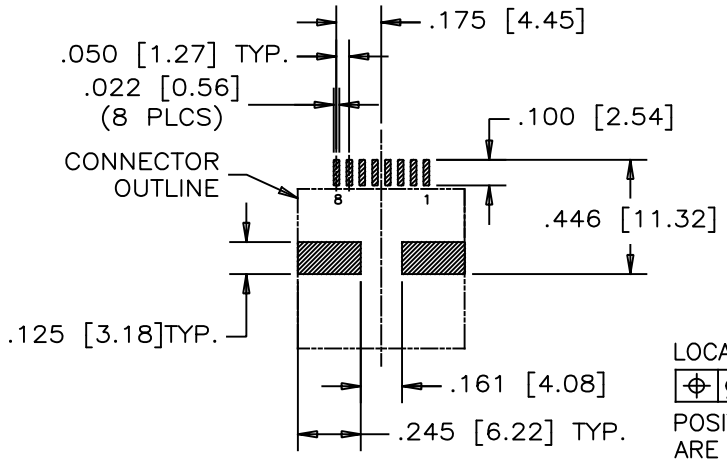

LOCATE FEATURES
⌖ Ø.005[0.13]
POSITION DIMENSIONS ARE BASIC

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

UNLESS SPECIFIED OTHERWISE	DRAWN Chigow	SEP08/06	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED L.CHAN	SEP08/06	
SECONDARY MILLIMETERS	M.E. APP'D		SINGLE PORT, SURFACE MOUNT RJ45, 8 POSITION, 8 CONTACTS, SHIELDED WITHOUT TABS, WITHOUT LIGHT PIPE, TRAY PACKAGING –RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P–RJSSE–5F80 REV E
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE N/A | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.