



| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION, ECN, EAR NO. | DATE | APP'D |
| A | PROPOSAL DRAWING | SEP06/12 | L.CHAN |
| B | ADD DIMENSION | JUN04/18 | L.CHAN |
| C | ADD NOTES | APR08/21 | L.CHAN |

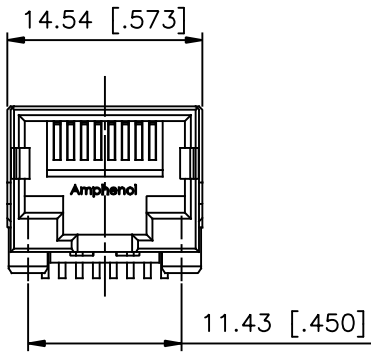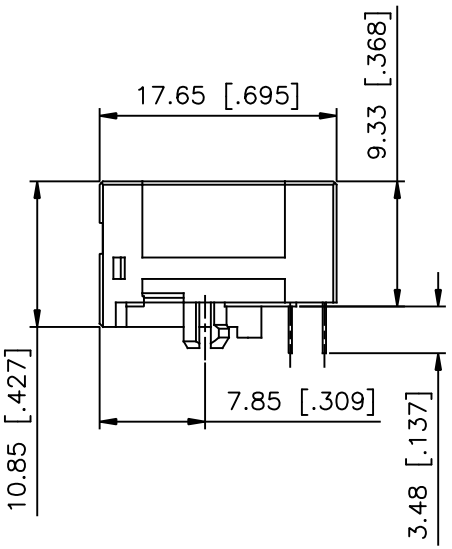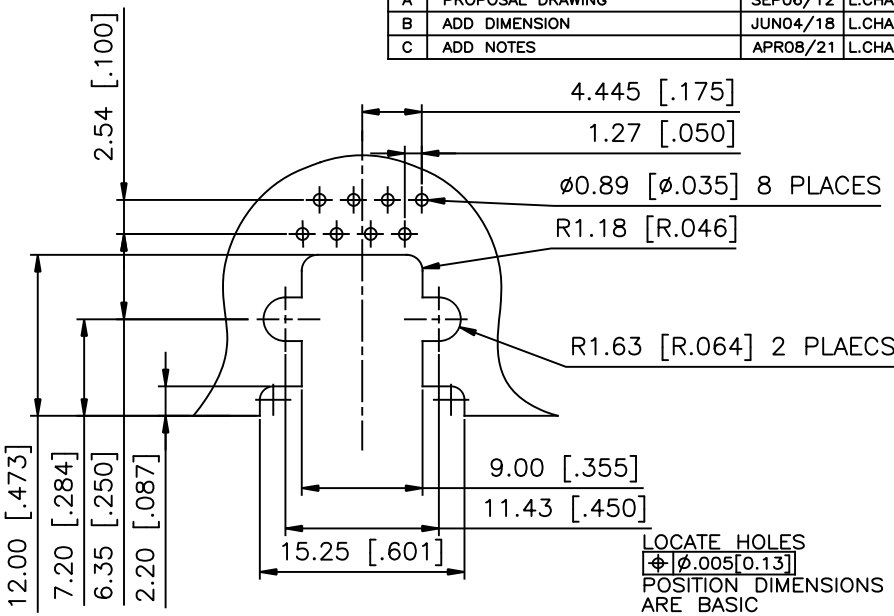


RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05 [.002]





NOTES:

1.MATERIALS:
HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC.
FLAMMABILITY RATING UL 94V–0
COLOUR: BLACK
CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
50 u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 u" [2.54 MICRONS] MIN. MATTE TIN ON SOLDER AREA.
2.RJ CONNECTOR IS TIA 1096A COMPIANT.

AMPHENOL PART NUMBER: RJULE–4X180–01

CONTACT PLATING GOLD
0 = GOLD FLASH
1 = 15u''
2 = 30u''
3 = 50u''

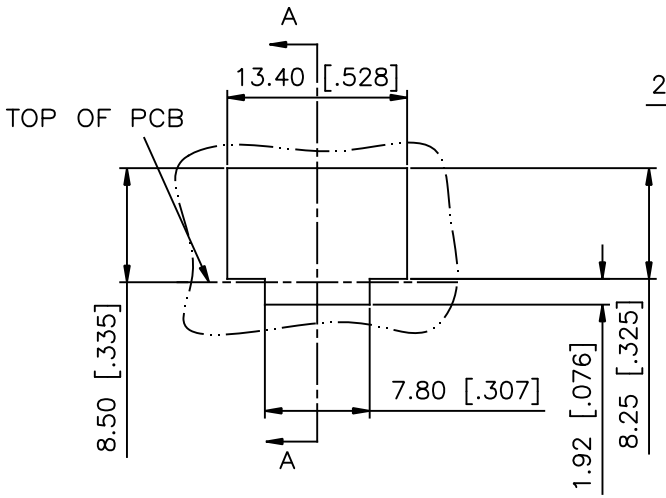


SECTION A–A

RECOMMENDED PANEL CUTOUT

| | | | |
|---|---|---|---|
| UNLESS SPECIFIED OTHERWISE | DRAWN G.HSIA | SEP06/12 | Amphenol Canada Corp. Commercial Products |
| PRIMARY UNITS MILLIMETERS | CHECKED L.CHAN | SEP06/12 | |
| SECONDARY INCHES | M.E. APP'D | | RJ ULTRA LOW PROFILE MODULAR JACK 8 POSITION, 8 CONTACTS, WITHOUT SHIELD. –RoHS COMPLIANT |
| REFERENCE IN PARENTHESES | Q.A. APP'D | | |
| GENERAL TOLERANCES | DWG APP'D L.CHAN | SEP06/12 | |
| 1 DECIMAL PLACE ±0.38 | ENG. REL. NO. | | DWG NO. P– RJULE–4X180–01 REV C |
| 2 DECIMAL PLACES ±0.25 | REF. | | |
| 3 DECIMAL PLACES | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING | CODE ID NO. 03554 \| DWG SIZE X \| SCALE N/A \| SHEET 1 OF 1 |
| ANGULAR DEGREES ±1.5° | | | |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.