



Heat Shrink Tubing



Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Wall Type: **Single Wall**

Expanded Inside Diameter (Min): **60.2 mm [2.37 in]**

Recovered Inside Diameter (Max): **16 mm [.63 in]**

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

Body Features

Material Systems Code	200
Fluid Type	Aviation Fuel, Chemicals/Solvents, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	3.8:1
Primary Product Material	Crosslinked Fluoroelastomer
Flexibility	Very Flexible

Dimensions

Recovered Wall Thickness (Nominal)	.15 mm[.006 in]
Product Length	63.5 mm[2.5 in]
Expanded Inside Diameter (Min)	60.2 mm[2.37 in]
Recovered Inside Diameter (Max)	16 mm[.63 in]

Usage Conditions

Shrink Temperature (Min)	175 °C
Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-40 – 200 °C[-40 – 392 °F]



Recovery Temperature

175 °C

Operation/Application

Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
-----------------------	--

Packaging Features

Packaging Method	Piece
------------------	-------

Other

Product Source	Mexico
----------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 9-120035-5
[HarnWare/HarnVis Purchase Charge](#)




TE Part # 9-120035-6
[HarnWare/HarnVis Renewal Charge](#)

Customers Also Bought



TE Part #013750-000
[AA-400-128-MK3-EL-KIT-120](#)

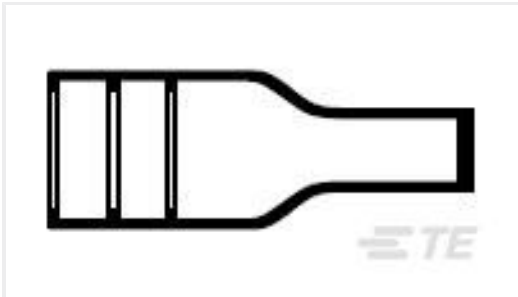

TE Part #824679-000
[202D153-25-07-0](#)



TE Part #04-0761-0538
[DV301-0010-111-4130](#)



TE Part #02560411-000
[LVDT MHR 500 ASSY](#)



TE Part #EL95182001
[VERSAFIT-3/16-4-STK](#)



TE Part #5053032054
[RNF-100-1/8-9-STK](#)



TE Part #DT06-12SA
[PLG, 12P, GRY, N, A](#)

TE Part #4-1616296-9
[41526010=P C BOARD ASSM](#)

TE Part #6-1616303-3
[42736030=PIGTAIL & CONTACT](#)

TE Part #6-1616303-4
[42736040=PROTO PIGTAIL & CONTA](#)

Documents

Product Drawings

[RT-1145-OX-12-0](#)

English

Datasheets & Catalog Pages

[Raychem Molded Parts Visual Guide](#)

English

Product Specifications

[Product Specification](#)

RT-1145-OX-12-0

Heat Shrink Tubing, Black, 3.8:1, Single Wall, Shrinks To 16 mm [.63 in], Crosslinked Fluoroelastomer, 60.2 mm [2.37 in] Expanded Inside



English